


SE1470

AlGaAs Infrared Emitting Diode

FEATURES

- Compact metal can coaxial package
- 24° (nominal) beam angle
- 880 nm wavelength
- Higher output power than GaAs at equivalent drive currents
- Wide operating temperature range (-55°C to +125°C)
- Mechanically and spectrally matched to SD1420 photodiode, SD1440 phototransistor and SD1410 photodarlington

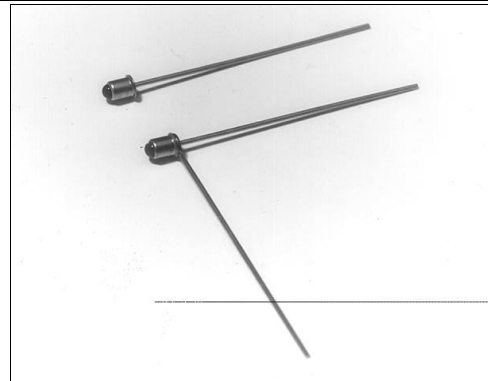

INFRA-63.TIF


DESCRIPTION

The SE1470 is a high intensity aluminum gallium arsenide infrared emitting diode mounted in a glass lensed metal can coaxial package. The package may have a tab or second lead welded to the can as an optional feature (SE1470-XXXL). Both leads are flexible and may be formed as required to fit various mounting configurations. These devices typically exhibit 70% greater power intensity than gallium arsenide devices at the same forward current.

OUTLINE DIMENSIONS in inches (mm)


Tolerance 3 plc decimals ±0.005(0.12)
2 plc decimals ±0.020(0.51)

SE1470-XXX

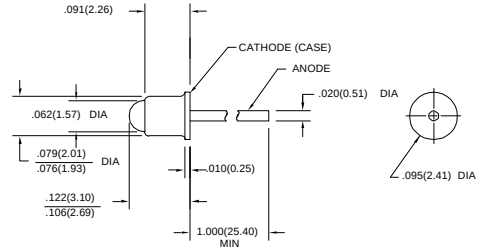

DIM_001a.ds4

SE1470-XXXL

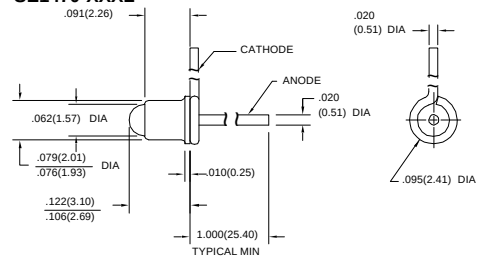

DIM_001b.ds4

SE1470


AlGaAs Infrared Emitting Diode

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)						
PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Irradiance ⁽¹⁾	H				mW/cm²	I _F =20 mA
SE1470-001, SE1470-001 L		0.35				
SE1470-002, SE1470-002 L		0.65				
SE1470-003, SE1470-003 L		1.10	4.5			
SE1470-004, SE1470-004 L		1.65				
Forward Voltage	V _F			1.8	V	I _F =50 mA
Reverse Breakdown Voltage	V _{BR}	3.0			V	I _R =10 µA
Peak Output Wavelength	λ _p		880		nm	
Spectral Bandwidth	Δλ		80		nm	
Spectral Shift With Temperature	Δλ _p /ΔT		0.2		nm/°C	
Beam Angle ⁽²⁾	Ø		24		degr.	I _F =Constant
Radiation Rise And Fall Time	t _r , t _f		0.7		µs	

Notes
 1. Measured in mW/cm² into a 0.104 (2.64) diameter aperture placed 0.535(13.6) from the lens tip.
 2. Beam angle is defined as the total included angle between the half intensity points.

ABSOLUTE MAXIMUM RATINGS	
(25°C Free-Air Temperature unless otherwise noted)	
Continuous Forward Current	50 mA
Power Dissipation	75 mW ⁽¹⁾
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-65°C to 150°C
Soldering Temperature (10 sec)	260°C

Notes
 1. Derate linearly from 25°C free-air temperature at the rate of 0.71 mW/°C.



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

SE1470

AlGaAs Infrared Emitting Diode

Fig. 1 Radiant Intensity vs Angular Displacement

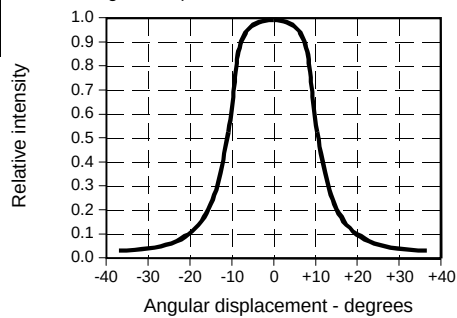


Fig. 2 Radiant Intensity vs Forward Current

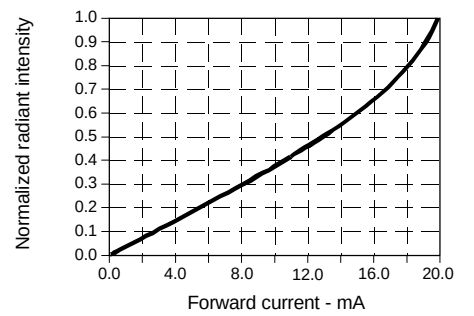


Fig. 3 Forward Voltage vs Forward Current

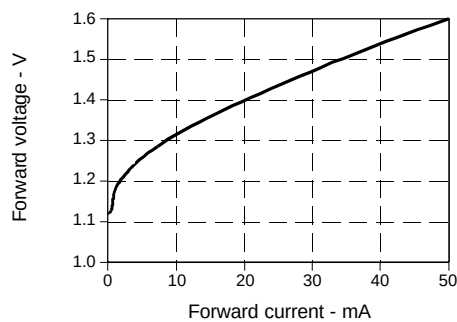


Fig. 4 Forward Voltage vs Temperature

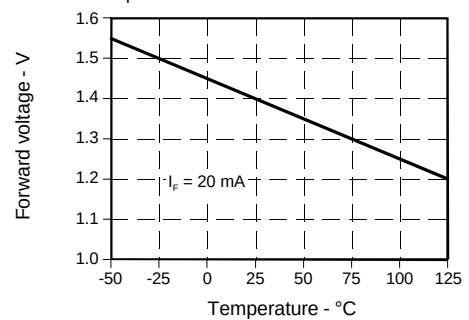


Fig. 5 Spectral Bandwidth


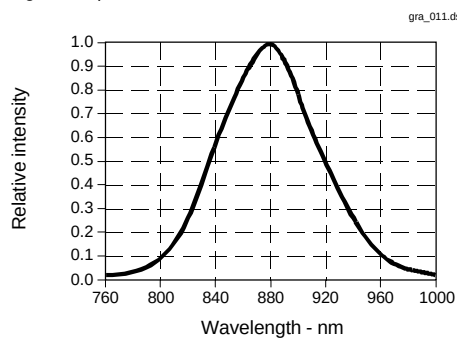


Fig. 6 Coupling Characteristics with SD1440

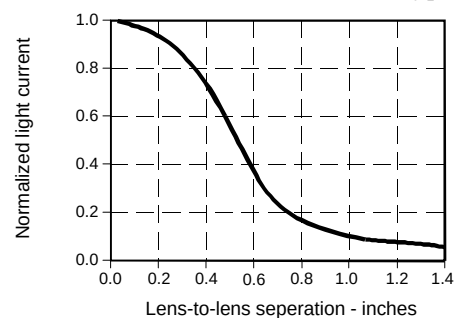


SE1470

AlGaAs Infrared Emitting Diode

Fig. 7 Relative Power Output vs
Free Air Temperature

gra_130.ds4

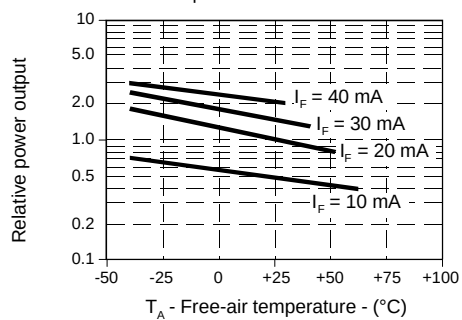

All Performance Curves Show Typical Values

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com