

POWER TRANSFORMER MOUNT: WORLD SERIES

VPP12-200

Electrical Specifications (@25C)

1. Maximum Power: 2.5VA

2. Input: Series: 230VAC, 50/60Hz; Parallel: 115VAC, 50/60Hz 3. Output: Series1: 12.6V CT@ 0.2A; Parallel2: 6.3V @ 0.4A 4. Voltage Regulation: 25% TYP @ full load to no load

5. Temperature Rise: 30C TYP (45C MAX allowed)

6. Insulation Resistance: $100M\Omega$

7. Hipot: 4000VAC between primary to secondary and windings to core.



Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

Safety:

Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:







Agency File:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose. UL: File E65390, UL 5085-1 and 3 (formerly UL1585), Class 2/3.

CSA: File LR 221330. C22.2 NO. 66, General Purpose.

TUV: File R72103639, EN 60950, (IEC950) information Technology Equipment.

A.	Dimensions:	

A. Dimer	Units: In inches						
А	В	С	D	Е	F	G	Н
1.062	1.125	0.187	0.200	0.250	1.312	1.625	1.000

B. PIN DIM.: 0.025 SQ C. WT Lbs.: 0.25

D. Mounting Holes: 0.112 dia. x 2.0

Connections³:

Input: Series - Pin 1 to Pin 6, Jumper Pin 4 to Pin 3


Parallel - Pin 1 to Pin 6, Jumper Pin 1 to Pin 4 and Pin 3 to Pin 6

Output: Series – Pin 7 to Pin 12, Jumper Pin 9 to Pin 10

Parallel - Pin 7 to Pin 12, Jumper Pin 7 to Pin 10 and Pin 9 to Pin 12

RoHS Compliance: Meets the requirements of 2002/95/EC, known as the RoHS initiative.


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.



Inherently limited. No fusing required. Class 2.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

22520B Temescal Canyon Road Corona, California 92883

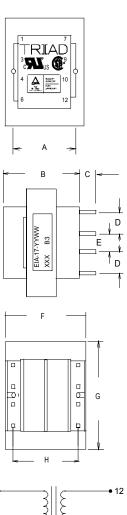

SCHEMATIC

Publish Date: November 7, 2012

³ Primary and secondary windings are designed to be connected in series or parallel. Winding are not intended to be used independently.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com