

conga-BAF

High graphics performance with low power consumption




- Based on AMD Embedded G-Series Processors
- Best price/performance ratio
- High performance graphics

COM  **Express®**

Formfactor	COM Express™ Basic (95 x 125 mm) Type II Connector Layout
CPU	AMD Embedded G-Series Processors AMD G-T56N 1.6 GHz Dual Core cache 512 kB x2 18W AMD G-T40N 1.0 GHz Dual Core cache 512 kB x2 9W AMD G-T44R 1.2 GHz Single Core cache 512 kB 9W AMD G-T40R 1.0 GHz Single Core L2 cache 512 kB 5.5W AMD G-T40E 1.0 GHz Dual Core L2 cache 512 kB x2 6.4W
DRAM	Single channel up to two 4 GB DDR3 SO-DIMM memory (up to 1066 MHz)
Chipset	AMD A55E Controller Hub
Ethernet	Gigabit Ethernet Realtek RTL8111E
I/O Interfaces	6x PCI Express™ x1 lanes 4x Serial ATA® 1x EIDE (up to UDMA 6) 8x USB 2.0 PCI Bus (Rev. 2.3 compliant 33 MHz) 2x Express™ Card
Sound	High Definition Audio Interface
Graphics	Integrated High Performance Video DirectX®11 graphics with UVD 3.0 Integrated VGA DAC Dual Simultaneous Display Support no PEG support
LVDS	2x24 Bit 800x600 to 1920x1200@60Hz; VESA standard or JEDIA data mapping; Automatic Panel Detection via EDID/EPI
DisplayPort	2x DisplayPort 1.1a shared with HDMI ports second port multiplexed with LVDS resolutions up to 2560x1600 - 18W APU 1920x1200 - 9W APU
HDMI or DVI	2x HDMI 1.3 Ports shared with DisplayPort second port multiplexed with LVDS resolutions up to 1920x1080 / 1920x1200 for DVI mode
CRT	400 MHz RAMDAC resolutions up to 2560x1600 - 18W APU 1920x1200 9W APU
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode 400 kHz multi-master) Power Loss Control
Embedded BIOS Features	AMI-Aptio UEFI BIOS with congatec Embedded BIOS features
Security	The conga-BAF can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication integrity and confidence levels.
Power Management	ACPI 3.0 with battery support
Operating Systems	Microsoft® Windows8 Microsoft® Windows7 Microsoft® Windows XP Microsoft® Windows® embedded Standard Microsoft® Windows CE 6.0 Microsoft® Windows Embedded Compact 7 Linux
Power Consumption	Typ. application: tbd. see manual for full details CMOS Battery Backup
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
Size	95 x 125 mm (3.74" x 4.92")

conga-BAF | Block diagram

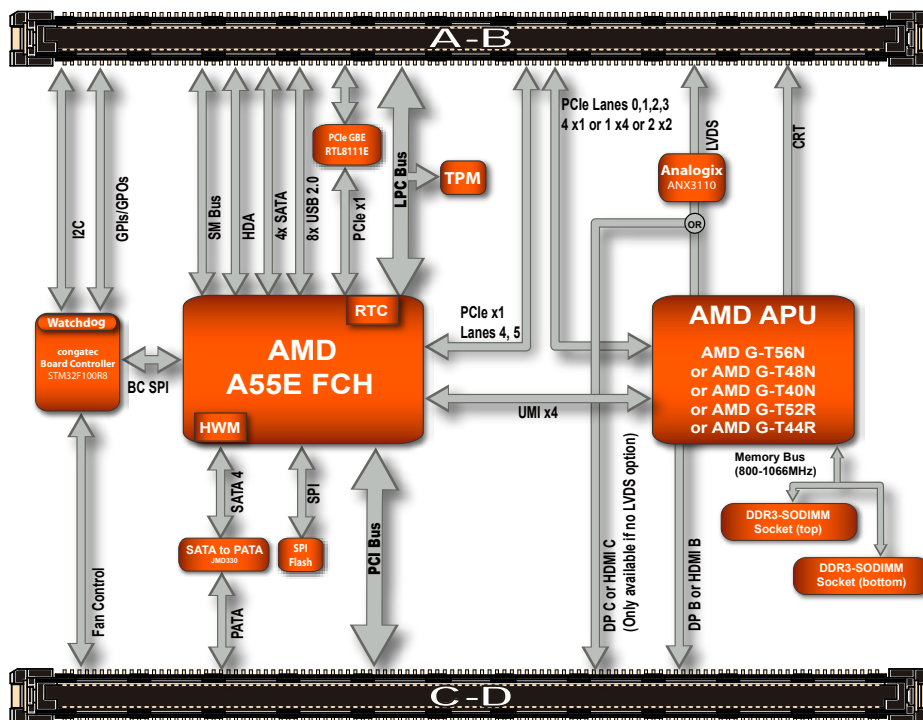

conga-BAF | Order Information

Article	PN	Description
conga-BAF/T56N	041001	AMD G-Series Dual Core Processor T56N 1.6GHz 1MB L2 cache and 1333MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40N	041003	AMD G-Series Dual Core Processor T40N 1.0GHz 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T44R	041005	AMD G-Series Single Core Processor T44R 1.2GHz 512kB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40R	041006	AMD G-Series Single Core Processor T40R 1.0GHz 5.5W 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40E	041007	AMD G-Series Dual Core Processor T40E 1.0GHz 6.5W 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/HSP-B	041020	Standard passive cooling solution for module conga-BAF. All standoffs are with 2.7mm bore hole
conga-BAF/HSP-T	041021	Standard heatspreader for COM Express Basic module conga-BAF. All standoffs are M2.5mm thread
conga-BAF/CSP-B	041025	Standard passive cooling solution for module conga-BAF. All standoffs are with 2.7mm bore hole
conga-BAF/CSP-T	041026	Standard passive cooling solution for module conga-BAF. All standoffs are M2.5mm thread
conga-BAF/CSA-B	041027	Standard active cooling solution for module conga-BAF. Integrated 12V fan. All standoffs are with 2.7mm bore hole
conga-BAF/CSA-T	041028	Standard active cooling solution for module conga-BAF. Integrated 12V fan. All standoffs are M2.5mm thread
DDR3-SODIMM-1066 (1GB)	068750	DDR3 SODIMM memory module with 1066MT/s and 1GB RAM

Accessories

conga-CEVAL	065749	Evaluation Carrier Board for COM Express Type 2 modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM PS/2 and VGA.
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used fo convert the chipset graphic ports Port-B Port-C and Port-D to the HDMI or DisplayPort Interface
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter Including cables set.
COM-Express-carrier-board-Socket-5	400007	Connector for COM-Express carrier boards height 5mm packing unit 4 pieces
COM-Express-carrier-board-Socket-8	400004	Connector for COM-Express carrier boards height 8mm packing unit 4 pieces

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com