

Features

LED DRIVER

- Universal AC Input 90-295VAC
- 250mA, 350mA, 500mA, 700mA Output
- Constant Current Operation
- Isolation 3.75kVAC
- Overcurrent and Short Circuit Protection
- IP67 Rated

Selection Guide

Part Number	Rated Power (W)	Output Current (mA)	Output Voltage (VDC)	Constant Current Range (VDC)	Efficiency (min.)
RACD07-250	7	250	28	14 - 28	75%
RACD07-350	7	350	21	10 - 20	70%
RACD07-500	7	500	14.5	5 - 14.5	70%
RACD07-700	7	700	11	3 - 10.5	70%

Specifications (measured at 115VAC / 230VAC and 25°C ambient temperature)

Input Voltage Range	90-295 VAC or 120-415VDC	
Rated Power	7W nom.	
Input Frequency Range	47-63Hz	
Current Accuracy	±3% typ. / ±7% max.	
Output Current Ripple	30mA _{p-p} typ.	
Voltage Accuracy (includes load, line and tolerance)	±5%	
AC Input Current	0.2A	
Start-up Time	<1S	
Hold-Up Time	18ms min.	
Operating Frequency	45kHz	
Isolation Voltage	3.75kVAC / 1 minute	
Short Circuit Protection	Continuous	
Over Current Protection	Constant Current Mode Protection	
Overload Protection	105% - 120% typ.	
No Load Voltage	RACD07-250	29.3V
	RACD07-350	21.8V
	RACD07-500	15.1V
	RACD07-700	11.9V
Output Overvoltage Protection	Zener Diode Clamp	
Storage Humidity	10% - 90% RH	
Operating Humidity	20% - 90% RH Non-Condensing	
Operating Temperature Range (free air convection)	Ambient Temperature	-20°C to +40°C
	Case Temperature	65°C max.
Storage Temperature Range	-40°C to +80°C	
IP Rating	IP67	
Isolation Resistance	100MΩ / 500VDC at 25°C	
PCB Material	(UL94V-0)	Plastic Resin with Fibreglass
Case Material	(UL94V-0)	Plastic
Weight	74g	
Dimension	57 x 41 x 24mm	
Packing Quantity	25pcs	

continued on next page

LIGHTLINE
AC/DC-Converter
with 3 year Warranty

RECOM

**7 Watt
Single
Output**



**UL 8750 Certified
EN 61347 Certified
EN 61347-2-13 Certified**

RACD07

Refer to Application Notes

Specifications (measured at 115VAC / 230VAC and 25°C ambient temperature)


Safety Standards		
UL General Safety	(E340696)	UL8750 (based on 1310)
General Safety	(Report 1201032E-01)	EN61347-1
LVD Safety	(Report PSE101-0791)	EN61347-2-13
EMC Harmonics	(Report 1201032E-01)	EN61000-3-2
EMC Flicker	(Report 1201032E-01)	EN61000-3-3
EMC Emissions (	Report 1201032E-01)	EN55015
Design Lifetime		70 x 10 ³ hours max.
MTBF (+25°C)	using MIL-HDBK 217F	200 x 10 ³ hours min.

Notes:

1. All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.
2. The use of a circuit breaker with C-characteristic is recommended.

Typical Characteristics


Input Voltage vs. Output Load

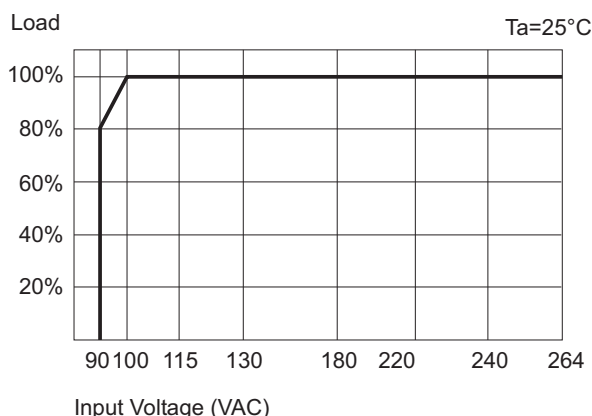

Maximum Number of LED drivers
per circuit breakers

Condition	Circuit Breaker	Circuit Breaker Current			
		10A	16A	20A	25A
115VAC, 10hm 90° phase angle	C	101	128	171	228
230VAC, 10hm 90° phase angle	B	61	100	121	150
	C	121	164	221	291
277VAC, 10hm 90° phase angle	B	70	115	139	172
	C	139	188	254	334

Package Style & Pinning

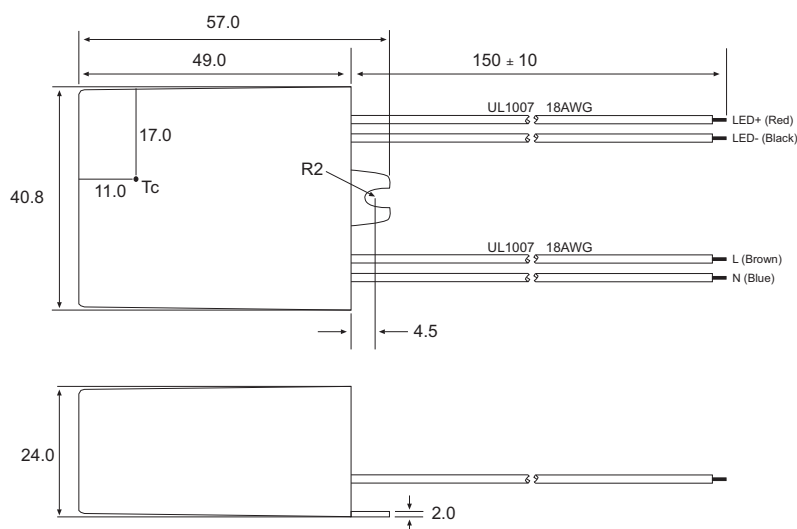

Wire Connections

Wire	Function
Red	LED+
Black	LED-
Brown	VAC in (L)
Blue	VAC in (N)

Tolerance

XX.X = +/- 0.2mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com