


XL-25 with Li-98

Ceramic Heat Spreader with Thermal Tape

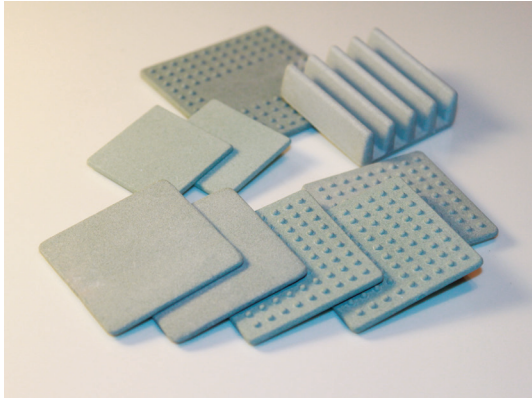

XL-25 Features

Large contact area
Low weight
High breakdown voltage
Excellent heat spreader
Custom shapes possible


Applications

LED / Notebook PC / M/B / Power Transistor / Power Module / CPU / Chip IC




Sizes (mm)

XL-25 30 x 30 x t2.0mm +Li98C
28 x 28 x t0.15mm (With pull tab 5.0mm)


XL-25 20x20xt2.0mm +Li98C
18 x 18 x t0.15mm (With pull tab 5.0mm)

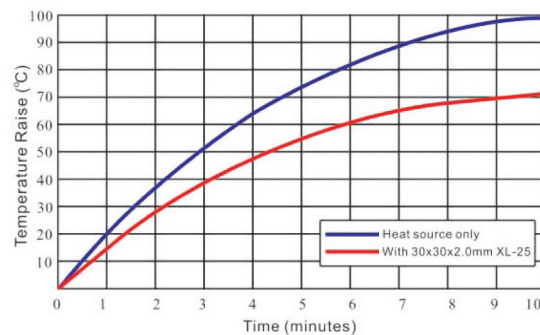

Used examples: Heat sources with XL-25

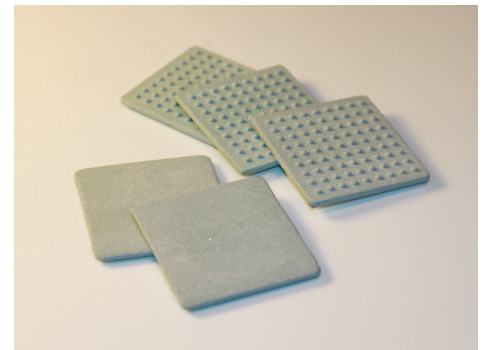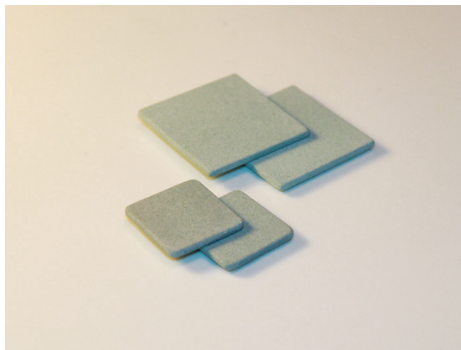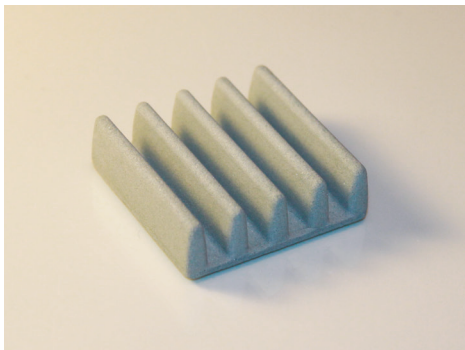

Property	XL-25	Unit	Test Method
Colour	Grey	-	Visual
Thermal Conductivity	6.79	W/m.k	-
Dielectric Breakdown Voltage	>500	Voltage	ASTM D149
Specific Gravity	1.89	g/cm ³	CNS 619
Surface Resistance	>10 ⁹	Ohm	ASTMD 257
Flexural Strength	47.5	Kgf/cm ²	CNS 12701
Porosity	30	%	CNS 619
Working Temperature	>500	°C	-
Linear Temperature Expansion Coefficient	4.13	10/06/11	RT~300 °C
Main Composition	SiC / Al ₂ O ₃ / SiO ₂	-	-
Hardness	5~6	Moh's	DIN EN101-1992

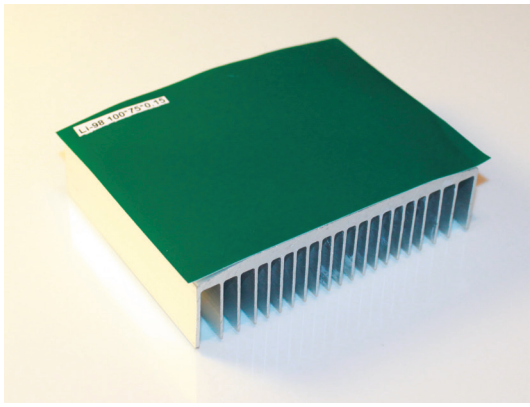

Li-98 Features



Good adhesion
Very good thermal conductivity
Highly compressible
Easy to assemble

Applications

Electronic components: IC / CPU / MOS
LED / M/B / P/S / Heat Sink / LCD-TV / Notebook PC / PC / Telecom Device /
Wireless Hub etc....
DDR II Module / DVD Applications / Hand-Set applications etc...

Properties

Property	Li-98		Li-98C	Li98CN	Unit	Test Method
Thickness	0.15	0.25	0.2	0.18		ASTM D374
Colour	White	White	White	White		Visual
Reinforcement carrier	Fibreglass mesh					
Density	1.85	1.85	1.9	1.8	g/cm ³	ASTM D792
Tensile strength	200	400	200	50	psi	ASTM D412
Glass transition temperature	-30	-30	-27	-30	°C	
Short time use temperature (30sec)	200	200	200	200	°C	
Continuous working temperature	-30 to 120	-30 to 120	-30 to 120	-30 to 120	°C	
Thermal conductivity	0.95	0.95	1.8	2	W/mK	ASTM D5470
Thermal impedance @ <1psi	1.0	1.8	0.7	0.6	C in 2/W	ASTM D5470
Thermal impedance @ 50psi	0.9	1.5	0.5	0.3	C in 2/W	ASTM D5470
Initial tack	11	10	14	15	cm	PSTC-6
Lap shear strength	61	61	65	55	N/cm ²	ASTM D1002
Die shear strength @ 25 °C	120	120	118	100	N/cm ²	-
Die shear strength @ 80 °C	69	69	68	55	N/cm ²	-
Holding power 1000g @ 25 °C using 1 in ²	>10000	>10000	>10000	>10000	min	PSTC-7
Holding power 1000g @ 80 °C using 1 in ²	>10000	>10000	>10000	>10000	min	PSTC-7
180° peeling strength (aluminium)	4	5	4	3	N/cm	ASTM D3330
Dielectric breakdown voltage (Vac)	>2	>3	>3	>5	kV	ASTM D149
Dielectric breakdown voltage (Vdc)	>3	>4	>4	>6	kV	ASTM D149

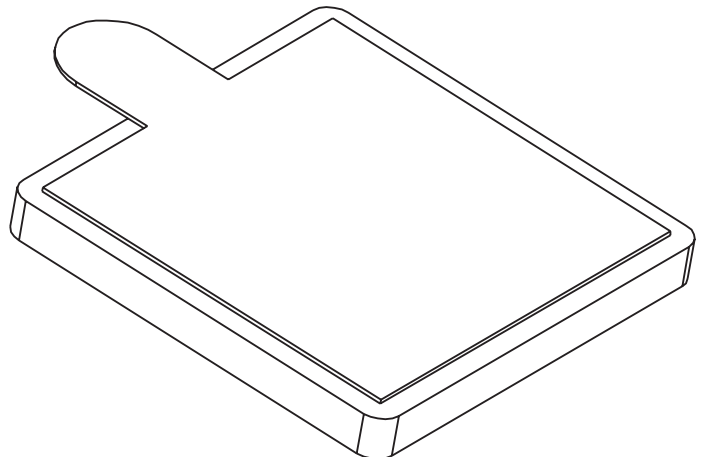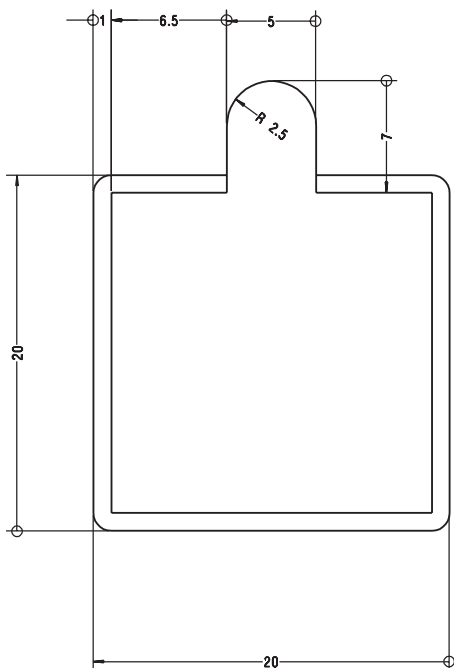

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com