

# MABAES0060



## E-Series RF 1:1 Flux Coupled Transformer 0.3 - 200 MHz

Rev. V5

### Features

- Surface Mount
- 1:1 Impedance Ratio
- CT on Secondary
- RoHS\* Compliant version of the ETC1-1T
- Tape and reel packaging available

### Description

M/A-COM's MABAES0060 is a RoHS compliant device that is equivalent to the ETC1-1T transformer. This device is a 1:1 RF flux coupled transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. The MABAES0060 transformer is offered in an SM-22 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.




### Electrical Specifications: $T_A = 25^\circ\text{C}$ , $Z_0 = 50\Omega$ <sup>1</sup>

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	0.3 - 200	MHz	—	—	—
Insertion Loss	—	0.3 - 200	dB	—	—	1.5
Amplitude Imbalance	—	0.3 - 50 0.3 - 200	dB dB	— —	— —	0.1 0.5
Phase Imbalance	—	0.3 - 50 0.3 - 200	Degrees Degrees	— —	— —	1.0 5.0
Input Return Loss	—	0.3 - 200 5 - 120	dB dB	— —	— —	10.0 15.0

### Pin Configuration


Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

### Schematic

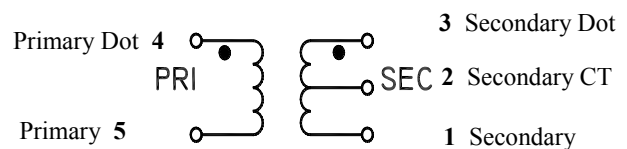


## Typical Performance Curves Over Bandwidth (300kHz - 200MHz)


**Insertion Loss**

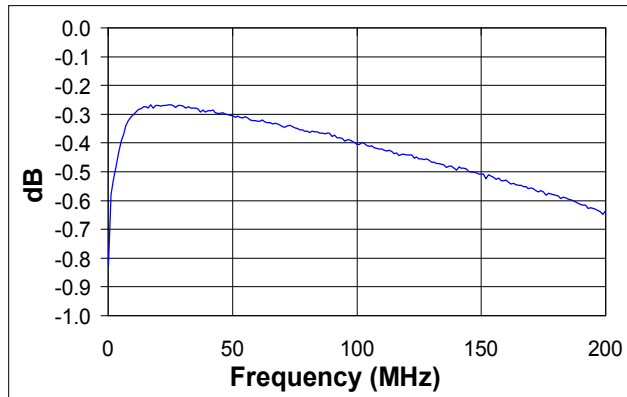


**Phase Unbalance**

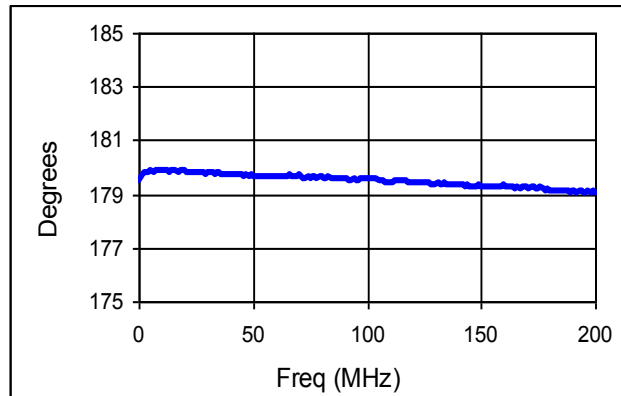


**Amplitude Unbalance**

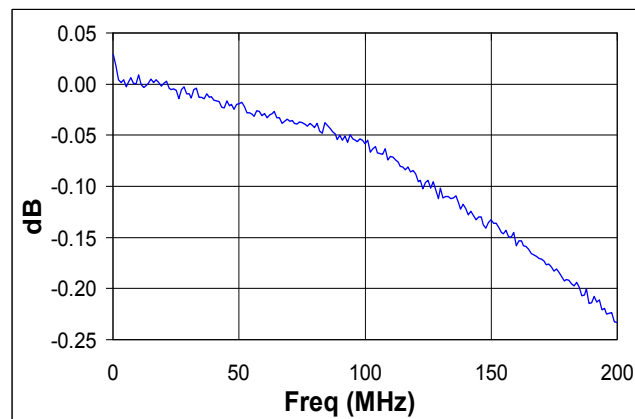

**Input Return Loss**

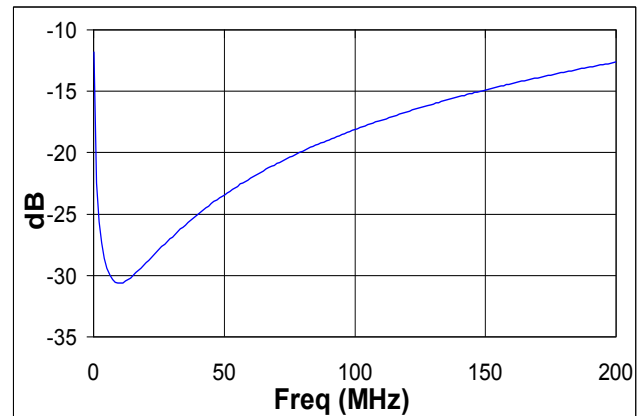

## Outline Drawing

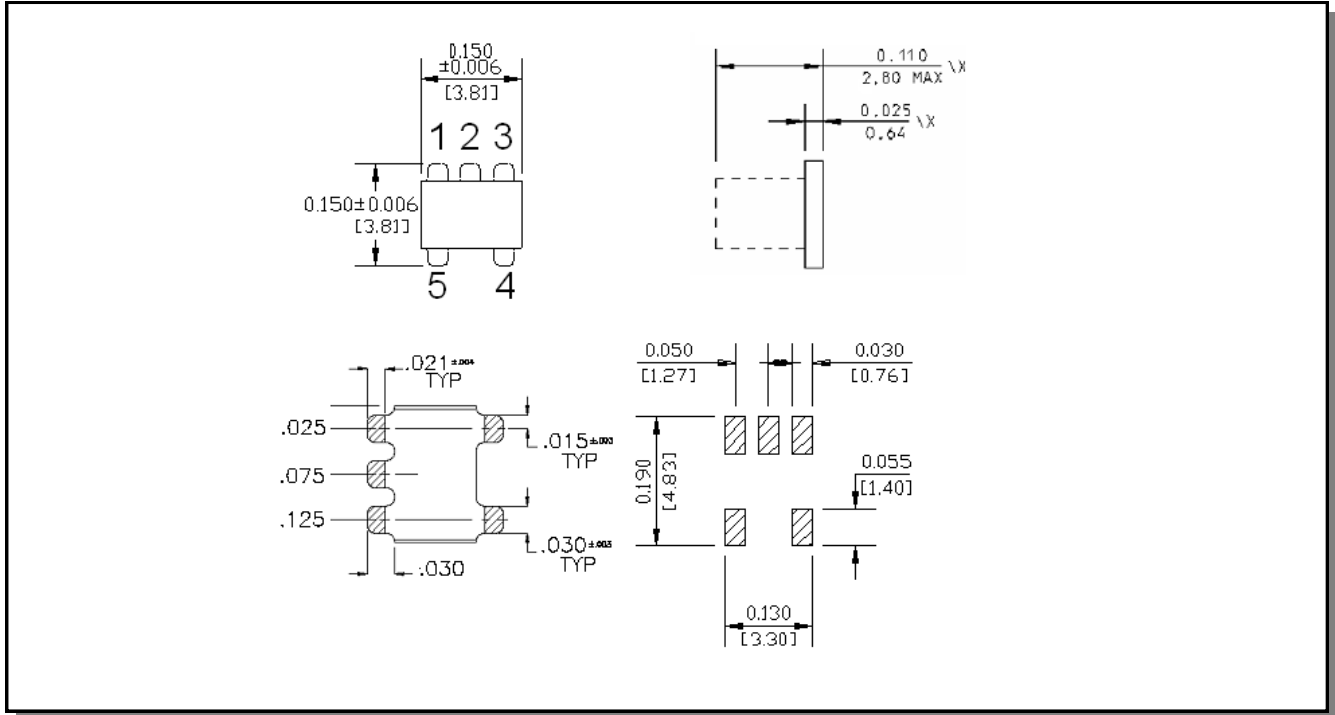

1. Dimensions are in inches (mm)
2. Tolerance:  $\pm 0.015$ " (0.38mm) unless otherwise noted.
3. Model number and lot code printed on reel.
4. Plating finish: ENIG on both sides, 0.05 to 0.1  $\mu$ m gold over 3 to 6  $\mu$ m nickel

## Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel size	mm	330
Tape width (W)	mm	12.0
Pitch (P <sub>1</sub> )	mm	8
A <sub>0</sub>	mm	4.0
B <sub>0</sub>	mm	4.0
K <sub>0</sub>	mm	2.9
Orientation	-	F5
Reference Application note ANI-019 for orientation		

## Absolute Maximum Ratings <sup>1,2</sup>

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	240 mA <sup>2</sup>
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.
2. The maximum DC current applies to the secondary center tap in applications where the secondary is balanced.

# AMEYA360

## Components Supply Platform

### Authorized Distribution Brand :



### Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

### Contact Us :

#### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

#### ➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

#### ➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

#### ➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)