


5705H Series T-1 3/4 LED with Extended Leads-Ultra Brite Non-Diffused Narrow Beam

Description and Features

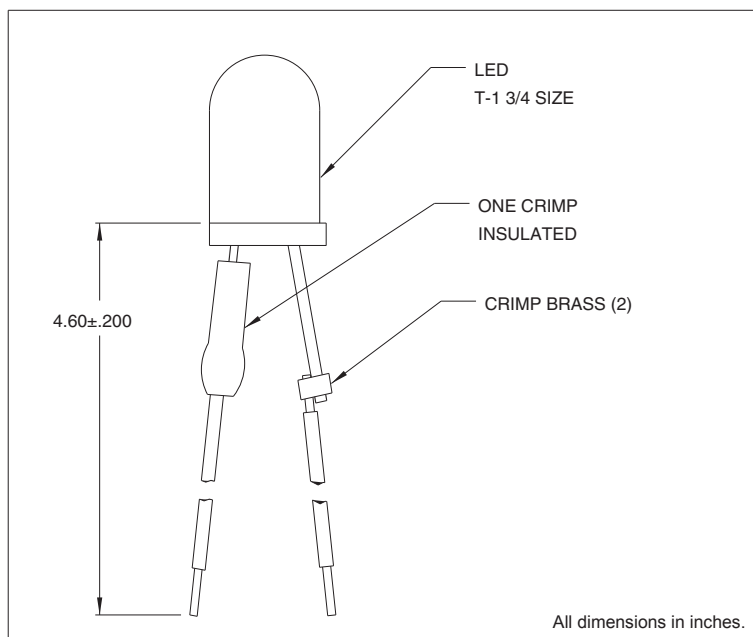

T-1 3/4 Brite LEDs

Wire Leads: No. 24AWG 4.60±.200 STRIPPED
.430/.570

Anode(+): Red Lead

Lens: Ideal for use with 4311 or SQL 360 Series lenses

Electro-Optical Characteristics and Ratings

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Forward Voltage		Continuous Forward Current Max. (mA)	Reverse Breakdown Voltage Min. (V).	Peak Wave Length (nm)
				Typ. (V)	Max. (V)			
5705H5	Green	100	20	2.1	3.0	60	4	563

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com