

Features

Unregulated Converters

- SMD Case Style
- Tape and Reel Packaging
- UL-60950-1 Certified
- High Operating Temperature Range from -40°C to 100°C
- Efficiency up to 76%
- 2kVDC isolation

RECOM
DC/DC Converter

R1SE/H2

1 Watt
SMD
Single Output



Description

The R1SE/H2 series are 1W unregulated DC/DC converters that are lower cost than equivalent converters. The benefits of high volume production and semi-automatic assembly allow for a lower selling price without sacrificing our high quality standards. They are UL certified for safety, offer reasonable efficiency and still meet the full industrial operating temperature range of -40° to +100°C. All converters are 100% tested in production and carry our 3-year warranty.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	max. Capacitive Load ⁽¹⁾ (μF)
R1SE-3.305/H2-R	3.3	5	200	75	1000
R1SE-0505/H2-R	5	5	200	75	1000
R1SE-0512/H2-R	5	12	84	76	330
R1SE-0515/H2-R	5	15	66	76	220
R1SE-1205/H2-R	12	5	200	73	1000
R1SE-1505/H2-R	15	5	200	74	1000

Notes:


Note1: Max. capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Specifications (measured at T_a= 25°C, nominal input voltage and rated current unless otherwise specified)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range				±10%
Operating Frequency Range	V _{in} nominal	20kHz	60kHz	100kHz
Output Ripple and Noise ⁽²⁾	20MHz BW		50mVp-p	100mVp-p

Efficiency vs. Load

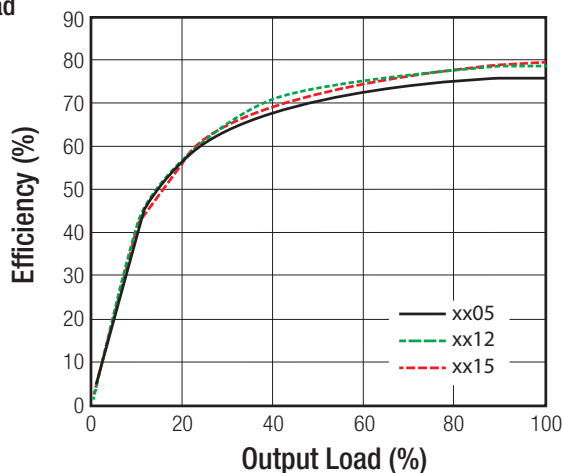

Notes:

Note2: Measurements are made with a 100nF MLCC across output. (low ESR)



UL
cUL
E358085

UL-60950-1 Certified



Refer to Applications Notes

Specifications (measured at $T_a = 25^\circ\text{C}$, nominal input voltage and rated current unless otherwise specified)


REGULATIONS

Parameter	Condition	Values
Output Voltage Accuracy		-2% typ. / $\pm 5\%$ max.
Line Voltage Regulation	low line to high line, max. load	$\pm 1\%$ typ. / $\pm 1.5\%$ max.
Load Voltage Regulation	20% - 100% load	$\pm 6\%$ typ. / $\pm 10\%$ max.

Deviation vs. Load

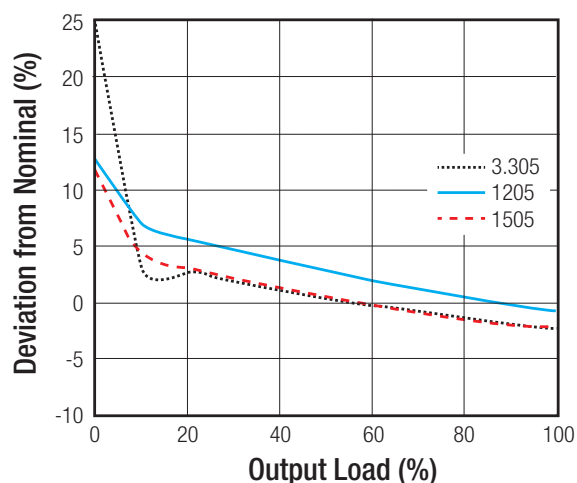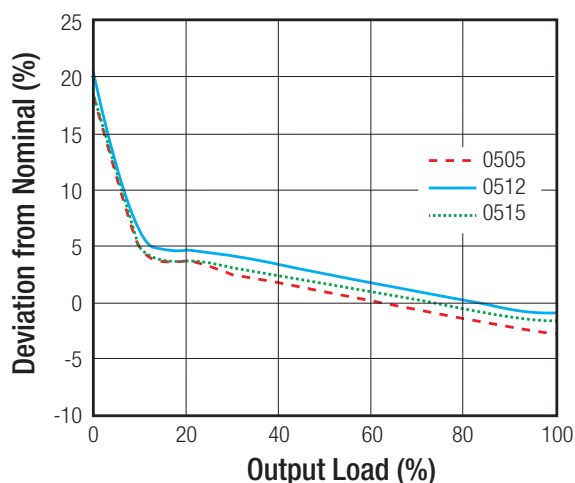

Tolerance Envelope

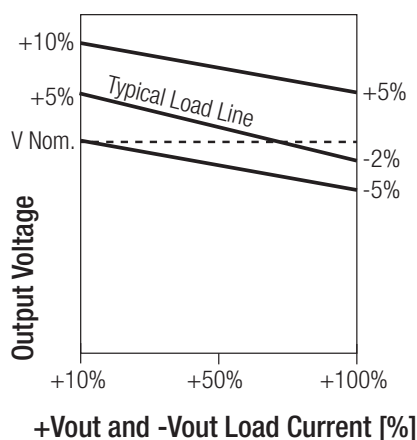

PROTECTIONS

Parameter	Condition	Value
Isolation Voltage		2kVDC / 1 second
Isolation Capacitance		75pF max.
Isolation Resistance	Viso= 500V	10G Ω min.


ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range		-40°C to +100°C
Operating Humidity	non-condensing	95% RH max.
MTBF (+25°C) (+85°C)	according to MIL-HDBK-217F, full load	2992 x 10 ³ hours 955 x 10 ³ hours

continued on next page

Specifications (measured at $T_a = 25^\circ\text{C}$, nominal input voltage and rated current unless otherwise specified)

Derating Graph

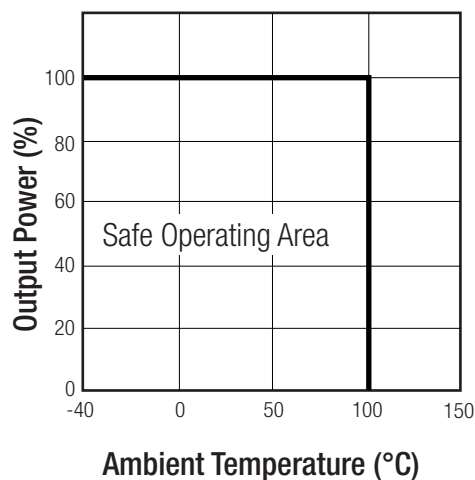


SAFETY AND CERTIFICATIONS

Certificate Type	Report / File Number	Standard
UL General Safety	E358085-A2	UL-60950-1, 2nd Edition CAN/CSA C22.2 No. 60950-1-07, 2nd Edition

DIMENSION and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Case Material		non-conductive black plastic
Package Dimension (LxWxH)		12.75 x 10.7 x 6.7mm
Package Weight		1.0g

Dimension Drawing (mm)

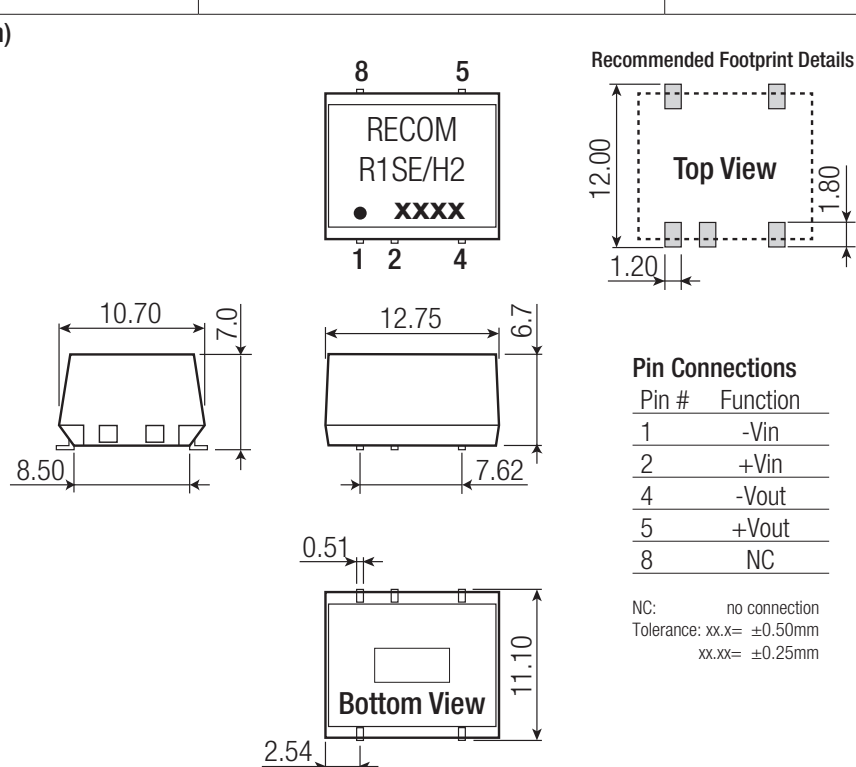

Specifications (measured at $T_a = 25^{\circ}\text{C}$, nominal input voltage and rated current unless otherwise specified)

PACKAGING INFORMATION		
Parameter	Type	Value
Storage Temperature Range		-55°C to $+125^{\circ}\text{C}$
Packaging Dimension (LxWxH)	Tape and Reel	355.0 x 342.0 x 36.0mm
Packaging Quantity		500pcs

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com