


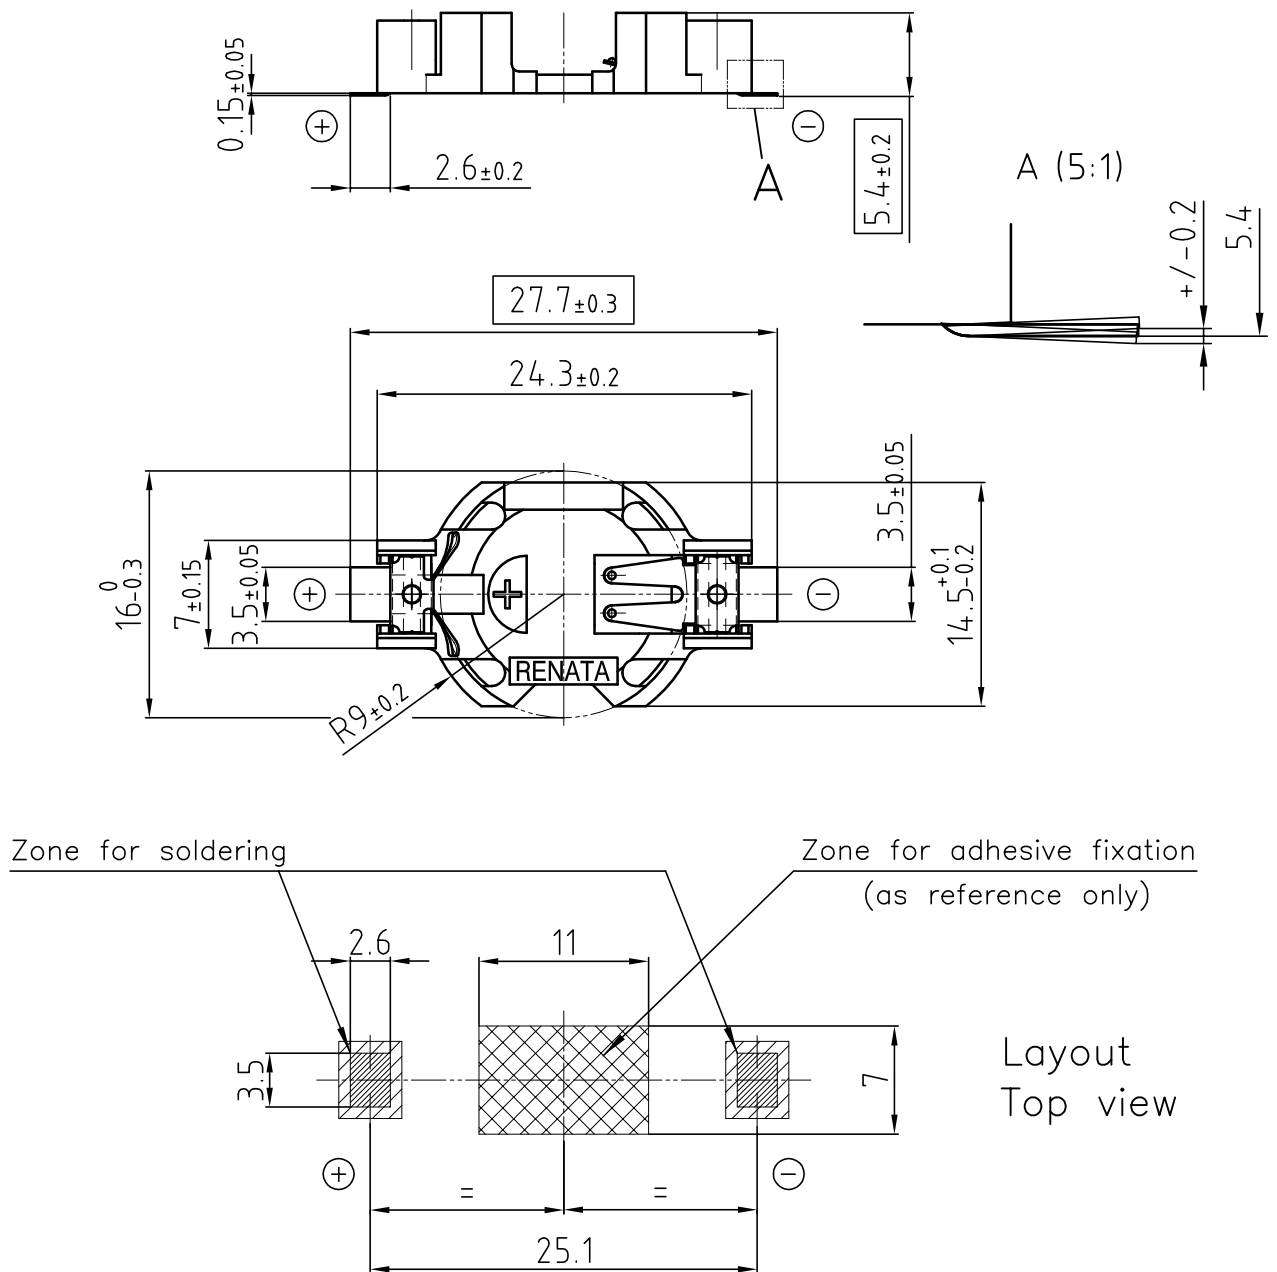

- Samples can deviate in the execution from the serie.

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated throughout

Solder contacts : spring stainless steel 301 solder area tin-plated throughout, min. thickness $5\mu\text{m}$

All framed values will be used for dimension checking !

Rev.	①	07.09.07	MCI	Rev.	○				Customer's Approval		
Rev.	②	24.10.07	SRi	Rev.	○				Date		
Rev.	③	15.09.10	Wu Ping	Rev.	○				Signature		
Titel: SMTU1632-LF								Scale 2:1	Drawn	06.04.05	SRi
									Checked	16.09.10	SRi
									Approved		
renata batteries								CH-4452 Itingen Switzerland			
								3.8811.4-3			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com