


CZRZ3V3B-HF Thru. CZRZ6V8B-HF

Voltage: 3.3 to 6.8 Volts

Power: 100mW

RoHS Device

Halogen Free




Features

- 100mW Power Dissipation.
- Voltages : 3.3V, 4.7V, 5.1V, 5.6V, 6.8V
- High reliability.
- Designed for mounting on small surface.
- Extremely thin/leadless package.

Mechanical data

- Case: 0201/DFN0603 package, molded plastic.
- Terminals: Gold plated, Solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end.
- Mounting position: Any

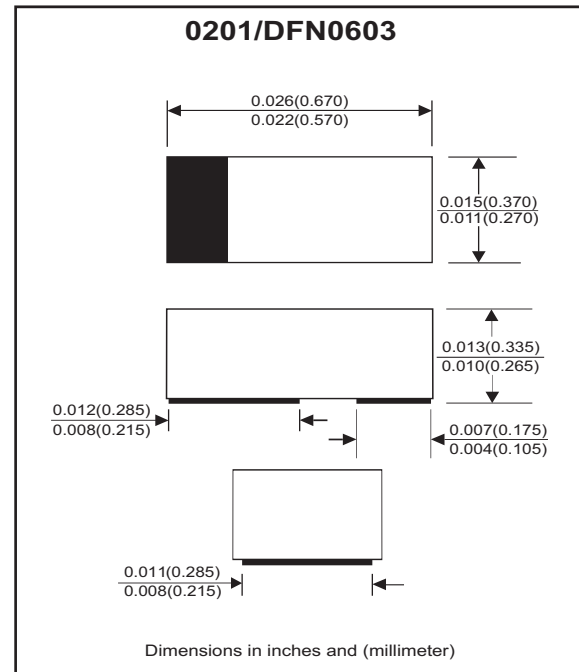

Circuit diagram



Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Forward Voltage Drop at $I_F = 10 \text{ mA}$	V_F	0.9	V
Maximum Power Dissipation at 25 °C	P_D	100	mW
Junction Temperature	T_J	150	°C
Operating Temperature Range	T_{opr}	-55 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Part Number	Zener Voltage				Operating resistance		Rising Operating Resistance		Leakage Current	
	$V_{RWM}(\text{Volts})$			$@I_{ZT}$	$Z_{ZT}(\text{Ohm})$		$Z_{ZK}(\text{Ohm})$		$I_R@V_R$	
	Min	Nom	Max	mA	Max	$I_Z(\text{mA})$	Max	$I_Z(\text{mA})$	μA	Volts
CZRZ3V3B-HF	3.1	3.3	3.5	5	100	5	1000	1.0	20	1.0
CZRZ4V7B-HF	4.4	4.7	5.0	5	100	5	800	0.5	2.0	1.0
CZRZ5V1B-HF	4.8	5.1	5.4	5	80	5	500	0.5	2.0	1.5
CZRZ5V6B-HF	5.2	5.6	6.0	5	60	5	200	0.5	1.0	2.5
CZRZ6V8B-HF	6.4	6.8	7.2	5	40	5	60	0.5	0.5	3.5

RATING AND CHARACTERISTIC CURVES

Fig.1 - Forward Characteristics

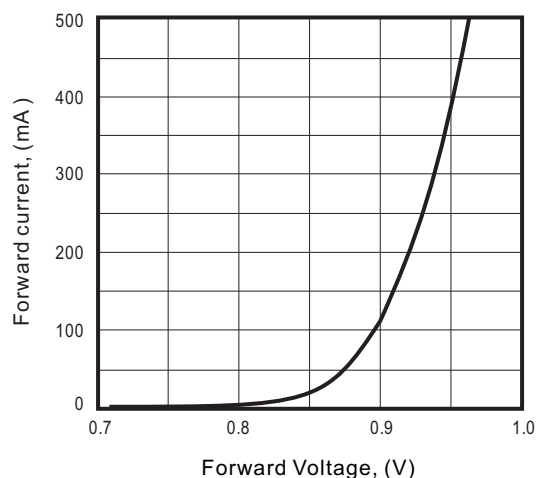


Fig.4 - Zener Breakdown Characteristics




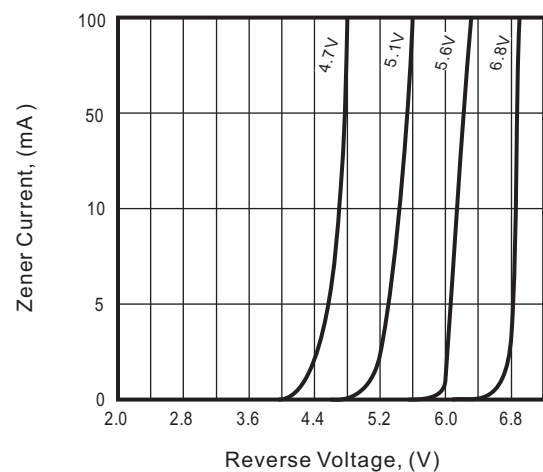


Fig.3 - Current Derating Curve

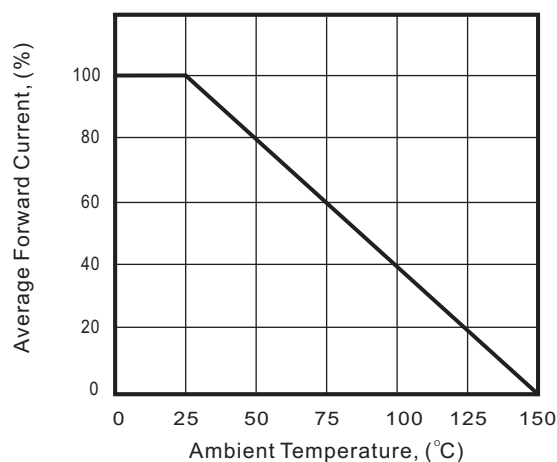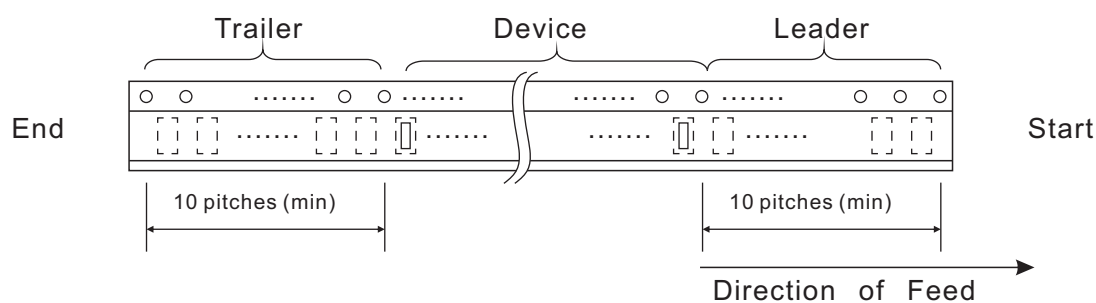

Technical drawing of a multi-hole plate. The drawing shows a top view of a rectangular plate with a central horizontal row of three circular holes and a bottom row of seven rectangular holes. Dimensions include: $P0$ (distance between centers of the first two circular holes), $P1$ (distance from the left edge to the center of the first circular hole), d (diameter of the circular holes), E (distance from the top edge to the center of the circular holes), F (distance from the center of the circular holes to the center of the rectangular holes), W (total width of the plate), B (height of the rectangular holes), A (distance between centers of the first two rectangular holes), P (distance from the right edge to the center of the last rectangular hole), T (thickness of the plate), and C (height of the rectangular holes). A small black square is located at the bottom left corner of the drawing.

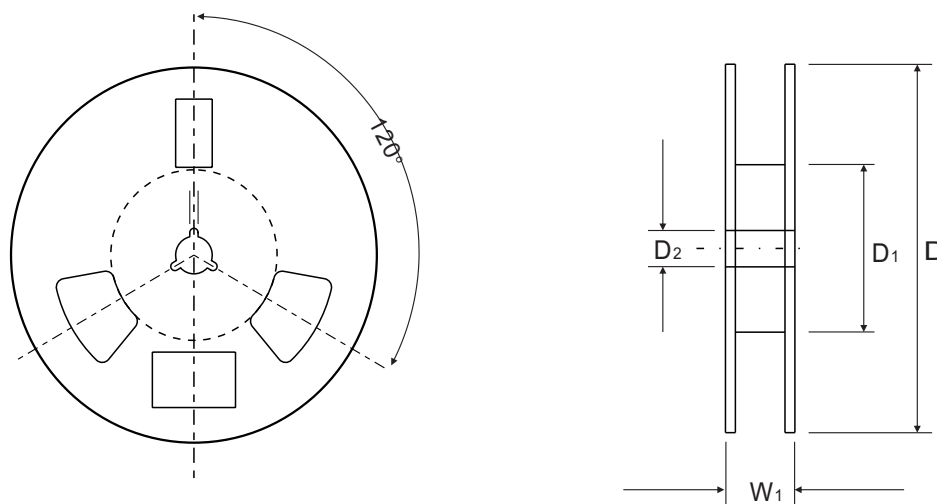

0201 (DFN0603)	SYMBOL	A	B	C	d	D	D₁	D₂
	(mm)	0.39 ± 0.03/-0.02	0.72 ± 0.03	0.36 ± 0.03	1.50 ± 0.10	178 ± 1.00	54.4 ± 0.40	13.0 ± 0.20
	(inch)	0.015 ± 0.001/0.001	0.028 ± 0.001	0.014 ± 0.001	0.059 ± 0.004	7.008 ± 0.039	2.142 ± 0.016	0.512 ± 0.008

0201 (DFN0603)	SYMBOL	E	F	P	P ₀	P ₁	T	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.05	2.00 ± 0.05	4.00 ± 0.05	2.00 ± 0.05	0.23 ± 0.05	8.00 ± 0.10	12.30 ± 0.10
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.079 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.009 ± 0.002	0.315 ± 0.008	0.484 ± 0.004

SMD Zener Diode

Marking Code


Part Number	Marking Code
CZRZ3V3B-HF	E
CZRZ4V7B-HF	I
CZRZ5V1B-HF	J
CZRZ5V6B-HF	7
CZRZ6V8B-HF	M



X = Product type marking code

Suggested PAD Layout

SIZE	0201(DFN0603)	
	(mm)	(inch)
A	0.31	0.012
B	0.20	0.008
C	0.35	0.014
D	0.15	0.006
E	0.40	0.016
F	0.66	0.026

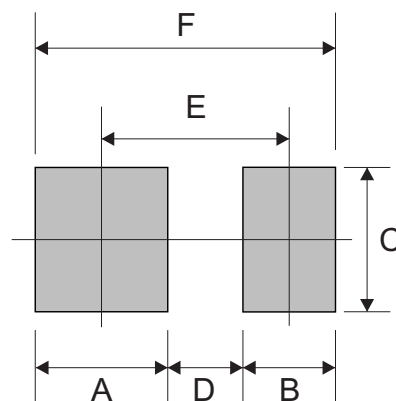

Standard Packaging

Case Type	Qty Per Reel	Reel Size
	(Pcs)	(inch)
0201/DFN0603	10,000	7

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com