

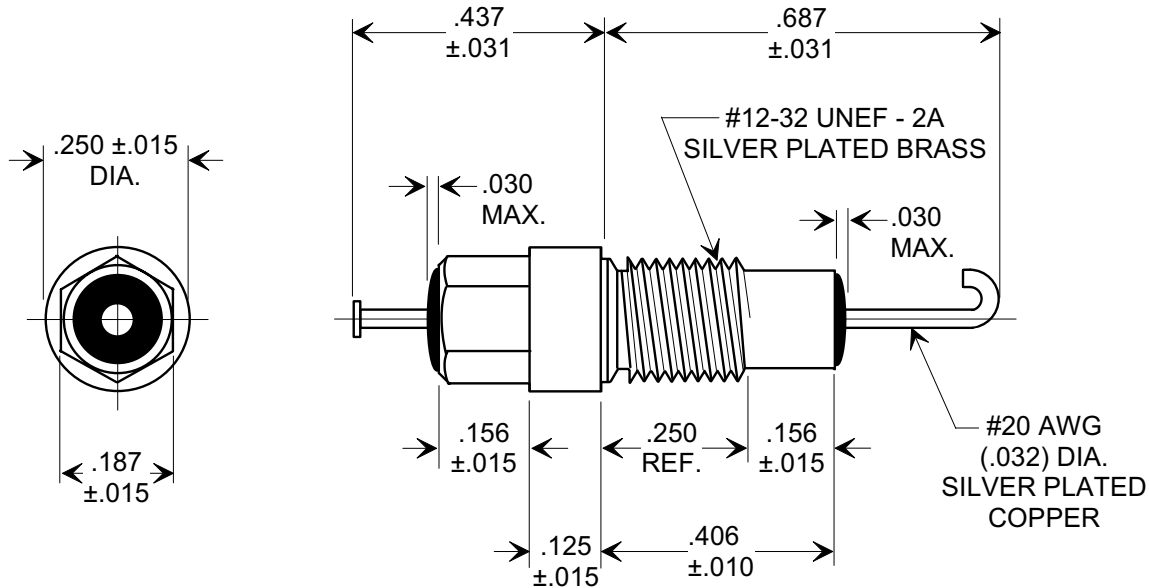


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.




MOUNTING HARDWARE

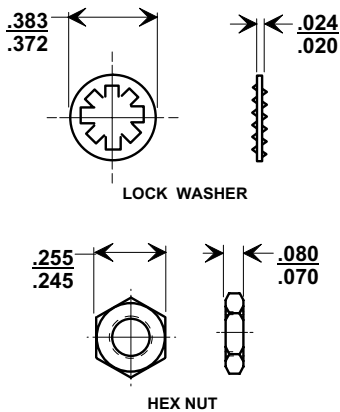

NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. FINISH: CASE - SILVER
3. MAX. RECOMMENDED MOUNTING TORQUE: 8.0 Lb.-IN.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C. SEE INSTALLATION RECOMMENDATIONS.
5. MARKING TO APPEAR ON CONSECUTIVE HEX FLATS, 2 CHARACTERS PER FLAT: MI/57/33/46/00/01.

MIL-F-15733/46-001	4000	300 VDC	10	50	65	70	70	70
MILITARY P/N	MIN. CAP.(pf)	-55 TO +125 °C	DC	50 MHz	100 MHz	200 MHz	1GHz	10 GHz
		DC WORKING VOLTAGE	CURRENT (AMPS)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				

X-2015 Rev-0	REVISION RECORD	Original Release C.O. 19990225-3-02	0		--TOLERANCES-- Unless Otherwise Specified		Title MIL-F-15733 BUSHING STYLE EMI FILTER			
					DECIMAL ± .031					
					ANGLES ± 		Drawn S.M. 03-03-99		Scale 3 X	
					TUSONIX TUCSON, ARIZONA		Approved J.Mc. 03-03-99			
							A	4207-500		

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com