

40Watts Single Output LED Driver



Features:


- Constant Voltage Design
- Universal AC input/ Full Range
- Built-in Active PFC function, PF 0.95 Typical
- High Efficiency (Up to 87%)
- Output Protections: OLP/OVP/SCP/OTP
- Lightning Protection
- Class 2 Power Unit (See Note)
- Waterproof (IP65)
- 3 Year Warranty




Model		PLV-040S012	PLV-040S018	PLV-040S024	PLV-040S036	PLV-040S048
Output Characteristics						
DC Output		12V	18V	24V	36V	48V
Rated Current See Note		3.00A (3)	2.00A (3)	1.50A (3)	1.05A (3)	0.80A (2)
Current Range		0~3.00A	0~2.00A	0~1.50A	0~1.05A	0~0.80A
Ripple and Noise (max) Note 1		±10% Vo				
Voltage Accuracy		±5% Vo				
Line Regulation		±1% Vo				
Load Regulation		±5% Vo				
Rise Time		50mS Max @ Rated Load				
Hold-up Time (Typ.)		10mS Min (110VAC input, full load), 20mS Min (220VAC input, full load)				
Input Characteristics						
Voltage Range		90VAC~305VAC				
Frequency Range		47Hz-63Hz				
Power Factor (Typical)	110VAC	>0.95	>0.95	>0.95	>0.95	>0.95
	220VAC	>0.90	>0.90	>0.90	>0.90	>0.90
Efficiency (Typical)		84%	85%	86%	87%	87%
AC Current (max)		0.60A @ 100-277VAC Input Full Load				
Inrush Current (max)		65A @ 230VAC, 25°C				
Leakage Current		0.50mA max @ 277VAC				
Protection						
Over Temperature (OTP)		110°C (Temperature of internal components); shut down, auto recover after the temperature decreases				
Over Voltage (OVP) Note 2		1.2~1.7Vo				
Short Circuit (SCP)		Long-term mode, auto recovery				
Environmental Characteristics						
Operating Temperature		-35°C~70°C				
Operating Relative Humidity		5% RH to 95% RH				
Storage Temperature		-40°C~85°C, 5% to 100% RH non-condensing				
Vibration		10 to 300Hz sweep at constant acceleration of 1.0G(Breadth: 3.5mm) for 1 Hour for each of the perpendicular axes X, Y, Z				
Waterproof Rating		IP65				
Safety Standards		UL8750, Compliance to UL1012 UL935, IEC61347				
Withstand Voltage		L/N-GND: 4kV, L-N: 2kV				
Isolation Resistance		I/P-O/P: >100M Ohms / 500VDC / 25°C / 70% RH				
EMC Emission		Compliance to EN55022(CISPR22) Class B, EN61000-3-2 Class A, EN61000-3-3				
EMC Immunity		Compliance to EN61000-3-2, 3 EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547				
Characteristics						
Life Time		More than 78,000Hrs (25°C, 80% Load)				
MTBF (MIL-HDBK-217F)		More than 490,000Hrs (25°C, 80% Load)				
Dimension (LxWxH)		95x70x32mm				
Note		1. Ripple & Noise: Measured by 20 MHz bandwidth oscilloscope and the output paralleled with a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor. 2. Latch Mode: The power supply shall return to normal operation only after the power is turned on again (1) Non-Class 2 output (USR & CNR) (2) Class 2 output (USR); Non-Class 2 output (CNR) (3) Class 2 output (USR & CNR)				

MECHANICAL SPECIFICATIONS


UNIT: mm

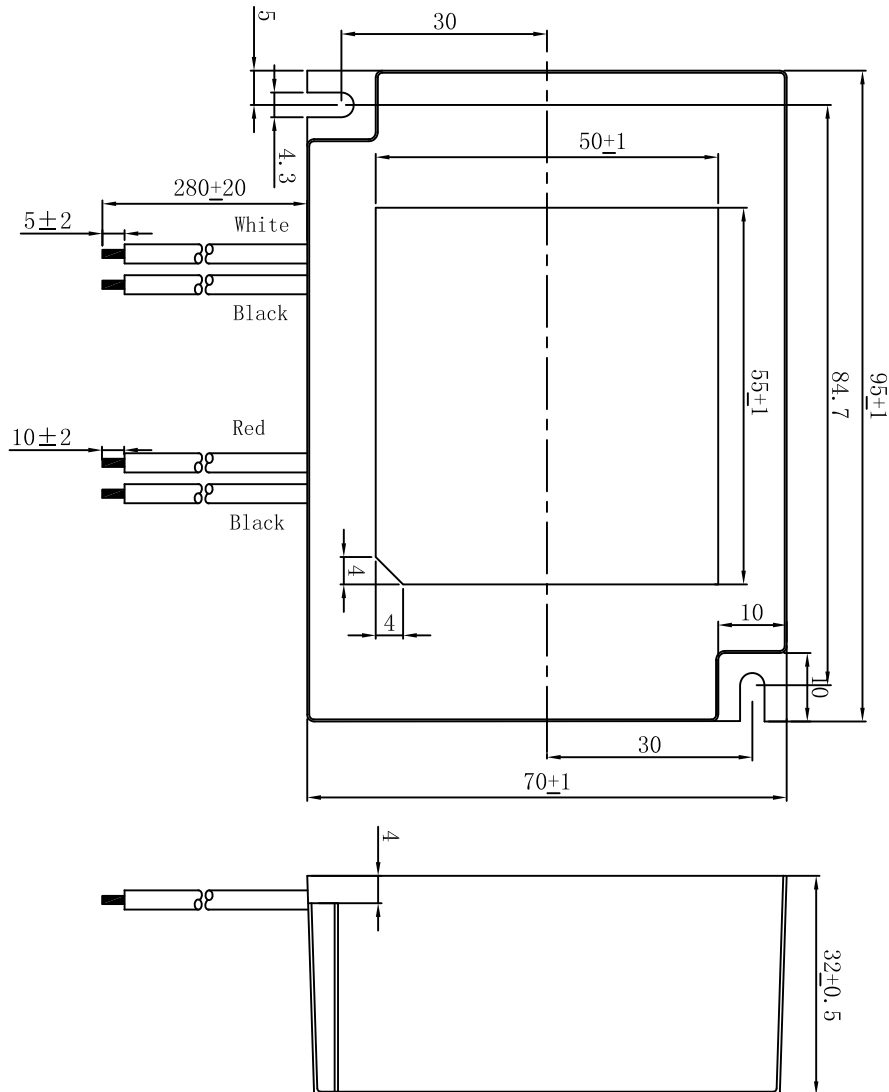

Derating Curve

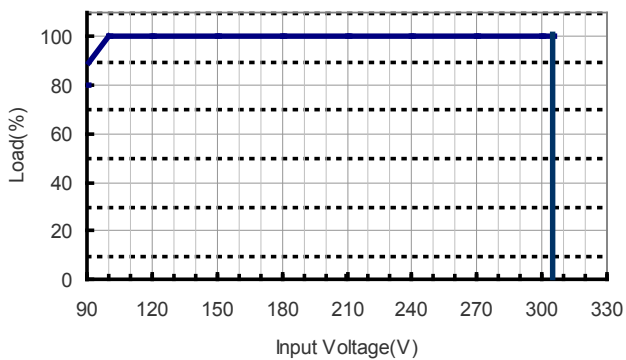

Ambient Temperature vs. Load

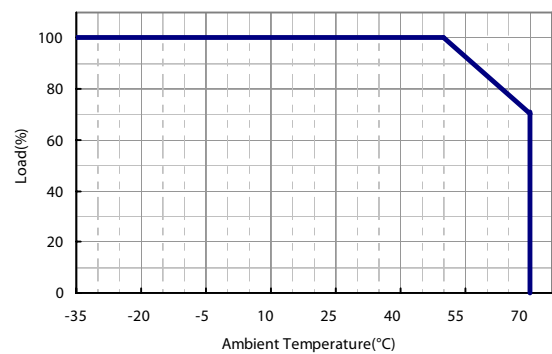

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com