



REV.	DESCRIPTION/ECO NO.	DATE
RELEASED		3/10/03

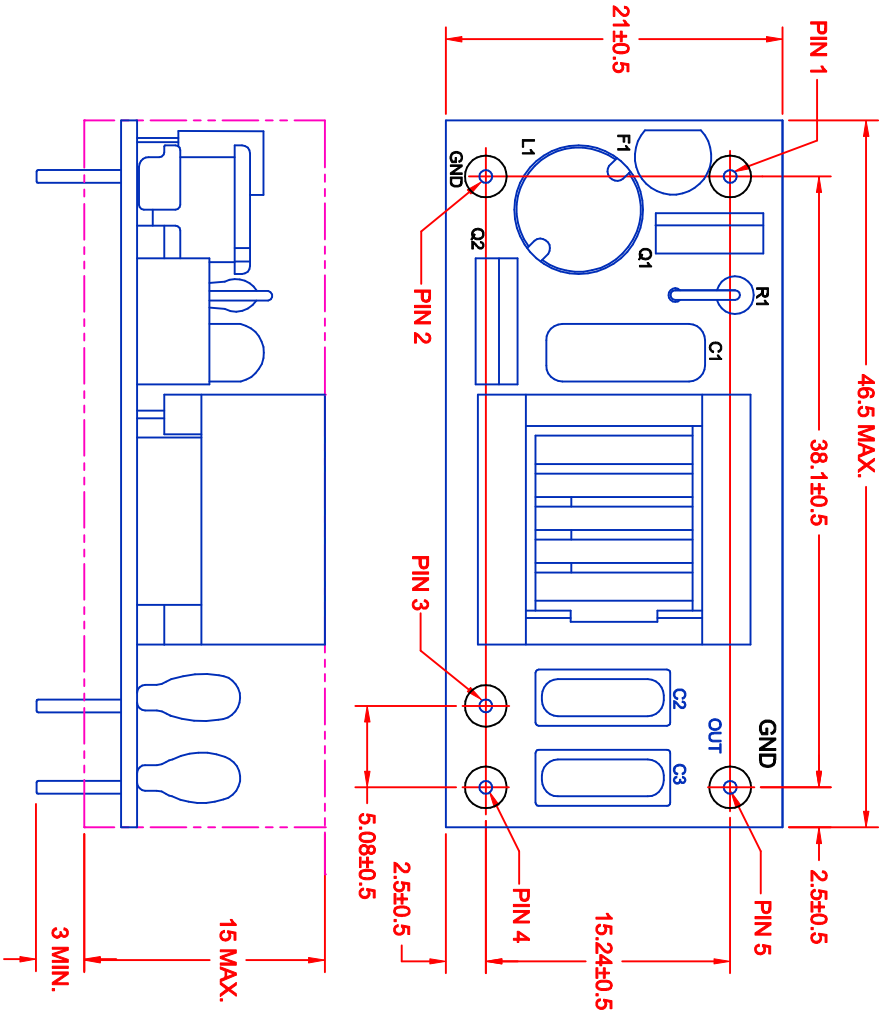

CAUTION:
REVERSE POLARITY TO INVERTER
INPUT WILL CAUSE AN OPEN CIRCUIT
IN FUSE F1.

BOARD PIN #	INPUT
1	+V (V In)
2	V (GND)
3	OUT 1
4	OUT 2
5	OUT (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	21.6	24.0	26.4
INPUT CURRENT: (mA)	80	140	200
OUTPUT VOLTAGE: (Vrms)	900	1000	1100
OUTPUT CURRENT (mA) x 2	4.5	5.5	6.5
OUTPUT FREQUENCY: (KHz)	20	30	45
OPERATING TEMP: (CELSIUS)	0	25	50

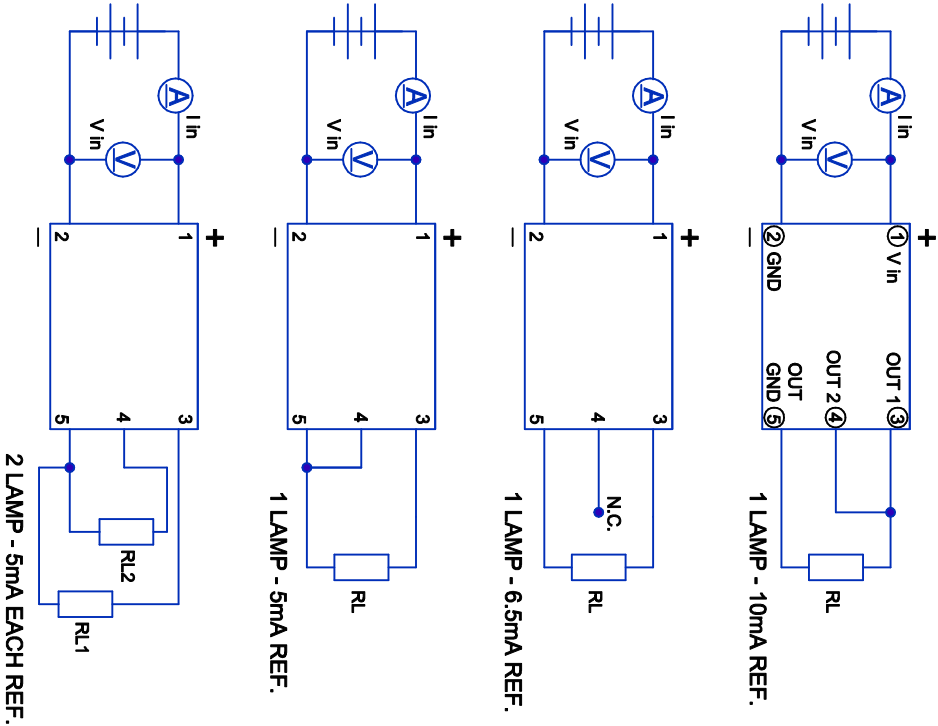

METRIC	DIMENSIONS ARE IN MILLIMETERS	TOLERANCE UNLESS OTHERWISE SPECIFIED
THIRD ANGLE PROJECTION	1 PL +/- 0.3	2 PL +/- 0.3
DRAWN BY L. WENGSTROM	APPROVED BY F.D.	DATE 3/10/03
- CAD DRAWING -	MANUAL REVISIONS NOT PERMITTED	
TITLE		
24 V CCFL POWER SUPPLY		
SIZE A	FSCH NO. 55335	DRAWING NO. BXA-24529
SCALE NONE	RELEASED DATE 3/10/03	REVISION DATE
		REV. NO.
		SHEET OF

JKL COMPONENTS CORPORATION

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com