

SC702 Stereo A/V Direct Box

Audio Specifications

Switchcraft®

Parameter	SC702CT	SC702	Conditions
Frequency Response	20Hz - 20kHz	10Hz - 40kHz	+/-0.3dB, ref 1kHz
Total Harmonic Distortion + Noise	< 0.007% < 0.4%	< 0.002% <0.06%	at 1kHz, +4dBu Input, 22kHz Bandwidth at 20Hz, +4dBu Input, 22kHz Bandwidth
Maximum Input Level	+18dBu	+20dBu	at 20Hz with 1% THD+Noise
Input Impedance	> 120k Ω	> 140k Ω	at 1kHz
Output Impedance	< 50 Ω	< 150 Ω	at 1kHz
Common Mode Rejection Ratio (CMRR)	> 105dB	>95dB	at 60Hz
Deviation from Linear Phase	< 6° < 1° < 11°	< 3° < 1° < 17°	at 20Hz at 1kHz at 20kHz
Voltage Gain	-23dB -43dB	-23dB -43dB	+/-1dB +/-1dB with 20dB pad engaged
Pad Attenuation	20dB	20dB	+/-1dB

Notes: All measurements were taken with a 25 Ω unbalanced source and measured from the XLR with a 1k Ω balanced load.
Specifications subject to change without notice.


PRELIMINARY

CUSTOMER DRAWING

SCALE 1:1	Switchcraft®		
DATE DRAWN 11-15-11			
DRAWN BY BHM	PART No. SC702 Series	SHEET 2 OF 3	REV 01

SolidWorks CAD File

SCHEMATIC

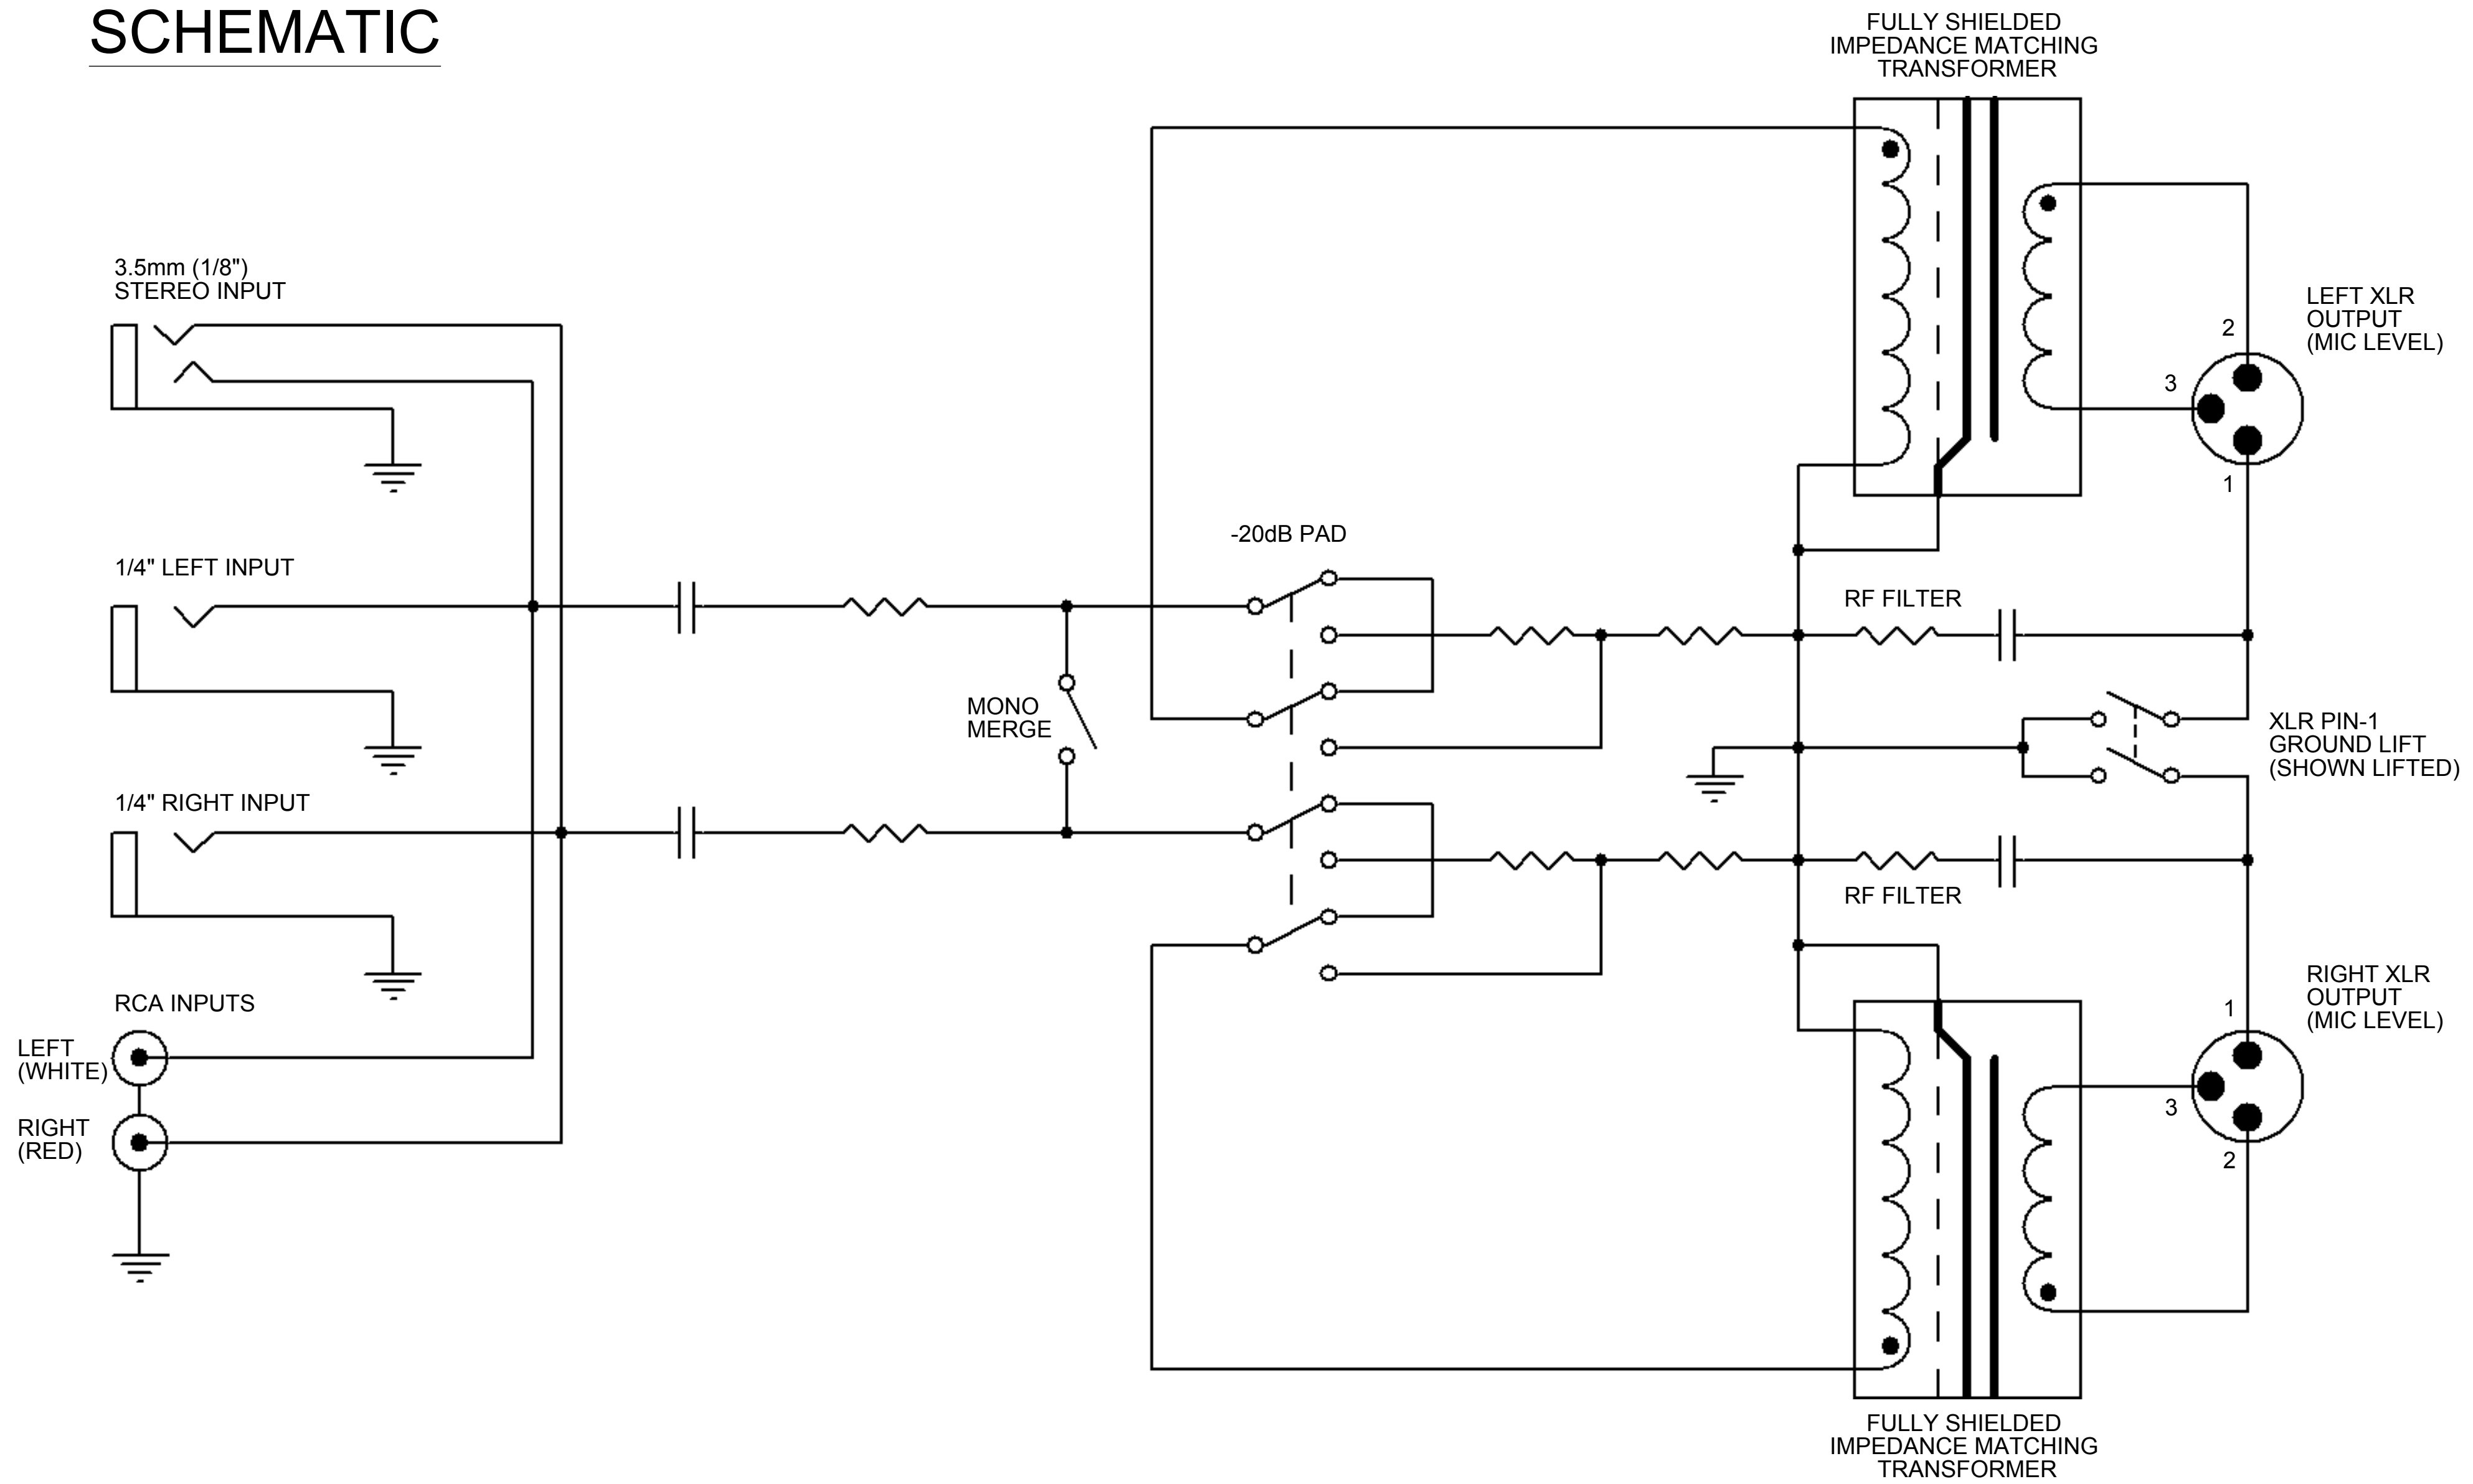

PRELIMINARY

CUSTOMER DRAWING

SCALE 1:1	Switchcraft®	
DATE DRAWN 11-15-11		
DRAWN BY BHM	PART No. SC702 Series	REV 01

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com