


49 PCB Mount Enclosed Relay/SPDT 3 - 10 Amp Rated

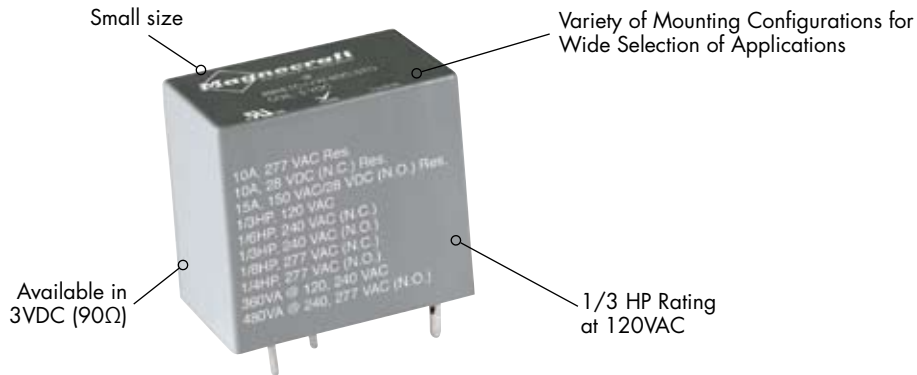

General Specifications

(UL 508)


10 Amp STO

Contact Characteristics		Units	SPDT	
Number and type of Contacts			Normally Open	Normally Closed
Contact materials			Silver Alloy	
Current rating		A	15	10
Switching voltage		V	277 V 50/60 Hz	
		V	28 V	
		HP	1/3 @ 240 VAC	1/6 @ 240 VAC
		HP	1/4 @ 277 VAC	1/8 @ 277 VAC
Minimum Switching Requirement		Pilot Duty mA	B300 (120/240 VAC)	
			100	
Coil Characteristics				
Voltage Range		V	3...24	
Operating Range % of Nominal			75% to 110%	
Average consumption		W	0.11	
Drop-out voltage threshold			10%	
Performance Characteristics				
Electrical Life Operations @ Rated Current (Resistive)			100,000	
Mechanical Life Unpowered			10,000,000	
Operating time (response time)		ms	25	
Dielectric Between coil and contact		V	1500	
Between contacts		V	500	
Environment				
Product certifications Standard version			UL	
Ambient air temperature around the device Storage		°C	-40...+85	
Operation		°C	-40...+55	
Vibration resistance Operational		g-n	3, 10 to 55 Hz	
Shock resistance		g-n	10	
Weight		grams	42	



5 Amp STO SPDT		3 Amp SIL SPDT	
Normally Open	Normally Closed	Normally Open	Normally Closed
Silver Alloy		Fine Silver	
5		15	3
120 V 50/60 Hz		150 V 50/60 Hz	
28 V		28 V	
1/3 @ 240 VAC	1/6 @ 240 VAC	1/3 @ 240 VAC	1/6 @ 240 VAC
1/4 @ 277 VAC	1/8 @ 277 VAC	1/4 @ 277 VAC	1/8 @ 277 VAC
B300 (120/240 VAC)		B300 (120/240 VAC)	
100		100	
3....24		3....24	5....24
75% to 110%		75% to 110%	
0.11		0.11	
10%		10%	
100,000		100,000	
10,000,000		10,000,000	
25		25	
2500		2500	
500		500	
UL		UL	
-40...+85		-40...+85	
-40...+55		-40...+55	
3, 10 to 55 Hz		3, 10 to 55 Hz	
10		10	
42		42	

49 PCB Mount Enclosed Relay/SPDT 3 - 10 Amp Rated *continued*

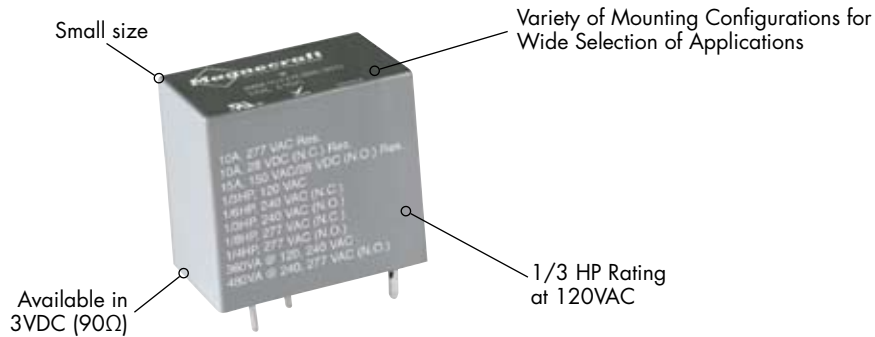

Standard Part Numbers



BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Nominal Input Voltage 3 Amp, Style RE1C1	Nominal Coil Resistance (Ω)	Part Number	Contact Configuration
3 VDC	90 Ω	W49RE1C1VG-3DC-SIL	SPDT
5 VDC	235 Ω	W49RE1C1VG-5DC-SIL	SPDT
12 VDC	1350 Ω	W49RE1C1VG-12DC-SIL	SPDT
6 VDC	410 Ω	W49RE1C2VF-6DC-SIL	SPDT
12 VDC	1640 Ω	W49RE1C2VF-12DC-SIL	SPDT
24 VDC	6560 Ω	W49RE1C2VF-24DC-SIL	SPDT
5 Amp, Style RE1C1 and RE1C2			
5 VDC	235 Ω	W49RE1C1VG-5DC-STO	SPDT
12 VDC	1350 Ω	W49RE1C1VG-12DC-STO	SPDT
24 VDC	5400 Ω	W49RE1C1VG-24DC-STO	SPDT
6 VDC	410 Ω	W49RE1C2VF-6DC-STO	SPDT
12 VDC	1640 Ω	W49RE1C2VF-12DC-STO	SPDT
24 VDC	6560 Ω	W49RE1C2VF-24DC-STO	SPDT
10 Amp, Style RE1C1			
5 VDC	100 Ω	W49RE1C1VW-5DC-STO	SPDT
12 VDC	600 Ω	W49RE1C1VW-12DC-STO	SPDT
24 VDC	2400 Ω	W49RE1C1VW-24DC-STO	SPDT
10 Amp, Style R1C4			
5 VDC	235 Ω	W49R1C4VG-5DC-STO	SPDT
12 VDC	1350 Ω	W49R1C4VG-12DC-STO	SPDT
10 Amp, Style R1C4			
5 VDC	100 Ω	W49R1C4VW-5DC-STO	SPDT
24 VDC	2400 Ω	W49R1C4VW-24DC-STO	SPDT

Part Number Builder


Series	Footprint	Rating	Coil Voltage	Contact Material
49	RE1C1 = Narrow Footprint	VG = (RE1C1) 5A STO or 3A SIL	3DC = 3 VDC	SIL = Fine Silver Contacts
	RE1C2 = Wide Footprint	VG (R1C4) = 10A STO	5DC = 5 VDC	STO = Silver Alloy Contacts
	R1C4 = Top Mounting Bracket	VF = (RE1C2) 5A STO or 3A SIL	6DC = 6 VDC	
		VW = 10A STO	12DC = 12 VDC	
			24DC = 24 VDC	

CIRCUIT BOARD PIN SPACING VIEWED FROM COMPONENT SIDE (TOP VIEW)

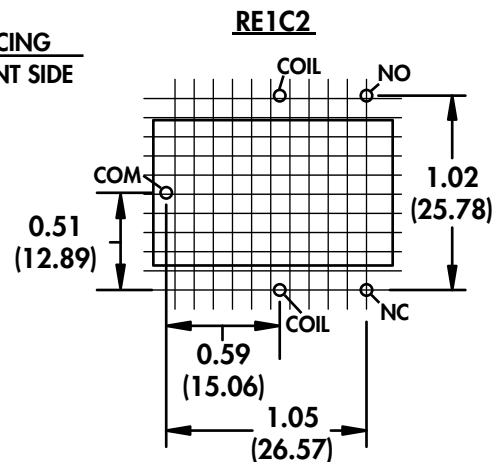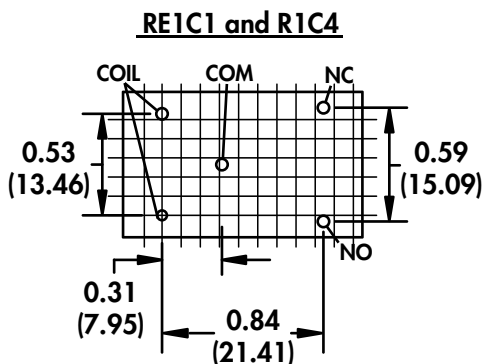


PIN SPACINGS SHOWN AT 100% OF ACTUAL SIZE



STYLE RE1C1

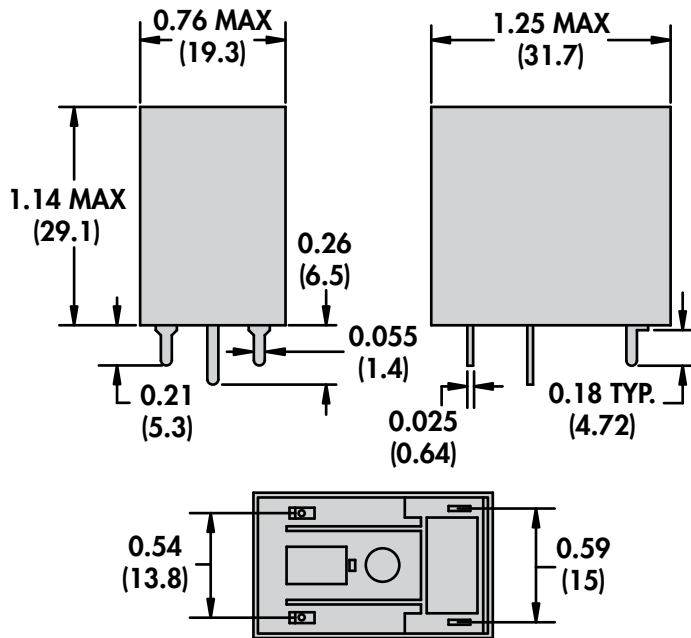


STYLE RE1C2

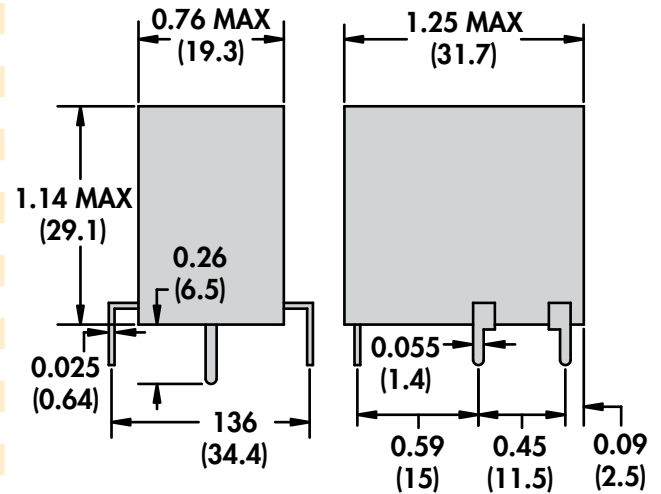

STYLE R1C4

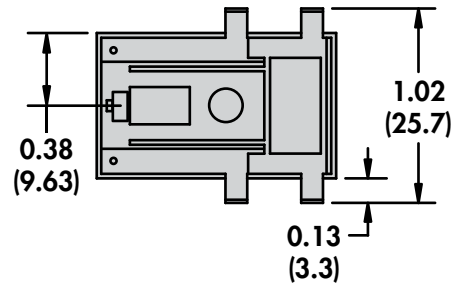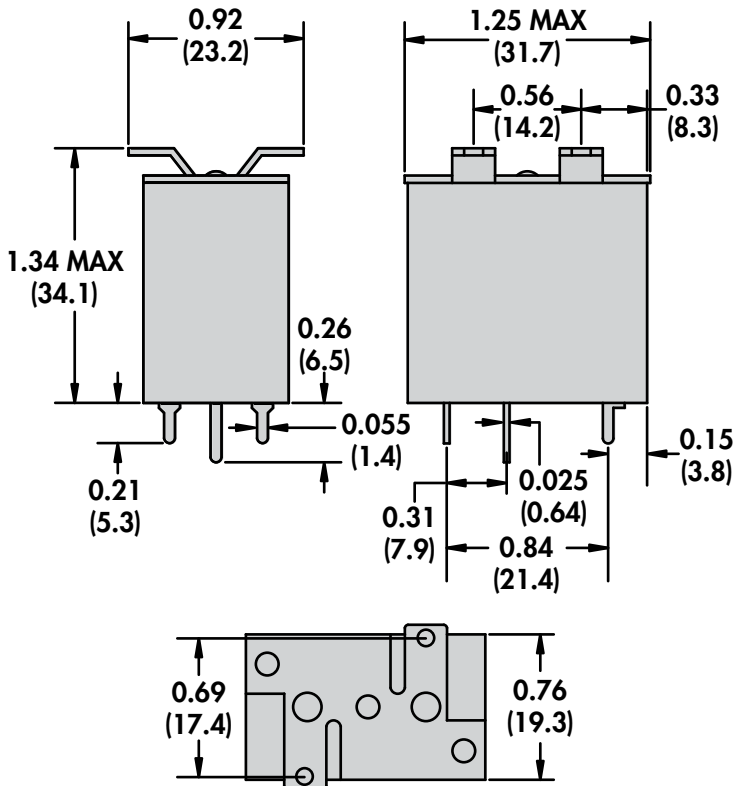

WIRING DIAGRAMS
TOP VIEW

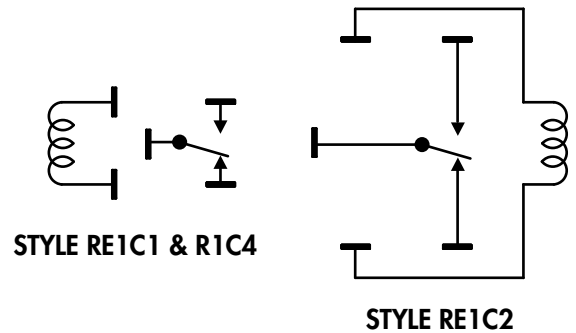

DRAWINGS SHOWN AT 100% OF ACTUAL SIZE

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com