

### FP10-250

#### Electrical Specifications (@25C)

1. Maximum Power: 2.5 VA
2. Primary Voltage:  
Series: 230V@50/60 Hz  
Parallel: 115V@50/60Hz
3. Secondary:  
Series: 10.0VCT @ 0.25 Amps  
Parallel: 5.0V @ 0.5 Amps

#### Description:

The FP10-250 is part of a series which has a long history of reliable service in the field, made from a proven design and constructed with UL recognized materials.

#### Construction:

Wound on two dual channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

#### Safety:

These products are 100% hipot tested with an insulation of 2000V between primary and secondary windings and 1500V between the primary / secondary windings and the core.

#### Agency File:

UL: File E53148, UL 506, Class B General Purpose Transformer,  
cUL: File E53148, UL 506, Class B General Purpose Transformer, Canadian Use



#### Dimensions:


| A     | B     | C     | D     | E     | F     |
|-------|-------|-------|-------|-------|-------|
| 1.875 | 1.562 | 0.650 | 0.267 | 0.375 | 1.600 |

Units: In inches

Weight: 5.0 oz



Pin Dimension: .020 x .041 in

#### Schematic:



**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

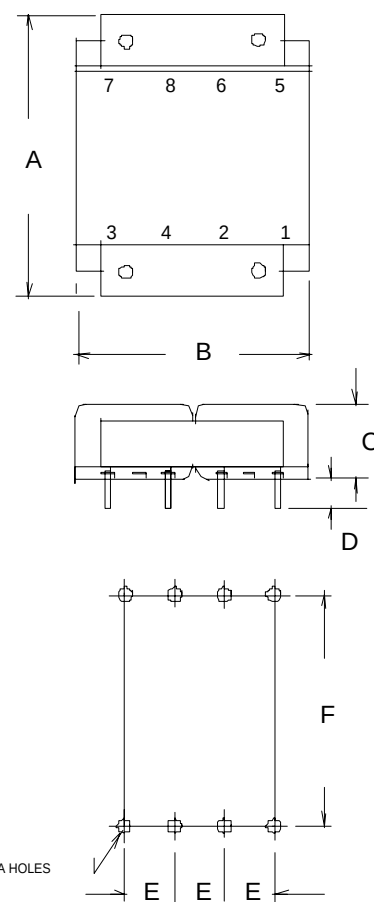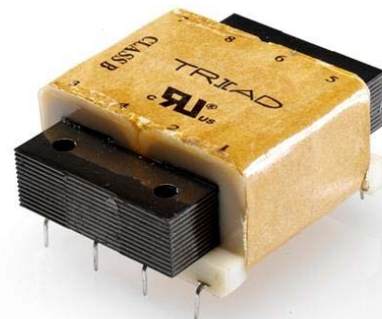

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)