






W2G 110
Brushless DC
 4-¹¹/₁₆" x 1-¹/₂"
 (119mm x 38mm)

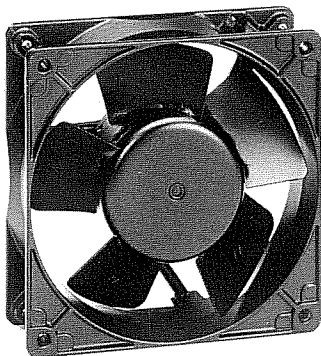

Dimensions

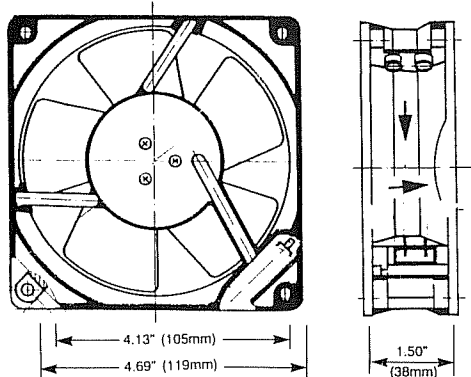

Air Performance

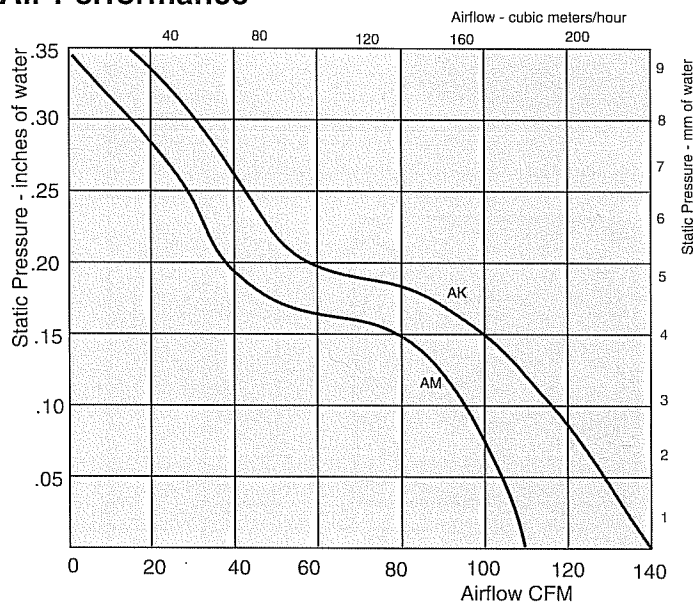

Ball Bearing Max. Temp. 72°C	DC Volts	Watts	CFM	dBA	PSIL dB	Features	Approvals		
							UL	CSA	VDE
W2G110-AK67-31	12	15	140	61	56	Terminals			
W2G110-AK43-31	24	15	140	61	56	Terminals			
W2G110-AM39-31	12	5.3	110	54	49	Terminals	✓	✓	✓
W2G110-AM39-01	12	5.3	110	54	49	10.5" AWG 22 Leads	✓	✓	✓
W2G110-AM39-92	12	5.3	110	54	49	Hall Effect, Leads	✓	✓	✓
W2G110-AM47-31	24	5.6	110	54	49	Terminals	✓	✓	✓
W2G110-AM47-01	24	5.6	110	54	49	10.5" AWG 22 Leads	✓	✓	✓
W2G110-AM47-92	24	5.6	110	54	49	Hall Effect, Leads	✓	✓	✓
W2G110-AM41-31	48	5.9	110	54	49	Terminals	✓	✓	✓
W2G110-AM41-01	48	5.9	110	54	49	10.5" AWG 22 Leads	✓	✓	✓
W2G110-AM41-92	48	5.9	110	54	49	Hall Effect, Leads	✓	✓	✓

UL yellow card E54522, CSA file LR43145, VDE file 1375

Construction, Mounting & Connection

Mounting: From either face using four .150" (3.8mm) holes.
Weight: 1.15 lbs. (.52kg)
Air Flow: Struts on inlet.
Housing: Aluminum.

Connection: Two polarized spade terminals .110" (2.8mm) wide, .020" (.51mm) thick and .33" (8.5mm) long on .295" (7.5mm) centers.
 Lead wires color coded: Red (+), blue (-).
Option: Opposite air flow direction.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com