
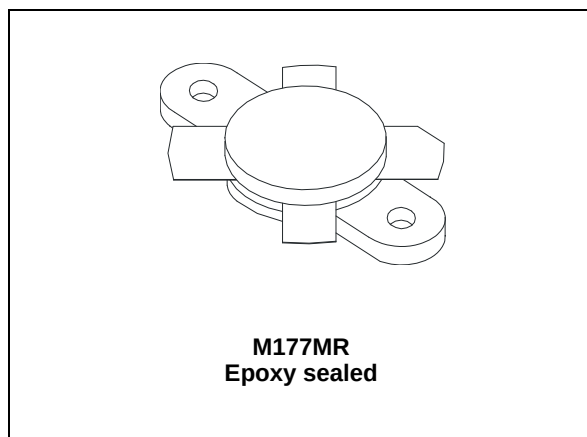


## 50 V moisture resistant DMOS transistor for ISM applications

Datasheet - preliminary data



**Figure 1. Pin connection**

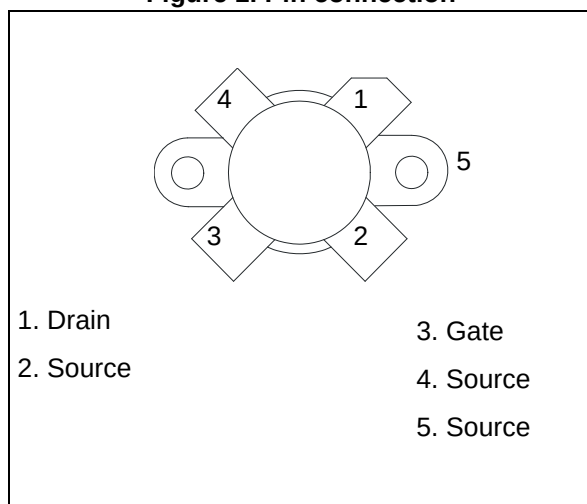

### Features

- Improved ruggedness  $V_{(BR)DSS} > 200 \text{ V}$
- Excellent thermal stability
- 20:1 all phases load mismatch capability
- $P_{OUT} = 300 \text{ W min.}$  with 24 dB gain @ 30 MHz
- In compliance with the 2002/95/EEC European directive
- Moisture resistant package specifically designed to operate under extreme environments

### Description

The SD4933MR is an N-channel MOS field-effect RF power transistor. It is intended for use in 50 V ISM applications up to 100 MHz.

The SD4933MR benefits from the latest generation of environmentally designed packaging, ruggedized against cyclic high moisture operating and severe storage conditions.

**Table 1. Device summary**

| Order code | Marking                 | Base qty. | Package | Packaging    |
|------------|-------------------------|-----------|---------|--------------|
| SD4933MR   | SD4933MR <sup>(1)</sup> | 25 pcs    | M177MR  | Plastic tray |

1. For more details please refer to [Chapter 8: Marking, packing and shipping specifications](#).

## Contents

|           |                                                     |           |
|-----------|-----------------------------------------------------|-----------|
| <b>1</b>  | <b>Electrical data</b>                              | <b>3</b>  |
| 1.1       | Maximum ratings                                     | 3         |
| 1.2       | Thermal data                                        | 3         |
| <b>2</b>  | <b>Electrical characteristics</b>                   | <b>4</b>  |
| 2.1       | Static                                              | 4         |
| 2.2       | Dynamic                                             | 4         |
| <b>3</b>  | <b>Impedance data</b>                               | <b>5</b>  |
| <b>4</b>  | <b>Typical performance</b>                          | <b>6</b>  |
| <b>5</b>  | <b>Typical performance (30 MHz)</b>                 | <b>9</b>  |
| 5.1       | Test circuit (30 MHz)                               | 10        |
| <b>6</b>  | <b>Circuit layout</b>                               | <b>12</b> |
| <b>7</b>  | <b><math>V_{GS}/G_{FS}</math> sorts</b>             | <b>13</b> |
| <b>8</b>  | <b>Marking, packing and shipping specifications</b> | <b>16</b> |
| <b>9</b>  | <b>Package mechanical data</b>                      | <b>17</b> |
| <b>10</b> | <b>Revision history</b>                             | <b>19</b> |

# 1 Electrical data

## 1.1 Maximum ratings

( $T_{CASE} = 25\text{ °C}$ )

Table 2. Absolute maximum ratings

| Symbol        | Parameter                                                                             | Value       | Unit |
|---------------|---------------------------------------------------------------------------------------|-------------|------|
| $V_{(BR)DSS}$ | Drain source voltage                                                                  | 200         | V    |
| $V_{DGR}$     | Drain-gate voltage ( $R_{GS} = 1\text{ M}\Omega$ )                                    | 200         | V    |
| $V_{GS}$      | Gate-source voltage                                                                   | $\pm 20$    | V    |
| $I_D$         | Drain current                                                                         | 40          | A    |
| $P_{DISS}$    | Power dissipation                                                                     | 648         | W    |
| $E_{AS}$      | Avalanche energy<br>Single pulse ( $I_D = 56\text{ A} - 800\text{ }\mu\text{H}$ coil) | 1200        | mJ   |
| $T_J$         | Max. operating junction temperature                                                   | 200         | °C   |
| $T_{STG}$     | Storage temperature                                                                   | -65 to +150 | °C   |

## 1.2 Thermal data

Table 3. Thermal data

| Symbol     | Parameter                          | Value | Unit |
|------------|------------------------------------|-------|------|
| $R_{thJC}$ | Junction - case thermal resistance | 0.27  | °C/W |

## 2 Electrical characteristics

( $T_{\text{CASE}} = 25\text{ }^{\circ}\text{C}$ )

### 2.1 Static

Table 4. Static

| Symbol                      | Test conditions                |                                 | Min | Typ  | Max | Unit          |
|-----------------------------|--------------------------------|---------------------------------|-----|------|-----|---------------|
| $V_{(\text{BR})\text{DSS}}$ | $V_{\text{GS}} = 0\text{ V}$   | $I_{\text{DS}} = 100\text{ mA}$ | 200 | 240  |     | V             |
| $I_{\text{DSS}}$            | $V_{\text{GS}} = 0\text{ V}$   | $V_{\text{DS}} = 100\text{ V}$  |     |      | 2   | mA            |
| $I_{\text{GSS}}$            | $V_{\text{GS}} = 20\text{ V}$  | $V_{\text{DS}} = 0\text{ V}$    |     |      | 1   | $\mu\text{A}$ |
| $V_{\text{TH}}$             | $I_{\text{D}} = 250\text{ mA}$ |                                 | 1.5 | 2.5  | 4.0 | V             |
| $V_{\text{DS(ON)}}$         | $V_{\text{GS}} = 10\text{ V}$  | $I_{\text{D}} = 20\text{ A}$    |     | 3.5  | 4.0 | V             |
| $G_{\text{FS}}$             | $V_{\text{DS}} = 10\text{ V}$  | $I_{\text{D}} = 5\text{ A}$     | 5   | 8    |     | S             |
| $C_{\text{ISS}}$            | $V_{\text{GS}} = 0\text{ V}$   | $V_{\text{DS}} = 50\text{ V}$   |     | 1000 |     | pF            |
| $C_{\text{OSS}}$            | $V_{\text{GS}} = 0\text{ V}$   | $V_{\text{DS}} = 50\text{ V}$   |     | 400  |     | pF            |
| $C_{\text{RSS}}$            | $V_{\text{GS}} = 0\text{ V}$   | $V_{\text{DS}} = 50\text{ V}$   |     | 16   |     | pF            |

### 2.2 Dynamic

Table 5. Dynamic

| Symbol           | Test conditions               |                                                                                                         | Min  | Typ  | Max | Unit |
|------------------|-------------------------------|---------------------------------------------------------------------------------------------------------|------|------|-----|------|
| $P_{\text{OUT}}$ | $V_{\text{DD}} = 50\text{ V}$ | $I_{\text{DQ}} = 250\text{ mA}$ $f = 30\text{ MHz}$                                                     | 300  |      | -   | W    |
| $G_{\text{PS}}$  | $V_{\text{DD}} = 50\text{ V}$ | $I_{\text{DQ}} = 250\text{ mA}$ $P_{\text{OUT}} = 300\text{ W}$ $f = 30\text{ MHz}$                     | 20   | 24   | -   | dB   |
| $h_{\text{D}}$   | $V_{\text{DD}} = 50\text{ V}$ | $I_{\text{DQ}} = 250\text{ mA}$ $P_{\text{OUT}} = 300\text{ W}$ $f = 30\text{ MHz}$                     | 50   | 58   | -   | %    |
| Load mismatch    | $V_{\text{DD}} = 50\text{ V}$ | $I_{\text{DQ}} = 250\text{ mA}$ $P_{\text{OUT}} = 300\text{ W}$ $f = 30\text{ MHz}$<br>All phase angles | 10:1 | 20:1 | -   | VSWR |

3 Impedance data

Figure 2. Impedance data

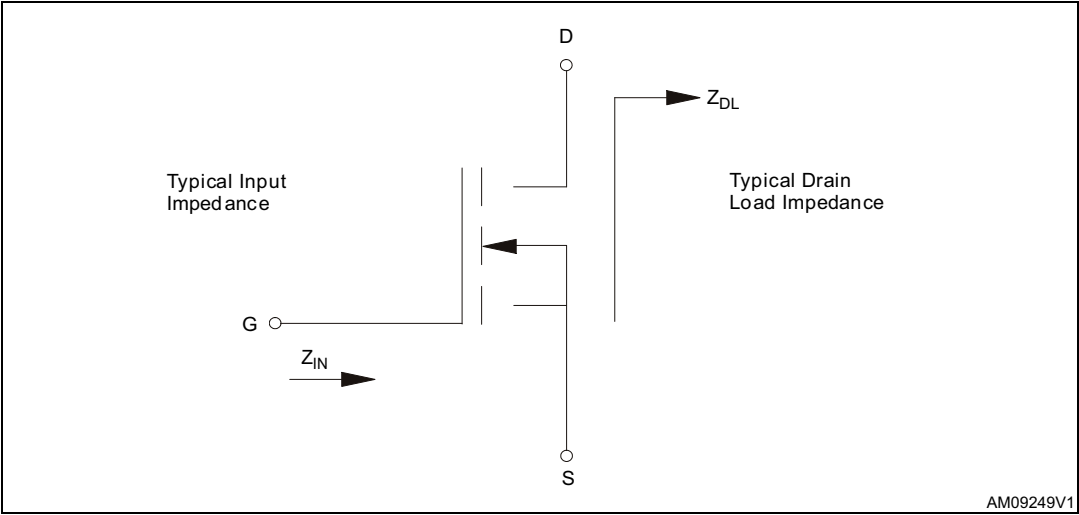


Table 6. Impedance values

| $Z_{in}$    | $Z_{dl}$    |
|-------------|-------------|
| 1.6 - j 5.0 | 3.3 + j 1.0 |

# 4 Typical performance

Figure 3. Capacitance vs. drain voltage

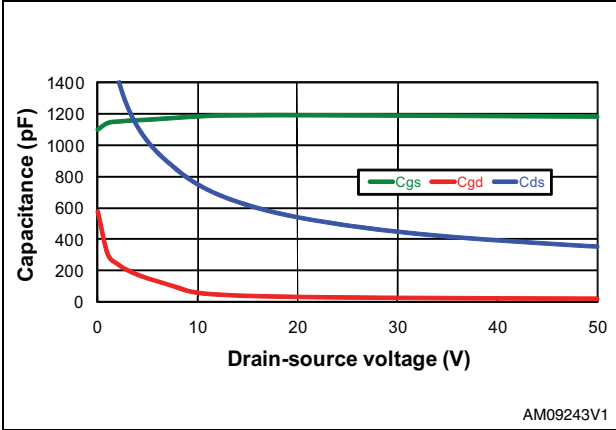


Figure 4. Drain current vs. drain-source voltage

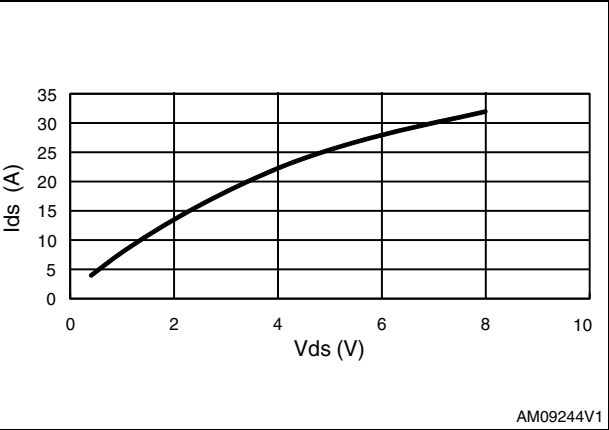


Figure 5. Drain current vs. drain-source voltage at different temperatures

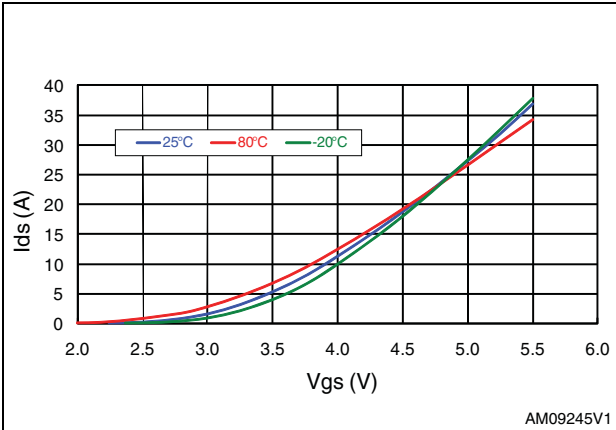


Figure 6. Transient thermal impedance


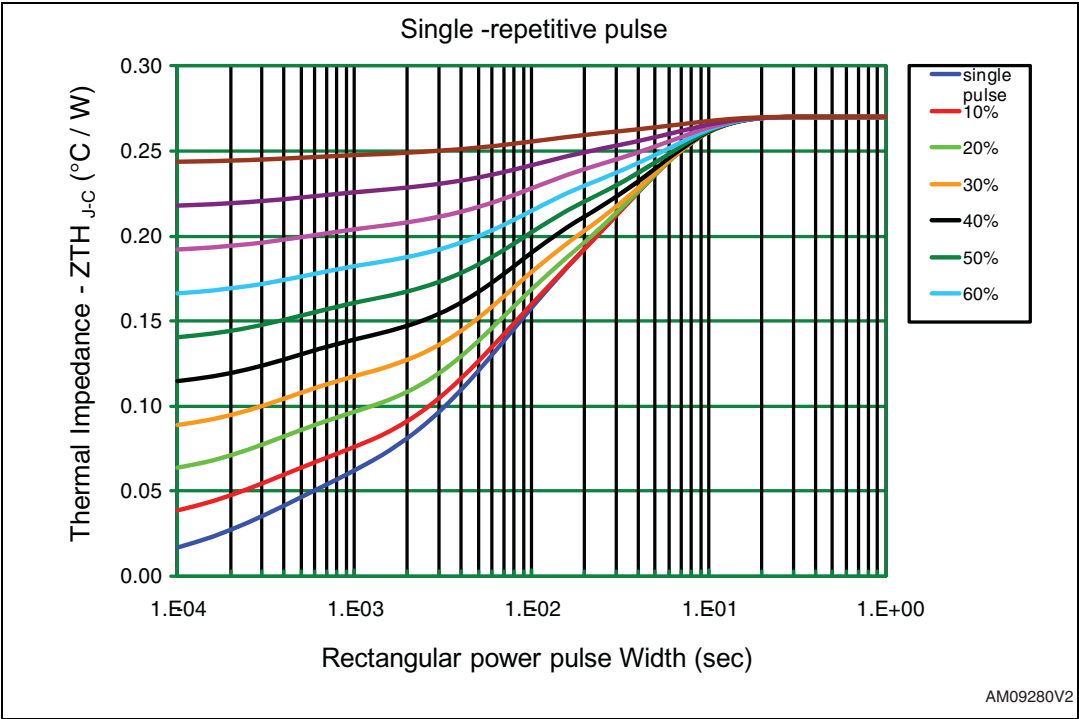


Figure 7. Transient thermal impedance model



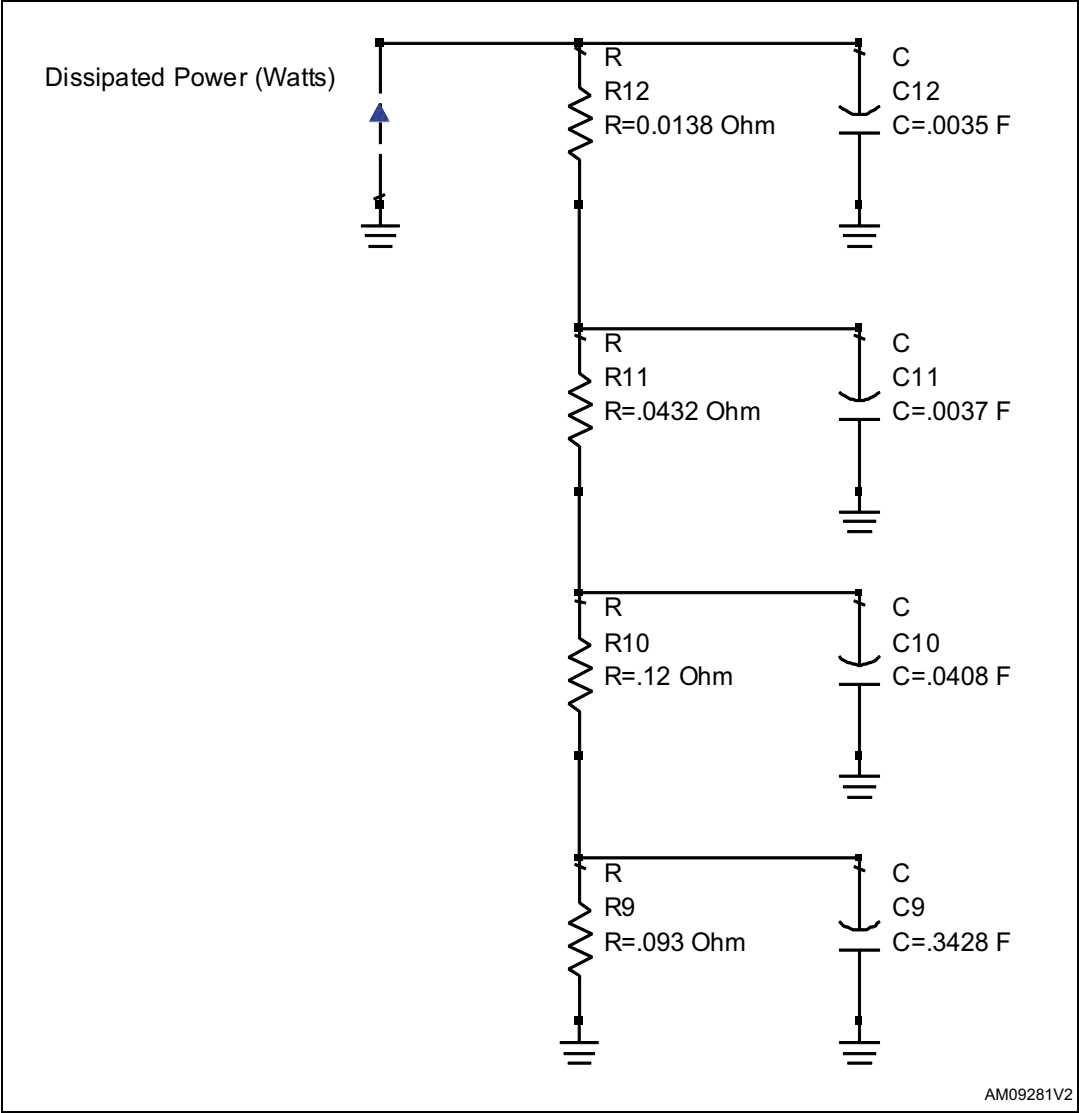

5 Typical performance (30 MHz)

Figure 8. Gain and efficiency vs. output power at Vdd = 50 V, Idq = 250 mA, freq = 30 MHz

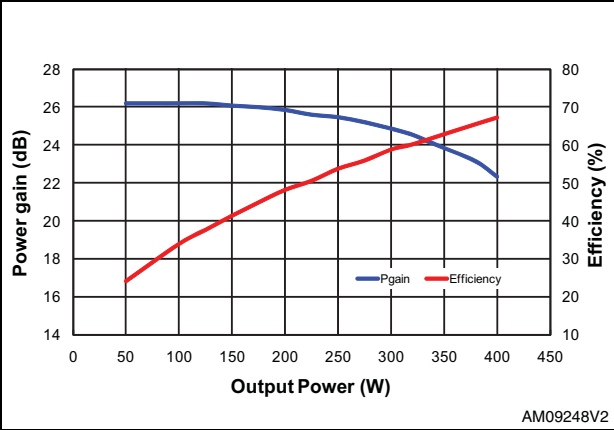


Figure 9. Output power vs. input power

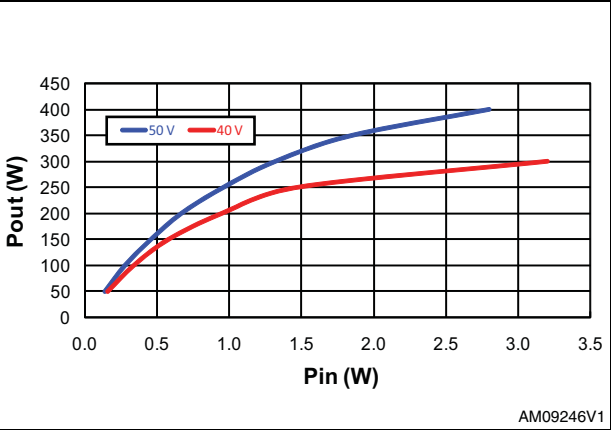


Figure 10. Output power vs. supply voltage


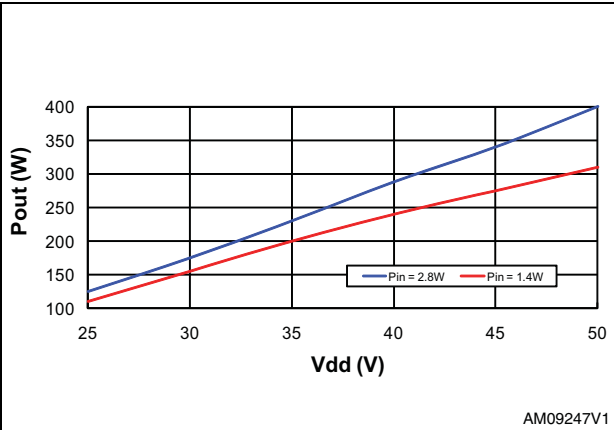


Figure 11. Output power vs. gate voltage

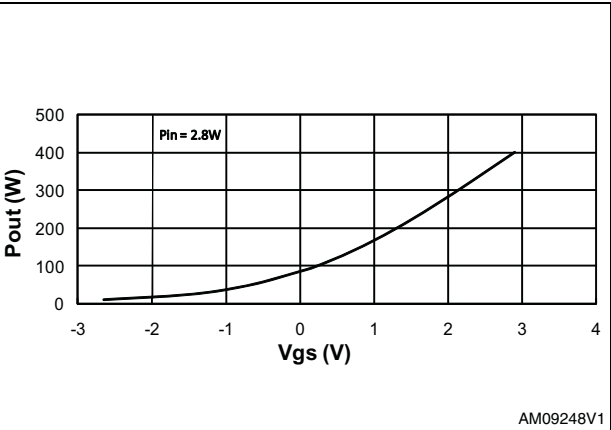

5.1 Test circuit (30 MHz)

Figure 12. 30 MHz test circuit schematic

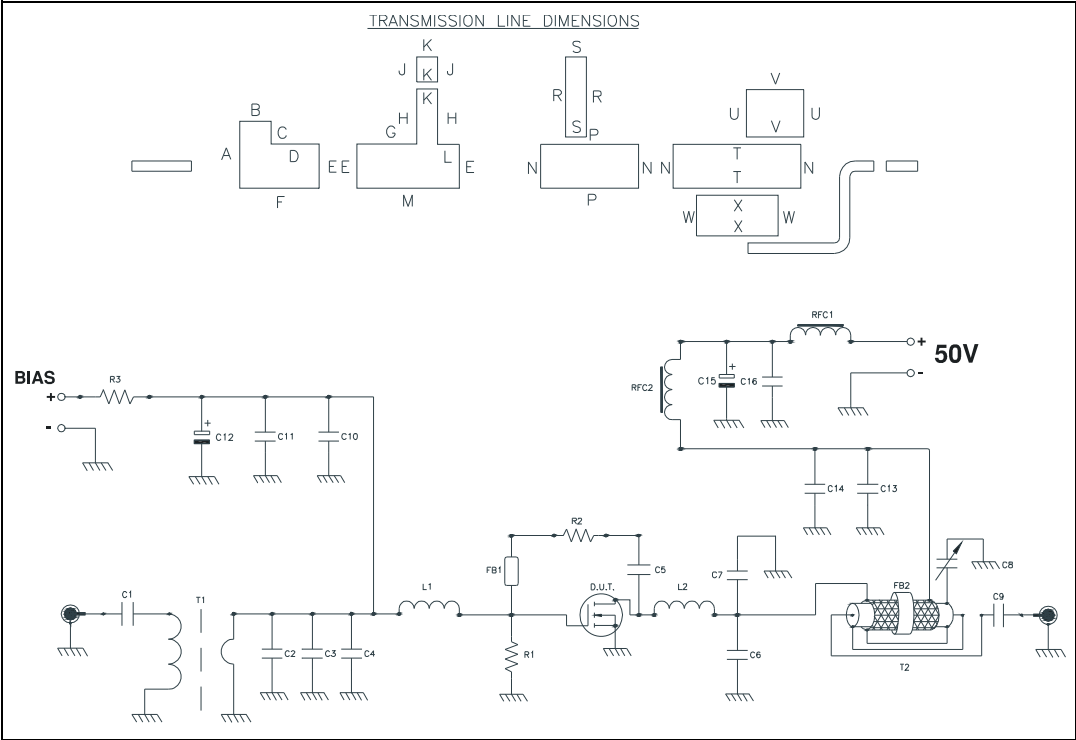


Table 7. Transmission line dimensions

| Dim. | Inch  | mm    |
|------|-------|-------|
| A    | 0.532 | 13.51 |
| B    | 0.250 | 6.35  |
| C    | 0.181 | 4.59  |
| D    | 0.383 | 9.37  |
| E    | 0.351 | 8.91  |
| F    | 0.633 | 16.08 |
| G    | 0.477 | 12.12 |
| H    | 0.438 | 11.12 |
| J    | 0.200 | 5.08  |
| K    | 0.164 | 4.16  |
| L    | 0.174 | 4.42  |
| M    | 0.817 | 20.75 |
| N    | 0.350 | 8.89  |
| P    | 0.779 | 19.79 |
| R    | 0.639 | 16.23 |

Table 7. Transmission line dimensions (continued)

| Dim. | Inch  | mm    |
|------|-------|-------|
| S    | 0.165 | 4.19  |
| T    | 1.017 | 25.84 |
| U    | 0.375 | 9.52  |
| V    | 0.456 | 11.58 |
| W    | 0.325 | 8.24  |
| X    | 0.650 | 16.50 |

Table 8. 30 MHz test circuit component list

| Component          | Description                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| C1,C9              | 0.01 $\mu$ F / 500 V surface mount ceramic chip capacitor                                                                               |
| C2, C3             | 750 pF ATC 700B surface mount ceramic chip capacitor                                                                                    |
| C4                 | 300 pF ATC 700B surface mount ceramic chip capacitor                                                                                    |
| C5,C10,C11,C14,C16 | 10000 pF ATC 200B surface mount ceramic chip capacitor                                                                                  |
| C6                 | 510 pF ATC 700B surface mount ceramic chip capacitor                                                                                    |
| C7                 | 300 pF ATC 700B surface mount ceramic chip capacitor                                                                                    |
| C8                 | 175-680 pF type 46 standard trimmer capacitor                                                                                           |
| C12                | 47 $\mu$ F / 63 V aluminum electrolytic radial lead capacitor                                                                           |
| C13                | 1200 pF ATC 700B surface mount ceramic chip capacitor                                                                                   |
| C15                | 100 $\mu$ F / 63 V aluminum electrolytic radial lead capacitor                                                                          |
| R1,R3              | 1 K OHM 1 W surface mount chip resistor                                                                                                 |
| R2                 | 560 OHM 2 W wire-wound axils lead resistor                                                                                              |
| T1                 | HF 2-30 MHz surface mount 9:1 transformer                                                                                               |
| T2                 | RG - 142B/U 50 OHM coaxial cable OD = 0.165[4.18] L 15"[381.00] covered with 15"[381.00] tinned copper tubular brand 13/65" [5.1] width |
| L1                 | 1 3/4 turn air-wound 16 AWG ID = 0.219 [5.56] poly-coated magnet wire                                                                   |
| L2                 | 1 3/4 turn air-wound 12 AWG ID = 0.250 [6.34] bus bar wire                                                                              |
| RFC1,RFC2          | 3 turns 14 AWG wire through ferrite toroid                                                                                              |
| FB1                | Surface mount EMI shield bead                                                                                                           |
| FB2                | Toroid                                                                                                                                  |
| PCB                | ULTRALAM 2000. 0.030" THK, $\epsilon_r = 2.55$ , 2 Oz ED CU both sides                                                                  |

## 6 Circuit layout

Figure 13. Test fixture component layout


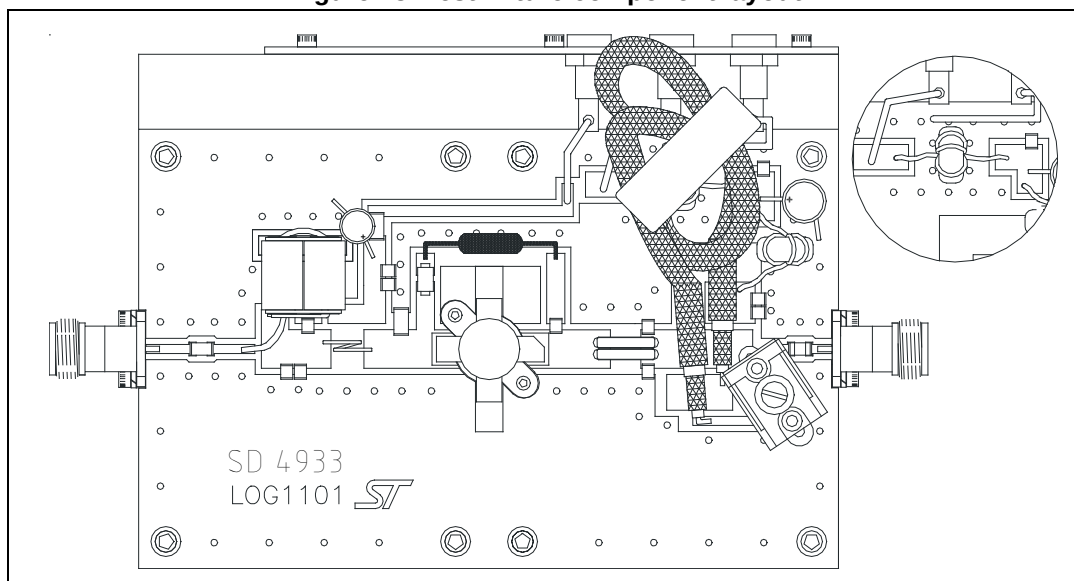


Figure 14. Test circuit photomasters

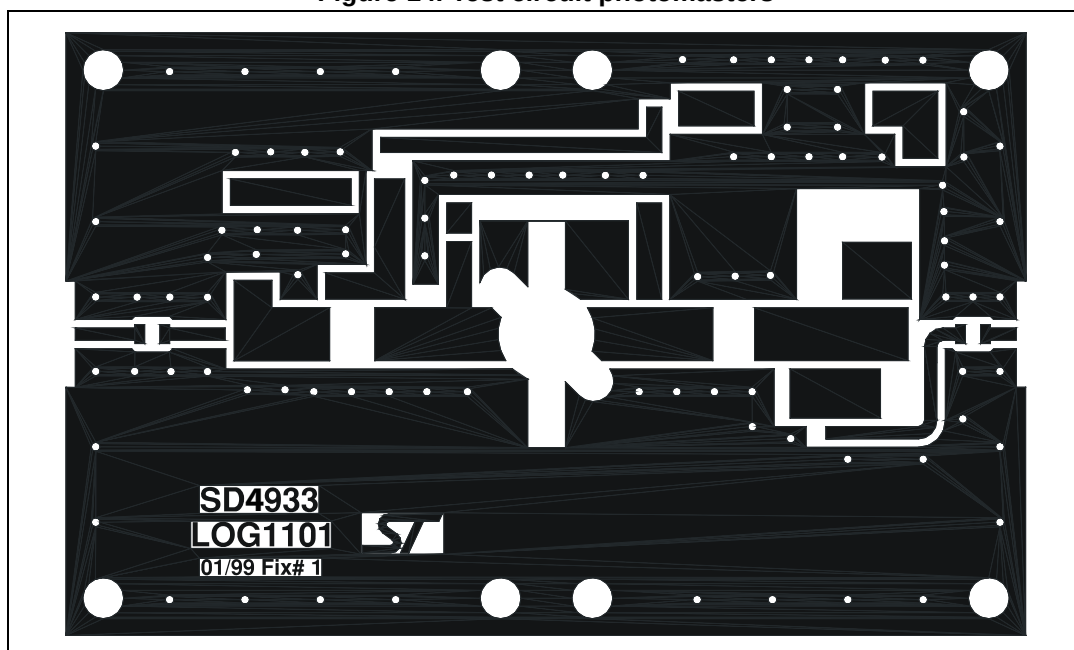

## 7 V<sub>GS</sub>/G<sub>FS</sub> sorts

Table 9. V<sub>GS</sub>/G<sub>FS</sub> sorts

| Marking | V <sub>GS</sub> (min) | V <sub>GS</sub> (max) | G <sub>FS</sub> (min) | G <sub>FS</sub> (max) |
|---------|-----------------------|-----------------------|-----------------------|-----------------------|
| A1      | 1.50                  | 1.75                  | 5                     | 6                     |
| A2      | 1.50                  | 1.75                  | 6                     | 7                     |
| A3      | 1.50                  | 1.75                  | 7                     | 8                     |
| A4      | 1.50                  | 1.75                  | 8                     | 9                     |
| A5      | 1.50                  | 1.75                  | 9                     | 10                    |
| A6      | 1.50                  | 1.75                  | 10                    | 11                    |
| A7      | 1.50                  | 1.75                  | 11                    | 12                    |
| A8      | 1.50                  | 1.75                  | 12                    | 13                    |
| A9      | 1.50                  | 1.75                  | 13                    | 14                    |
| B1      | 1.75                  | 2.00                  | 5                     | 6                     |
| B2      | 1.75                  | 2.00                  | 6                     | 7                     |
| B3      | 1.75                  | 2.00                  | 7                     | 8                     |
| B4      | 1.75                  | 2.00                  | 8                     | 9                     |
| B5      | 1.75                  | 2.00                  | 9                     | 10                    |
| B6      | 1.75                  | 2.00                  | 10                    | 11                    |
| B7      | 1.75                  | 2.00                  | 11                    | 12                    |
| B8      | 1.75                  | 2.00                  | 12                    | 13                    |
| B9      | 1.75                  | 2.00                  | 13                    | 14                    |
| C1      | 2.00                  | 2.25                  | 5                     | 6                     |
| C2      | 2.00                  | 2.25                  | 6                     | 7                     |
| C3      | 2.00                  | 2.25                  | 7                     | 8                     |
| C4      | 2.00                  | 2.25                  | 8                     | 9                     |
| C5      | 2.00                  | 2.25                  | 9                     | 10                    |
| C6      | 2.00                  | 2.25                  | 10                    | 11                    |
| C7      | 2.00                  | 2.25                  | 11                    | 12                    |
| C8      | 2.00                  | 2.25                  | 12                    | 13                    |
| C9      | 2.00                  | 2.25                  | 13                    | 14                    |
| D1      | 2.25                  | 2.50                  | 5                     | 6                     |
| D2      | 2.25                  | 2.50                  | 6                     | 7                     |
| D3      | 2.25                  | 2.50                  | 7                     | 8                     |
| D4      | 2.25                  | 2.50                  | 8                     | 9                     |
| D5      | 2.25                  | 2.50                  | 9                     | 10                    |

Table 9.  $V_{GS}/G_{FS}$  sorts (continued)

| Marking | $V_{GS}(\text{min})$ | $V_{GS}(\text{max})$ | $G_{FS}(\text{min})$ | $G_{FS}(\text{max})$ |
|---------|----------------------|----------------------|----------------------|----------------------|
| D6      | 2.25                 | 2.50                 | 10                   | 11                   |
| D7      | 2.25                 | 2.50                 | 11                   | 12                   |
| D8      | 2.25                 | 2.50                 | 12                   | 13                   |
| D9      | 2.25                 | 2.50                 | 13                   | 14                   |
| E1      | 2.50                 | 2.75                 | 5                    | 6                    |
| E2      | 2.50                 | 2.75                 | 6                    | 7                    |
| E3      | 2.50                 | 2.75                 | 7                    | 8                    |
| E4      | 2.50                 | 2.75                 | 8                    | 9                    |
| E5      | 2.50                 | 2.75                 | 9                    | 10                   |
| E6      | 2.50                 | 2.75                 | 10                   | 11                   |
| E7      | 2.50                 | 2.75                 | 11                   | 12                   |
| E8      | 2.50                 | 2.75                 | 12                   | 13                   |
| E9      | 2.50                 | 2.75                 | 13                   | 14                   |
| F1      | 2.75                 | 3.00                 | 5                    | 6                    |
| F2      | 2.75                 | 3.00                 | 6                    | 7                    |
| F3      | 2.75                 | 3.00                 | 7                    | 8                    |
| F4      | 2.75                 | 3.00                 | 8                    | 9                    |
| F5      | 2.75                 | 3.00                 | 9                    | 10                   |
| F6      | 2.75                 | 3.00                 | 10                   | 11                   |
| F7      | 2.75                 | 3.00                 | 11                   | 12                   |
| F8      | 2.75                 | 3.00                 | 12                   | 13                   |
| F9      | 2.75                 | 3.00                 | 13                   | 14                   |
| G1      | 3.00                 | 3.25                 | 5                    | 6                    |
| G2      | 3.00                 | 3.25                 | 6                    | 7                    |
| G3      | 3.00                 | 3.25                 | 7                    | 8                    |
| G4      | 3.00                 | 3.25                 | 8                    | 9                    |
| G5      | 3.00                 | 3.25                 | 9                    | 10                   |
| G6      | 3.00                 | 3.25                 | 10                   | 11                   |
| G7      | 3.00                 | 3.25                 | 11                   | 12                   |
| G8      | 3.00                 | 3.25                 | 12                   | 13                   |
| G9      | 3.00                 | 3.25                 | 13                   | 14                   |
| H1      | 3.25                 | 3.50                 | 5                    | 6                    |
| H2      | 3.25                 | 3.50                 | 6                    | 7                    |
| H3      | 3.25                 | 3.50                 | 7                    | 8                    |
| H4      | 3.25                 | 3.50                 | 8                    | 9                    |

Table 9. V<sub>GS</sub>/G<sub>FS</sub> sorts (continued)

| Marking | V <sub>GS</sub> (min) | V <sub>GS</sub> (max) | G <sub>FS</sub> (min) | G <sub>FS</sub> (max) |
|---------|-----------------------|-----------------------|-----------------------|-----------------------|
| H5      | 3.25                  | 3.50                  | 9                     | 10                    |
| H6      | 3.25                  | 3.50                  | 10                    | 11                    |
| H7      | 3.25                  | 3.50                  | 11                    | 12                    |
| H8      | 3.25                  | 3.50                  | 12                    | 13                    |
| H9      | 3.25                  | 3.50                  | 13                    | 14                    |
| I1      | 3.50                  | 3.75                  | 5                     | 6                     |
| I2      | 3.50                  | 3.75                  | 6                     | 7                     |
| I3      | 3.50                  | 3.75                  | 7                     | 8                     |
| I4      | 3.50                  | 3.75                  | 8                     | 9                     |
| I5      | 3.50                  | 3.75                  | 9                     | 10                    |
| I6      | 3.50                  | 3.75                  | 10                    | 11                    |
| I7      | 3.50                  | 3.75                  | 11                    | 12                    |
| I8      | 3.50                  | 3.75                  | 12                    | 13                    |
| I9      | 3.50                  | 3.75                  | 13                    | 14                    |
| J1      | 3.75                  | 4.00                  | 5                     | 6                     |
| J2      | 3.75                  | 4.00                  | 6                     | 7                     |
| J3      | 3.75                  | 4.00                  | 7                     | 8                     |
| J4      | 3.75                  | 4.00                  | 8                     | 9                     |
| J5      | 3.75                  | 4.00                  | 9                     | 10                    |
| J6      | 3.75                  | 4.00                  | 10                    | 11                    |
| J7      | 3.75                  | 4.00                  | 11                    | 12                    |
| J8      | 3.75                  | 4.00                  | 12                    | 13                    |
| J9      | 3.75                  | 4.00                  | 13                    | 14                    |

## 8 Marking, packing and shipping specifications

Table 10. Packing and shipping specifications

| Order code | Packaging    | Pcs per tray | Dry pack humidity | Vgs and Gfs code | Lot code  |
|------------|--------------|--------------|-------------------|------------------|-----------|
| SD4933MR   | Plastic tray | 25           | < 10 %            | Not mixed        | Not mixed |

Figure 15. Marking layout

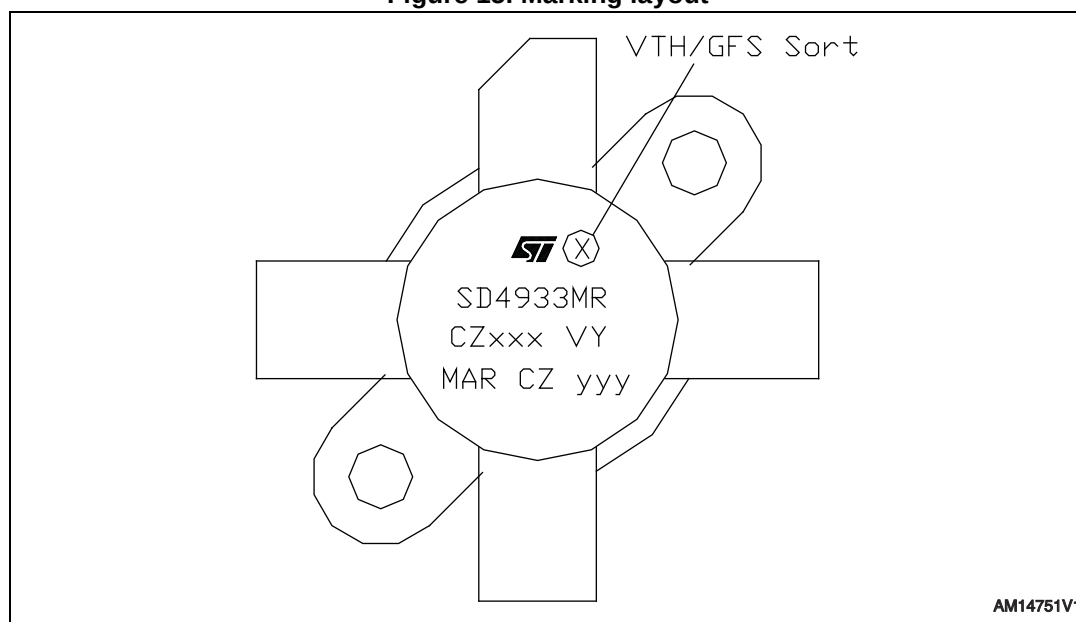


Table 11. Marking specifications

| Symbol | Description                              |
|--------|------------------------------------------|
| X      | V <sub>GS</sub> and G <sub>FS</sub> sort |
| CZ     | Assembly plant                           |
| xxx    | Last 3 digits of diffusion lot           |
| VY     | Diffusion plant                          |
| MAR    | Country of origin                        |
| CZ     | Test and finishing plant                 |
| y      | Assembly year                            |
| yy     | Assembly week                            |




## 9 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

**Table 12. M177MR mechanical data**

| Dim. | mm    |      |       |
|------|-------|------|-------|
|      | Min.  | Typ. | Max.  |
| A    | 5.72  |      | 5.97  |
| B    | 6.73  |      | 6.99  |
| C    | 21.84 |      | 22.10 |
| D    | 28.70 |      | 28.96 |
| E    | 13.34 |      | 14.10 |
| F    | 0.08  |      | 0.18  |
| G    | 2.49  |      | 2.74  |
| H    | 3.81  |      | 4.32  |
| I    |       |      | 7.87  |
| J    | 27.43 |      | 28.45 |
| K    | 15.88 |      | 16.13 |

Figure 16. M177MR drawing

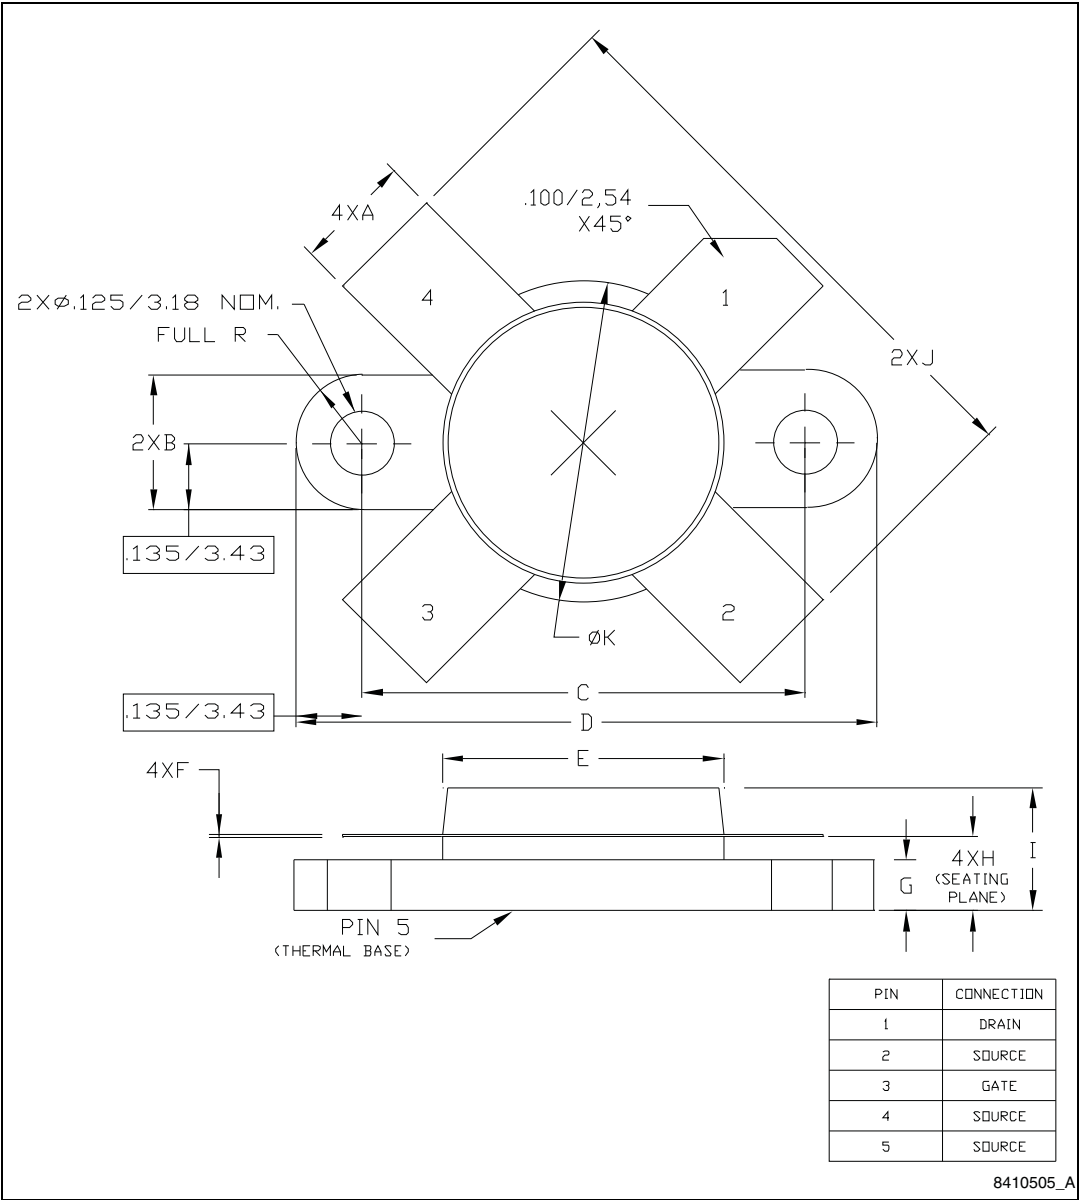

## 10 Revision history

**Table 13. Document revision history**

| Date        | Revision | Changes                                                      |
|-------------|----------|--------------------------------------------------------------|
| 13-Sep-2012 | 1        | Initial release.                                             |
| 22-May-2013 | 2        | Modified: $I_{GSS}$ value in <a href="#">Table 4: Static</a> |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)