
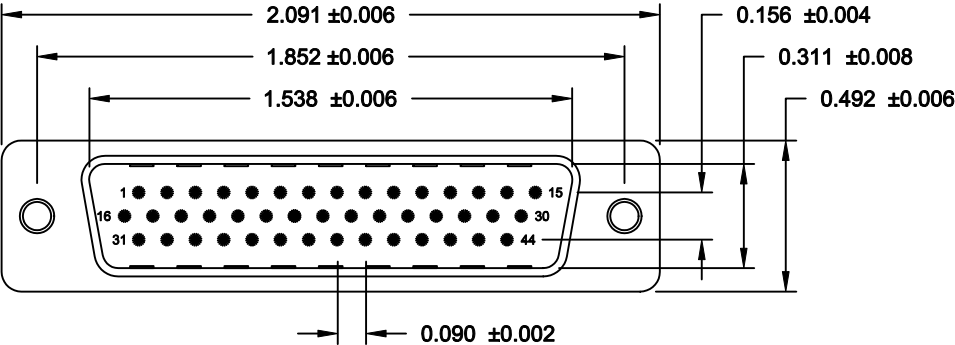
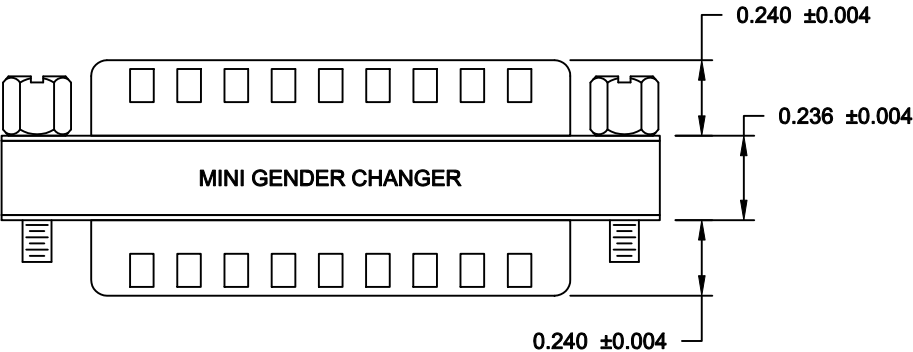


DESCRIPTION: 44-PIN MALE / MALE HIGH DENSITY GENDER CHANGER

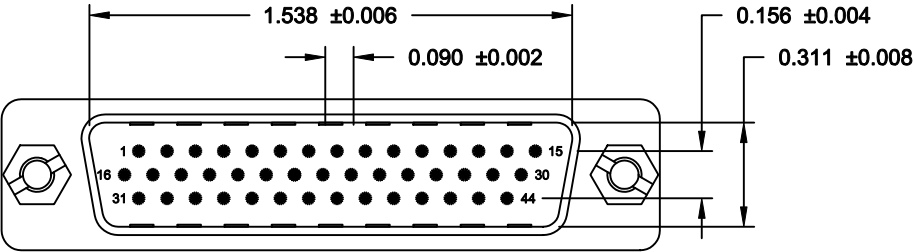


SPECIFICATION:

INSULATOR: PBT GLASS FIBER REINFORCED UL 94VO
CONTACT: BRASS
CONTACT PLATING: GOLD PLATED OVER NICKEL
SHELL: TIN PLATED SHELL
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
INSULATION RESISTANCE: 1,000 MegOHMS MIN @500 VDC
TEMPERATURE: -55° C - +105° C

NOTE:

LABEL: YELLOW COLOR WITH BLACK CHARACTORS
ONE SIDE: MINI GENDER CHANGER
OTHER SIDE: U.S.A. PATENT 5199906

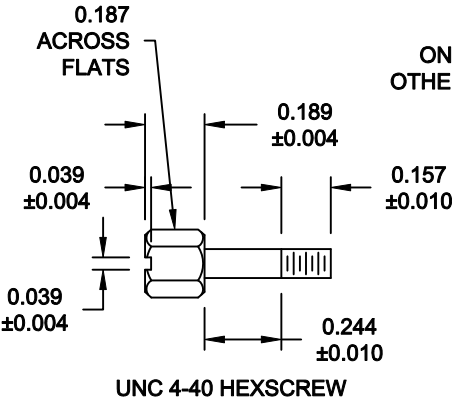

44-PIN MALE		44-PIN MALE
1	---	1
2	---	2
3	---	3
...		
43	---	43
44	---	44
SHELL	---	SHELL

PIN OUT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
10-15-07

CHECKED:

DATE:

SCALE:
1.5 : 1

SHEET
1 OF 1

REV
1

DWG NO.

GCHDLP44M44M

RoHS COMPLIANT

NorComp

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com