


Phase Control Thyristors

$$V_{RRM} = 800-1600 \text{ V}$$


$$I_{T(RMS)} = 50 \text{ A}$$

$$I_{T(AV)M} = 32 \text{ A}$$

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
900	800	CS 23-08io2
1300	1200	CS 23-12io2
1700	1600	CS 23-16io2



TO-208AA
(TO-48)



1 = Anode, 2 = Cathode, 3 = Gate

Symbol	Test Conditions	Maximum Ratings
$I_{T(RMS)}$	$T_{VJ} = T_{VJM}$	50 A
$I_{T(AV)M}$	$T_{case} = 85^{\circ}\text{C}; 180^{\circ}$ sine	25 A
	$T_{case} = 69^{\circ}\text{C}; 180^{\circ}$ sine	32 A
I_{TSM}	$T_{VJ} = 45^{\circ}\text{C};$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 450 A $t = 8.3 \text{ ms (60 Hz), sine}$ 480 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 400 A $t = 8.3 \text{ ms (60 Hz), sine}$ 430 A
I^2t	$T_{VJ} = 45^{\circ}\text{C}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 1010 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 970 A ² s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$ 800 A ² s $t = 8.3 \text{ ms (60 Hz), sine}$ 770 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $f = 50 \text{ Hz}, t_p = 200 \mu\text{s}$ $V_D = 2/3 V_{DRM}$ $I_G = 0.3 \text{ A}$ $di_G/dt = 0.3 \text{ A}/\mu\text{s}$	repetitive, $I_T = 75 \text{ A}$ 150 A/ μs non repetitive, $I_T = I_{T(AV)M}$ 500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM};$ $R_{GK} = \infty;$ method 1 (linear voltage rise)	$V_{DR} = 2/3 V_{DRM}$ 1000 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$ $I_T = I_{T(AV)M}$	$t_p = 30 \mu\text{s}$ 10 W $t_p = 300 \mu\text{s}$ 5 W
$P_{G(AV)}$		0.5 W
V_{RGM}		10 V
T_{VJ}		-40...+125 $^{\circ}\text{C}$
T_{VJM}		125 $^{\circ}\text{C}$
T_{stg}		-40...+125 $^{\circ}\text{C}$
M_d	Mounting torque	2.7-3.3 Nm 24-29 lb.in.
Weight		12 g

Features

- Thyristor for line frequencies
- International standard package JEDEC TO-208AA
- Planar glassivated chip
- Long-term stability of blocking currents and voltages


Applications

- Motor control
- Power converter
- AC power controller

Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling

Dimensions in mm (1 mm = 0.0394")

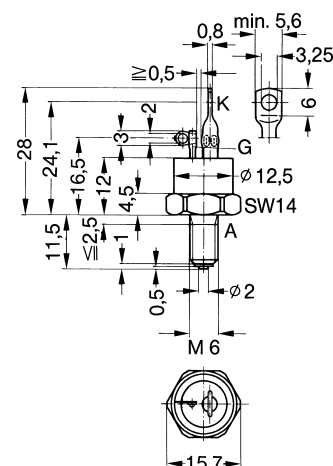

Data according to IEC 60747
IXYS reserves the right to change limits, test conditions and dimensions

Symbol	Test Conditions	Characteristic Values
I_R, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	≤ 3 mA
V_T	$I_T = 80$ A; $T_{VJ} = 25^\circ\text{C}$	≤ 1.8 V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)	1.0 V
r_T		10 m Ω
V_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$	≤ 2.5 V
	$T_{VJ} = -40^\circ\text{C}$	≤ 3.5 V
I_{GT}	$V_D = 6$ V; $T_{VJ} = 25^\circ\text{C}$	≤ 50 mA
	$T_{VJ} = -40^\circ\text{C}$	≤ 80 mA
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}		≤ 1 mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10$ μs $I_G = 0.15$ A; $di_G/dt = 0.15$ A/ μs	≤ 200 mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6$ V; $R_{GK} = \infty$	≤ 100 mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.15$ A; $di_G/dt = 0.15$ A/ μs	≤ 2 μs
t_q	$T_{VJ} = T_{VJM}; I_T = 25$ A, $t_p = 300$ μs ; $di/dt = -20$ A/ μs $V_R = 100$ V; $dv/dt = 20$ V/ μs ; $V_D = 2/3 V_{DRM}$	typ. 60 μs
R_{thJC}	DC current	1.0 K/W
R_{thJH}	DC current	1.61 K/W
d_s	Creepage distance on surface	1.5 mm
d_A	Strike distance through air	1.5 mm
a	Max. acceleration, 50 Hz	50 m/s ²

Accessories:

Nut M6 DIN 439/SW14

Lock washer A6 DIN 128

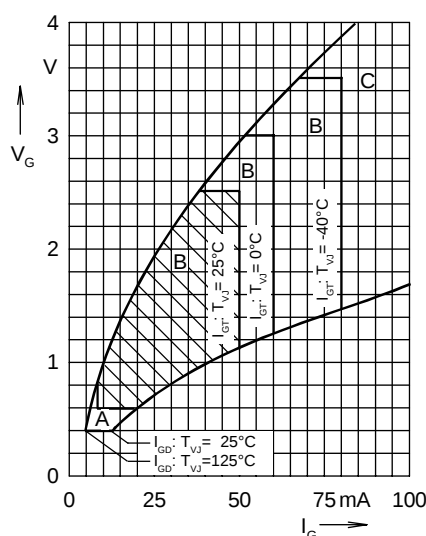


Fig. 1 Gate voltage and gate current
Triggering:
A = no; B = possible; C = safe

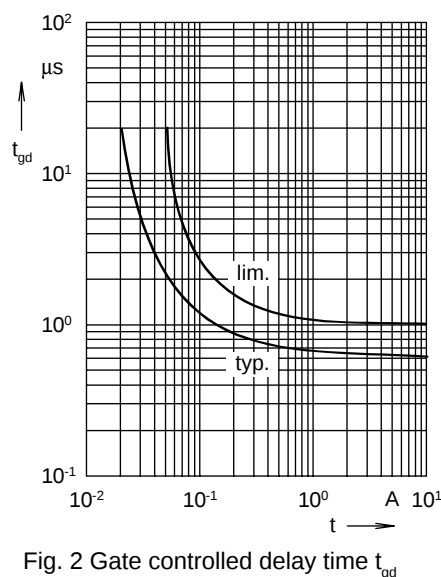


Fig. 2 Gate controlled delay time t_{gd}

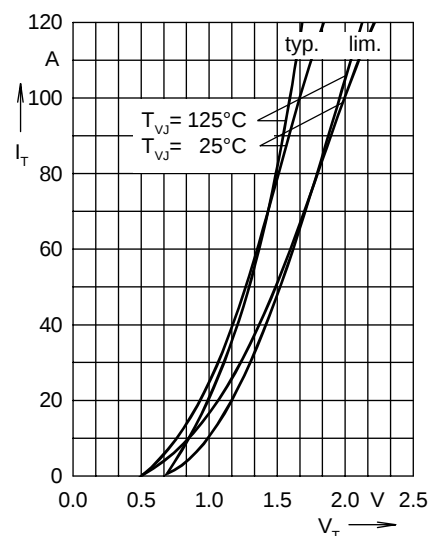


Fig. 3 On-state characteristics

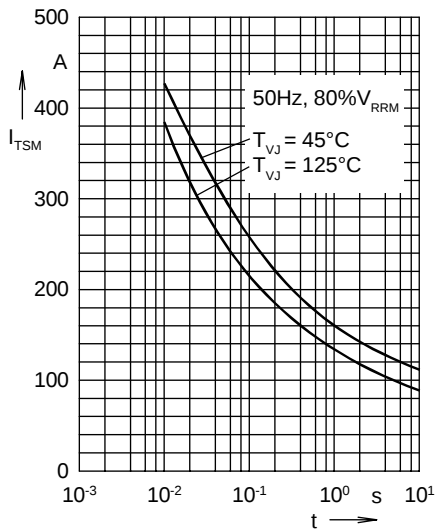


Fig. 4 Surge overload current
 I_{TSM} : crest value, t : duration

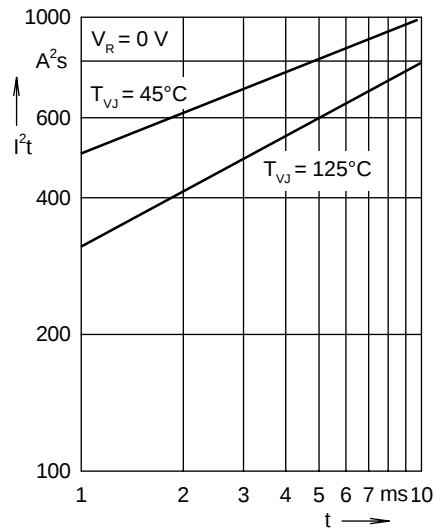


Fig. 5 I^2t versus time (1-10 ms)

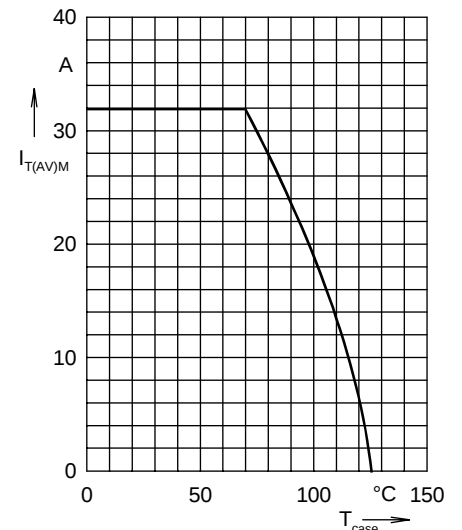


Fig. 6 Maximum forward current at case temperature 180° sine

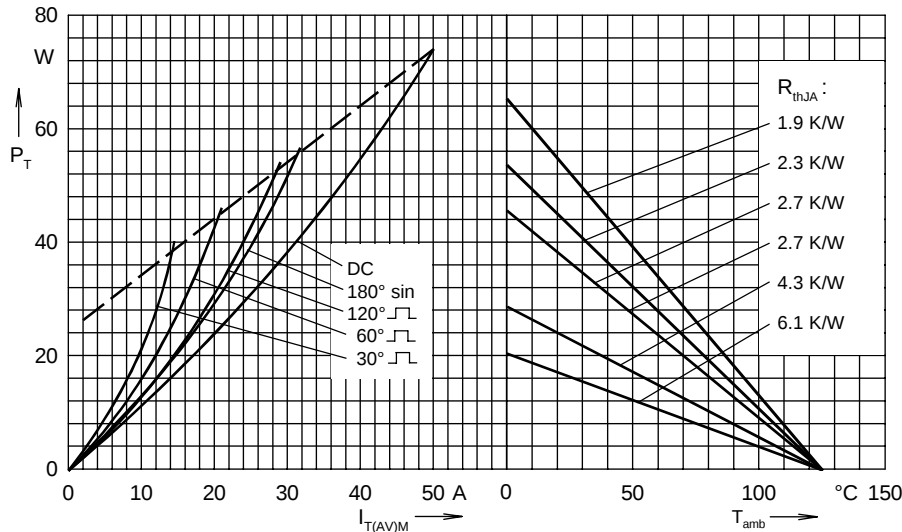


Fig. 7 Power dissipation versus on-state current and ambient temperature

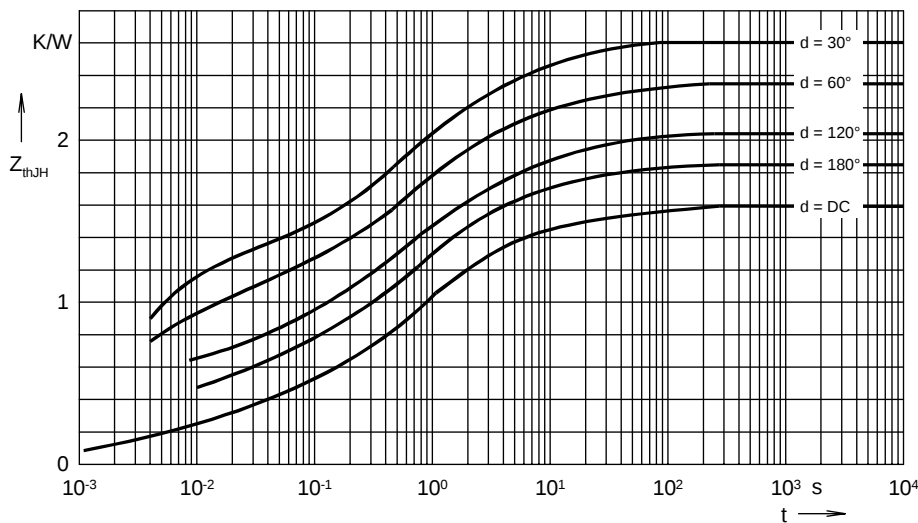


Fig. 8 Transient thermal impedance junction to heatsink

R_{thJH} for various conduction angles d :

d	R_{thJH} (K/W)
DC	1.61
180°	1.85
120°	2.03
60°	2.35
30°	2.60

Constants for Z_{thJH} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.224	0.003
2	0.132	0.028
3	0.321	0.216
4	0.522	1.1
5	0.249	4.2
6	0.162	43.2

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com