


LEDILSTAR-L for Lighting Ostar® LE W EXX

OSRAM



LEDILSTAR-L-S

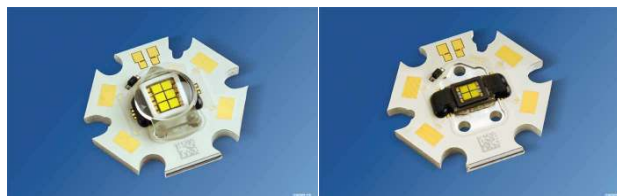

- Use with Ostar® LE W Exx series of white LED modules
- **Patented** system for creating a homogeneous, round light pattern without traces of light from single chips (mixing of light inside the lens)
- Lensmaterial optical grade PC (polycarbonate) with high UV and temperature resistance (130°C/260°F)



LEDILSTAR-L-W


- Extremely high optical efficiency, >80%, despite of strong mixing of light and large light source
- No lens holder. Fastening to heat sink
 - o with a few glue drops or
 - o 2 screws or
 - o by clamping
- Diameter 35 mm (MR11 size)
- Easy build of a complete luminaire using LEDILSTAR, Ostar® and heat sink
- Mechanical CAD models available upon request
- Both lens types have the same outer dimensions, which allow a cross use of them in the same lighting fixture.

LENS TYPES


NAME	ORDERING CODE	FWHM Angle, LE W E2A	FWHM Angle, LE W E2B	FWHM Angle, LE W E3A	FWHM Angle, LE W E3B
LEDILSTAR lighting SPOT	C10265_LedilStar-L-S	±6°	±8°	±6°	±8°
LEDILSTAR lighting WIDE	C10266_LedilStar-L-W	±16°	±18°	±16°	±18°

MEASUREMENT DATA & PHOTOGRAPHS

LEDILSTAR-L-S


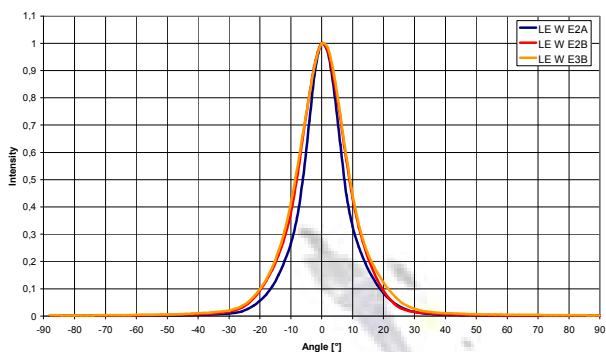


LEDILSTAR-L-W

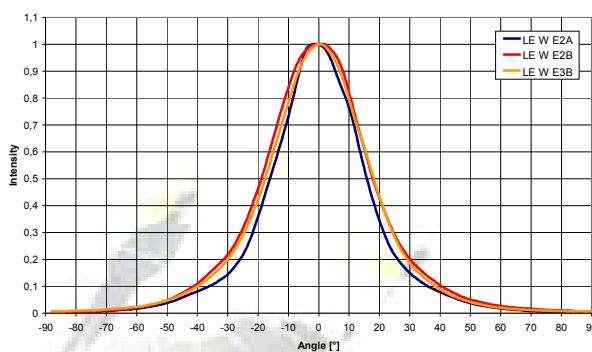

All measurements done at Osram Opto Semiconductors GmbH in Regensburg, Germany.

DIMENSIONS & ASSEMBLY

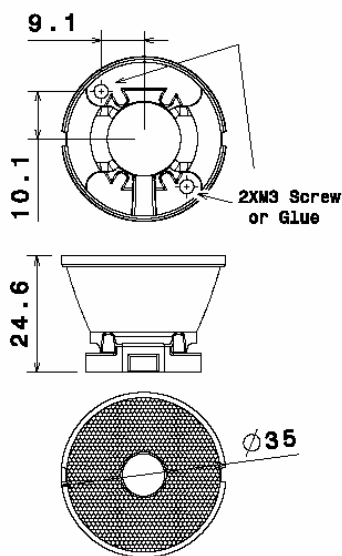

Position of Ostar

Screwing of lens

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com