


### 5N Type Side-operational 4R Light Touch Switches

Type: **EVQPC**

#### ■ Features


- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

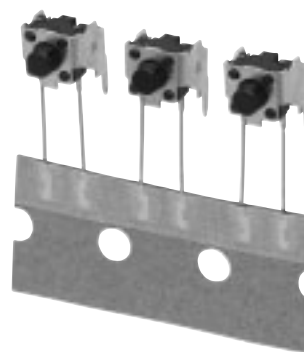


#### ■ Recommended Applications

- Operating switches for electronic equipment

#### ■ Explanation of Part Numbers

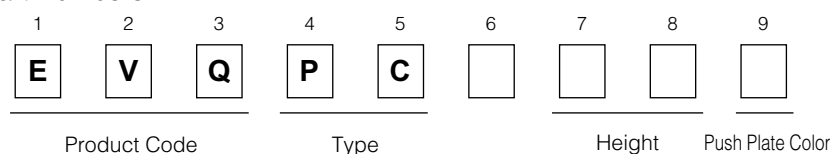

#### ■ Specifications



| Type                          |                                 | Snap action/Push-on type SPST                                                                |                   |
|-------------------------------|---------------------------------|----------------------------------------------------------------------------------------------|-------------------|
| Electrical                    | Circuit Diagram                 |         |                   |
|                               | Rating                          | 10 $\mu$ A 2 Vdc to 20 mA 15 Vdc (Resistiv load)                                             |                   |
|                               | Contact Resistance              | 50 m $\Omega$ max.                                                                           |                   |
|                               | Insulation Resistance           | 50 M $\Omega$ min. (at 100 Vdc)                                                              |                   |
|                               | Dielectric Withstanding Voltage | 250 Vac for 1 minute                                                                         |                   |
|                               | Bouncing                        | 3 ms max. (ON)<br>8 ms max. (OFF)                                                            |                   |
| Mechanical                    | Operating Force                 | 1.0 N $\pm$ 0.4 N<br>1.3 N $\pm$ 0.4 N<br>1.6 N $\pm$ 0.5 N                                  | 2.6 N $\pm$ 0.6 N |
|                               | Travel                          | 0.25 mm $\pm$ 0.10 mm                                                                        |                   |
| Endurance                     | Operating Life                  | 100000 cycles min.*                                                                          | 50000 cycles min. |
| Operating Temperature         |                                 | -20 $^{\circ}$ C to +70 $^{\circ}$ C                                                         |                   |
| Storage Temperature           |                                 | -40 $^{\circ}$ C to +85 $^{\circ}$ C (Bulk)<br>-20 $^{\circ}$ C to +40 $^{\circ}$ C (Taping) |                   |
| Minimum Quantity/Packing Unit |                                 | 700 pcs. Radial Taping (Reel Pack)                                                           |                   |
| Quantity/Cartron              |                                 | 7000 pcs.                                                                                    |                   |

\*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

## ■ Dimensions in mm (not to scale)

### EVQPC

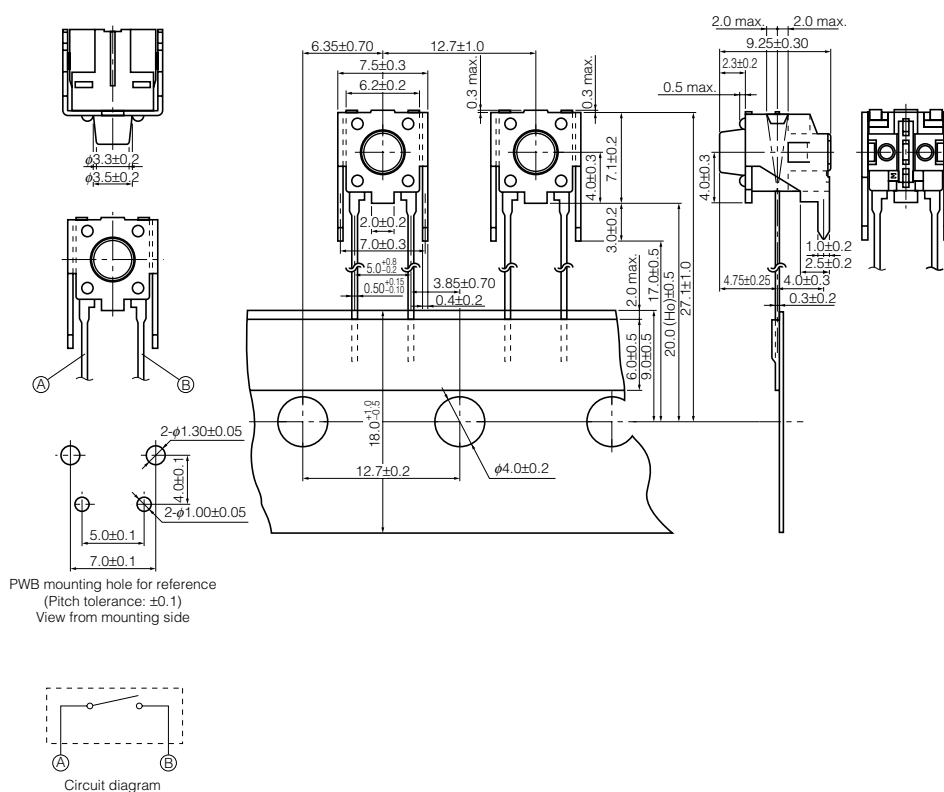

| Part Numbers | Operating Force | Push Plate Place | Push Plate Color | Operating Life | Insert Machine | H <sup>o</sup> Dimension |
|--------------|-----------------|------------------|------------------|----------------|----------------|--------------------------|
| EVQPC005K    | 1.0 N           | 4.75 mm          | Black            | 100000 cycles  | Panasert       | 20 mm                    |
| EVQPC105K    | 1.3 N           | 4.75 mm          | Black            | 100000 cycles  | Panasert       | 20 mm                    |
| EVQPC205K    | 1.6 N           | 4.75 mm          | Black            | 100000 cycles  | Panasert       | 20 mm                    |
| EVQPC305K    | 2.6 N           | 4.75 mm          | Black            | 50000 cycles   | Panasert       | 20 mm                    |
| EVQPC405K    | 1.0 N           | 4.75 mm          | Black            | 100000 cycles  | Avisert        | 21 mm                    |
| EVQPCP05K    | 1.3 N           | 4.75 mm          | Black            | 100000 cycles  | Avisert        | 21 mm                    |
| EVQPC605K    | 1.6 N           | 4.75 mm          | Black            | 100000 cycles  | Avisert        | 21 mm                    |
| EVQPC705K    | 2.6 N           | 4.75 mm          | Black            | 50000 cycles   | Avisert        | 21 mm                    |

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)