




- **Extremely durable, vinyl jacketed Stainless Steel Cable Tie.**
- Smooth vinyl jacketing prevents damage to installation cable insulation.
- Stainless steel crimp sleeve for easy field installation with electrician linesman pliers, or wire cutters.
- UV protected vinyl jacket is excellent for solar installation where product durability is required.
- Use standard wire cutters to both crimp the sleeve and cut the excess wire.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.

Heyco® SunBundler® Stainless Steel *Wire* Cable Ties

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength		Max. Bundle Diameter		100 Pack	Bulk		A Length		B Diameter	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.
Black vinyl jacketed 302/304 stainless steel wire										
100	440	2.30	58,4	S6408	S6409	SunBundler® 8	8	203		
		2.92	74,2	S6410	S6411	SunBundler® 10	10	254		
		3.88	98,6	S6412	S6413	SunBundler® 12	12	305	.06	1,6
		4.20	106,7	S6414	S6415	SunBundler® 14	14	356		
		6.36	161,5	S6420	S6421	SunBundler® 20	20	508		

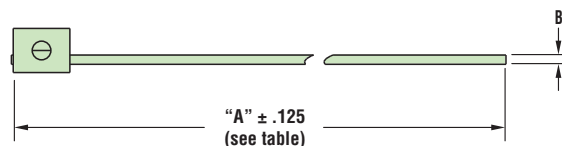

Material

Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket and 304 stainless steel crimp sleeve

Certifications



Certified by Underwriter's Laboratories for Compliance with both Canadian and U.S. Requirements under File E54523





- **Easy to use: Just twist on wire!**
- Designed to shield heavier cables and cable bundles; **extend cable life.**
- Available in a **variety of sizes** that fit cable and cable bundles from 3/4" to 6" in diameter.
- **Smooth finished interior wall.**
- **Highly flexible** for ease of movement.
- Packaged as one continuous piece in a box, not spooled.
- May be **cut to desired length**, please consult Heyco.

Heyco® SunWrap™ - Heavy Duty Cable Guard

**ALL NEW
PRODUCTS!**

BUNDLE RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter				A Outside Dia.	B Pitch		C Thickness		
in.	mm.	in.	mm.	Black			in.	mm.	in.	mm.	in.
.75	19,1	1.50	38,1	8964	CWG 99 PE	.93	23,6	.95	24,1	.12	3,0
1.00	25,4	2.00	50,8	8966	CWG 126 PE	1.12	28,4	1.25	31,8	.13	3,3
1.25	31,8	2.50	63,5	8968	CWG 153 PE	1.37	34,8	1.35	34,3	.14	3,5
1.50	38,1	3.00	76,2	8970	CWG 181 PE	1.62	41,1	1.50	38,1	.15	3,9
2.00	50,8	3.50	88,9	8972	CWG 234 PE	2.09	53,1	1.60	40,6	.17	4,3
3.50	88,9	6.00	152,4	8974	CWG 401 PE	3.50	88,9	1.95	49,5	.25	6,4

*Standard color black or color coded

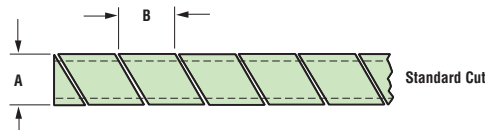

Material

High Density Polyethylene

Certifications



Recognized under the Component Program of Underwriter's Laboratories File E54523

Flammability Rating

94-HB

Temperature Range

0°F (-18°C) to 165°F (74°C)

*Quick
Specs*

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com