




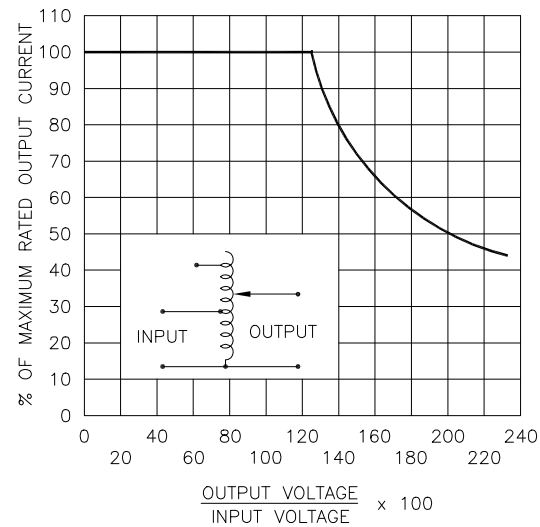


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

V.D. = VOLTAGE DOUBLER.

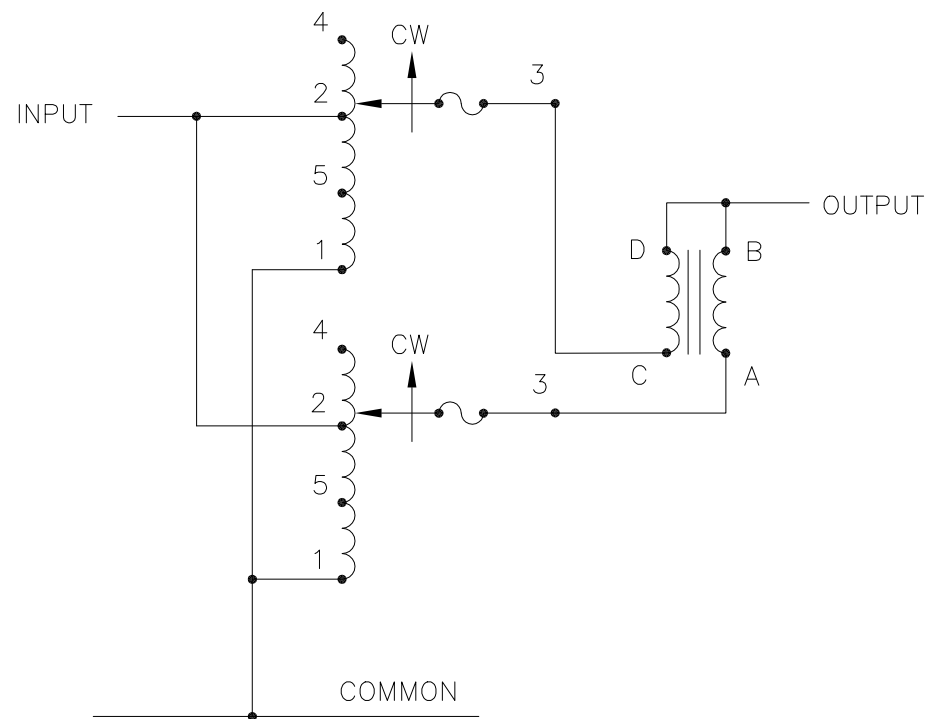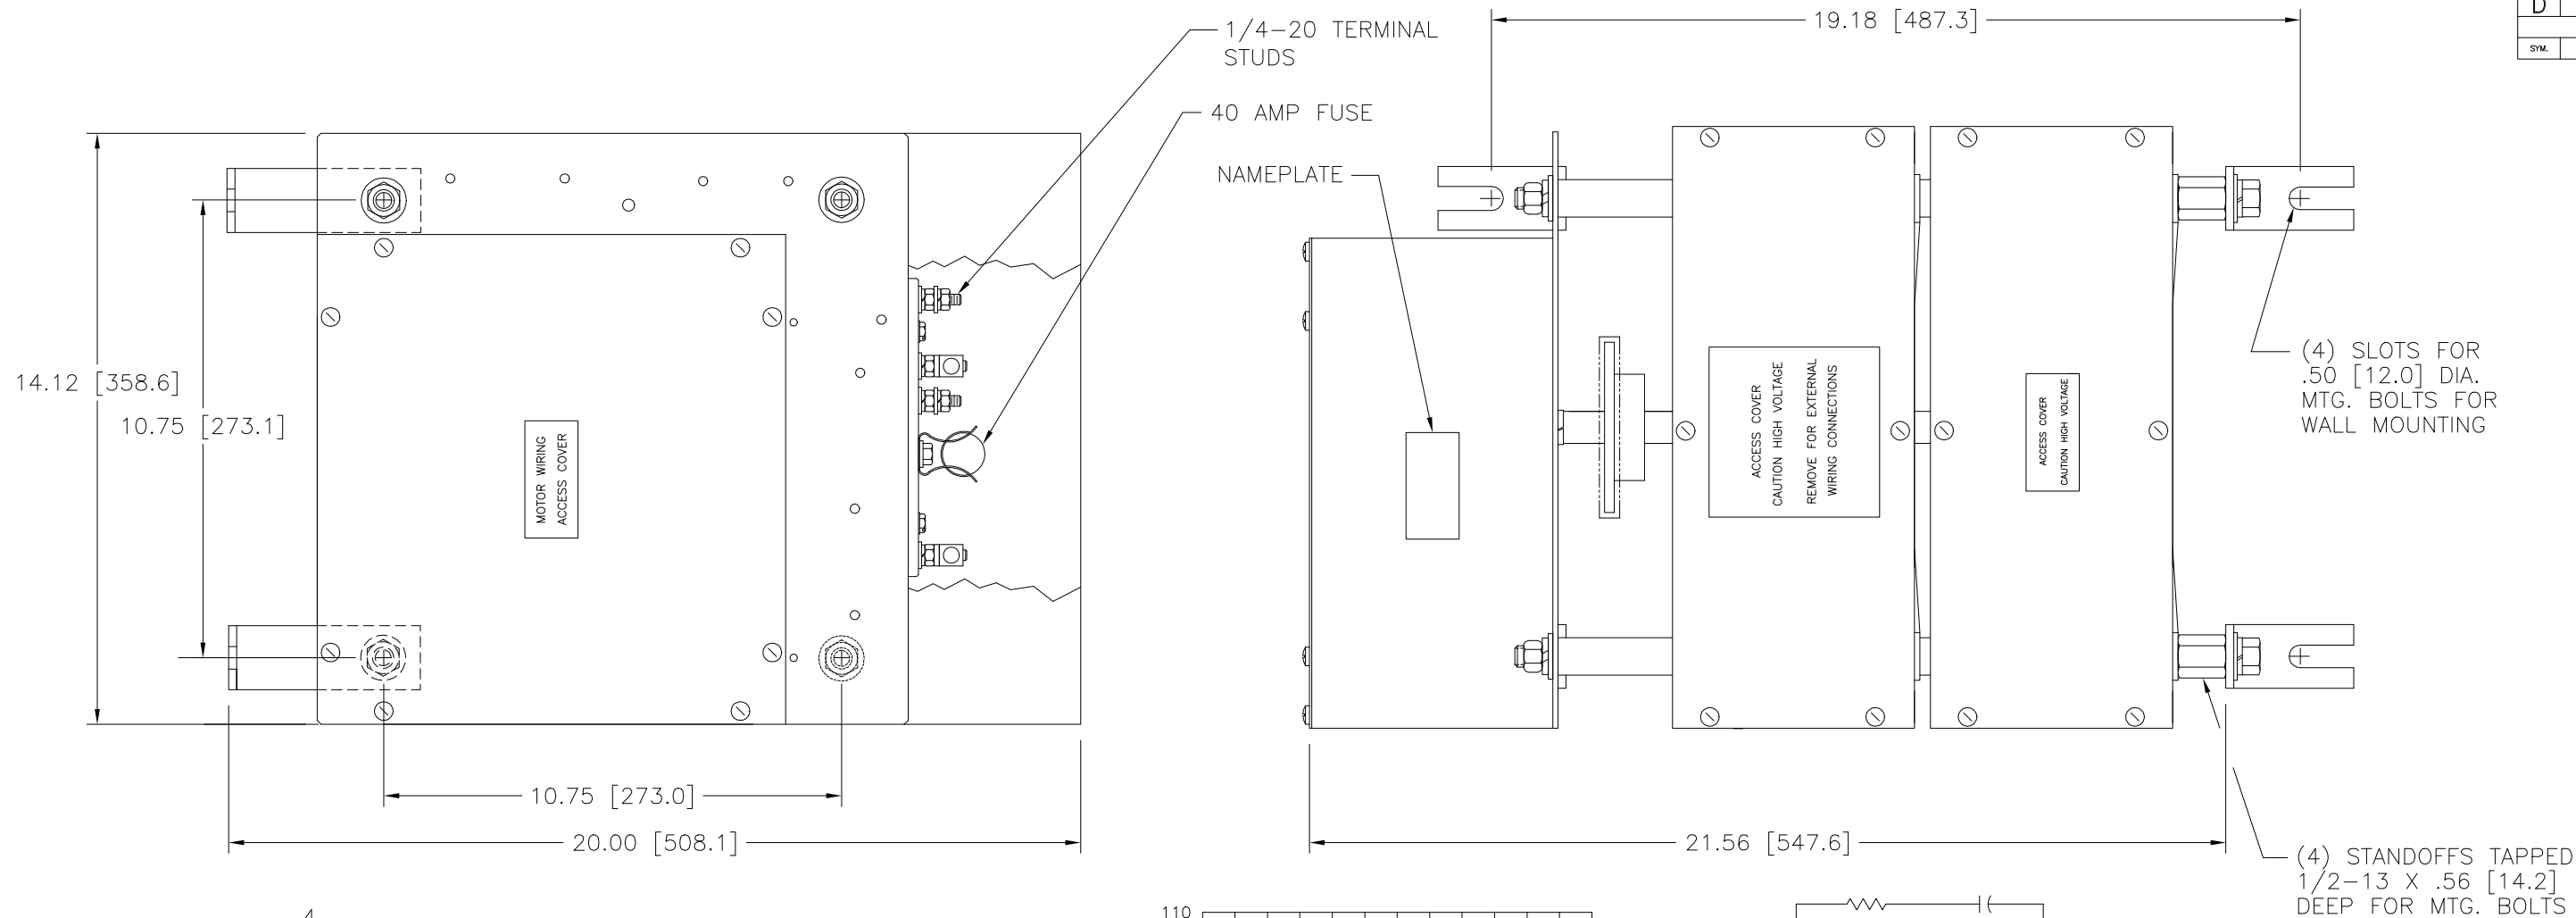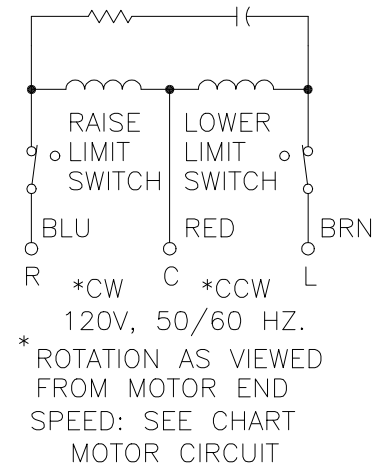

SPEED (SECONDS)	TYPE NO.
5	5M6020CT-2P
15	15M6020CT-2P
30	30M6020CT-2P
60	60M6020CT-2P

SPECIFICATIONS									
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END		
							INPUT	JUMPER	OUTPUT
SINGLE PHASE PARALLEL	240	50/60	0-240	70	16.8	CW	1-4	—	1-B
			0-280	70	19.6	CW	1-2	—	1-B
	120	50/60	0-280	70*-30 V.D.	8.4 ++	CW	1-5	—	1-B
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX, HOLES .002, ANGLES 1°, DRAFT 1-1/2°, UNITS IN [mm]									
MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING									
TITLE: SPEC. CONTROL DWG. VARIABLE TRANSFORMER 5,15,30&60M6020CT-2P									
DRAWN BY F. SEALE		DATE 9/19/96		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL	
CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO. 83008		DWG. NO. 032-7629	
ENGINEER		DATE		SCALE .5=1		SHEET 1 OF 1		DWG. NO. 032-7629	



Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com