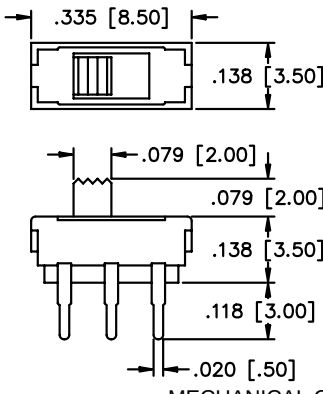


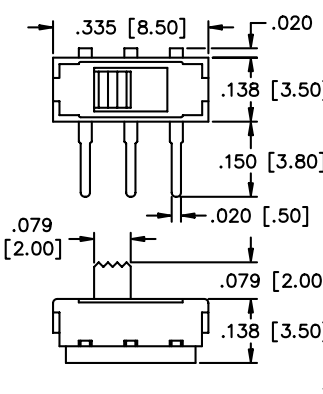




MHSS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 6 VDC Initial contact resistance: 60 milliohms max. Insulation resistance: 100 megohms min. at 100 VDC Dielectric strength: 100 VAC for 1 minute Electrical life: 5000 cycles min. Operating temperature range: -20°C to +70°C Solder heat resistance: 350°C max. for 3 seconds Washing not recommended	- Excellent tactile feed-back (detent action). - Molded-in terminals minimize flux or solder entry. - Ultra-compact case size. - Low profile.
	MATERIALS
	Contacts & terminals: Silver plated Case: 30% Glass filled nylon, type 6/6, black Actuator: Nylon, type 6/6, black (blue for MHSS2220 only)

MODEL NO.			
MHSS1104			
	1P2T		
	 ● = COMMON	SCHEMATIC	MECHANICAL OUTLINE
MODEL NO.			
MHSS1105			
	1P2T		
	 ● = COMMON	SCHEMATIC	MECHANICAL OUTLINE

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com