

Rating	10A 125V, 6A 250V AC 1/2HP 125/250VAC	
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C ~ 85°C	
Switch Function	2P SPST (ON)-OFF	

() = Momentary Function

***MATERIAL:**

Frame: Black, Nylon 66 (94-V2)


Actuator: Black, PC (94-V2)

Waterproof Rubber: Black, Silicone


Terminals: Silver plated, Copper alloy

Printed: None

Waterproof: IP65








Mounting Hole

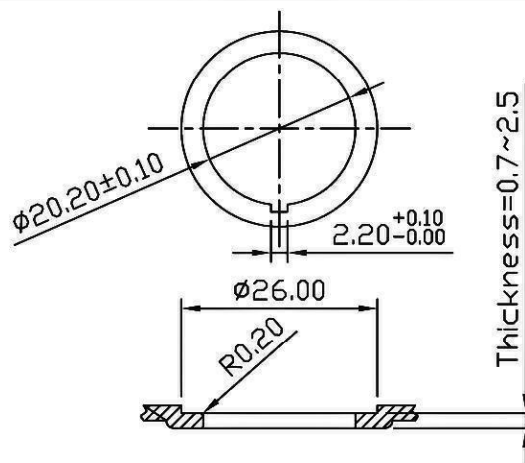

Circuit Diagram

(ON)

OFF

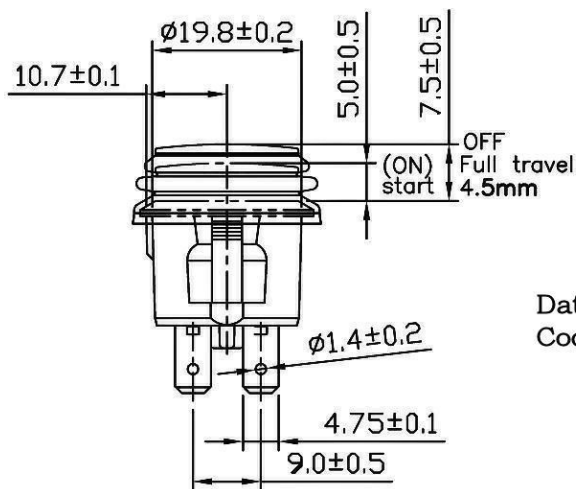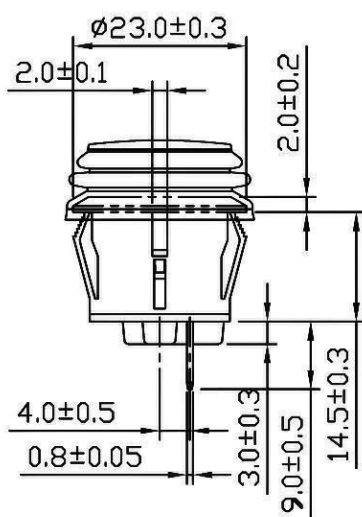

RoHS Compliant

1 Added date code. 1/18/11.

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/18/11

Rev. 1

Unit: mm

Checked By: G.Guld

Title:
PUSH BUTTON SWITCH

CW P/N:
GPB527C202BB

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com