



Mallory Sonalert Products, Inc.

Part #:

SBM616PR

Sales Outline Drawing

Revision:


B

Specifications:

Sound Level Category	Medium
Mode of Operation	Fast Pulse @ 2 - 10 PPS
Voltage Rating	6 to 16 Vdc
Frequency	2900 $\pm$ 500 Hz
Loudness @ Min Vdc	68 dB(A) @ 2 Feet and 6 Vdc
Loudness @ Max Vdc	78 dB(A) @ 2 Feet and 16 Vdc
Current Draw	3-12 mA
Duty Cycle (%)	50
Mounting	Printed Circuit Board (See Note B)
Housing Material	6/6 Nylon, Color: Black
Storage Temperature	-40° to +85° C
Operating Temperature	-30° to +65° C
Weight (Typical)	0.6 oz (17g)
Options	Please contact factory.

Dimensions: Inches (mm)

ROHS Compliant

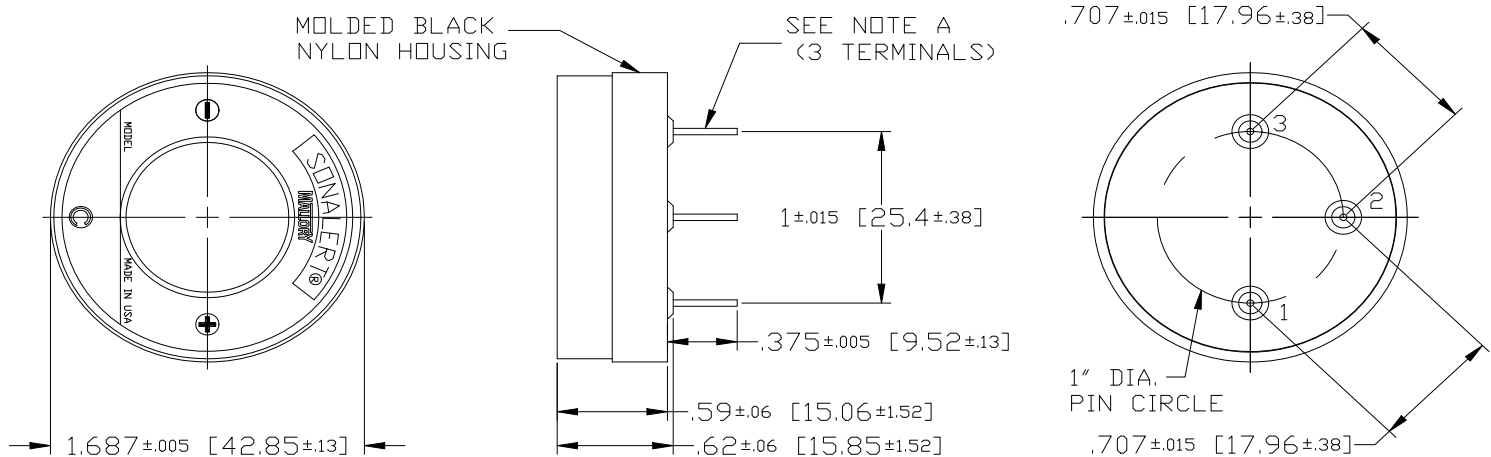

NOTE A:

TERMINALS - .031" DIA. SOLDER COATED COPPER-CLAD STEEL. TERMINAL 1 IS POSITIVE, TERMINAL 3 IS NEGATIVE. TERMINAL 2 IS FOR SUPPORT ONLY - NO ELECTRICAL CONNECTION.

NOTE B:

MOUNTING - INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com