


.072 WIDE X .038
DEEP KEYWAY

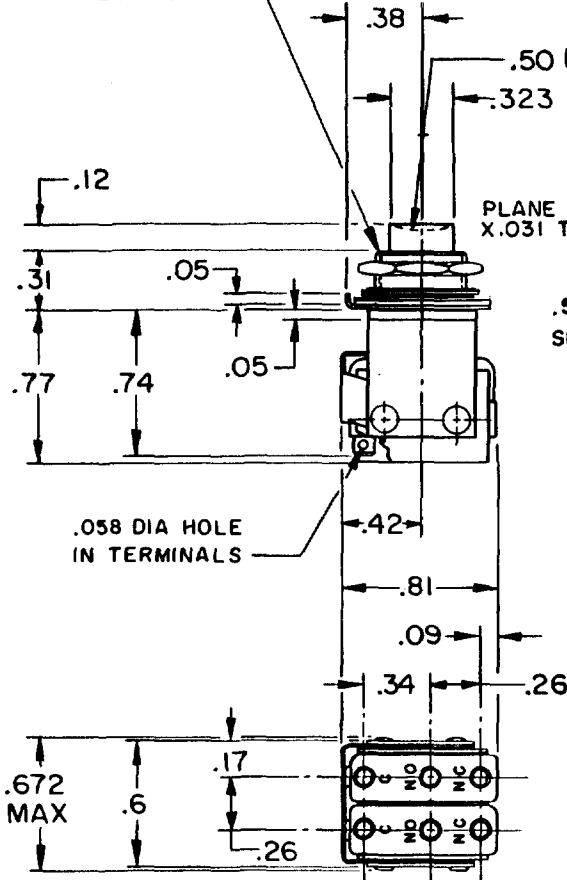

15/32-32 NS THREAD TO WITHIN .094 OF
SHOULDER

BLACK PLASTIC PLUNGER

PLANE WASHER .72 DIA
X .031 THICK

HEX NUT .56 ACROSS FLATS X .09
THICK ⁴

INTERNAL TOOTH LOCKWASHER
.615 ± .015 DIA X .022 REF THICK ⁴

CORROSION RESISTANT STEEL
KEYING WASHER, .719 ± .015 DIA
X .031 THICK, TAB .110 WIDE ⁴

FLEXIBLE INSULATORS

.110 DIA

NOTES

- 1-UNIT INCLUDES CAT. LIST "ISM" TYPE BASIC SWITCH (2)
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-BASIC SWITCHES OPERATE WITHIN .008 OF EACH OTHER
(PUSHBUTTON PLUNGER TRAVEL)
- ⁴ MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — 1 1/2 LB APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

250 VAC — — — — — 5 AMP
30 VOLTS DC RATING
INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP
50,000 FT — — — 2.5 AMP
RESISTIVE — — — — — SEA LEVEL — — — 5 AMP
50,000 FT — — — 5 AMP
MAXIMUM INRUSH — — — — — 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

A3

2PB2
PAGE 1 OF 1

M

DRAWING
NUMBER

9

ISSUE

REVISIONS

A	CO19743	22 OCT 98
M B F		
26 MAR 65		
B	CO31782	22 OCT 98
D B W		
16 MAR 73		
C	CO-93593	22 OCT 98
P P F		
22 OCT 98		

REPLACES

RELEASE NO.

CHECK

J A F

CHECK

26 APR 65

LSD

CHECK

26 MAR 65

DRAWN

M B F

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com