

FP-2B-2

MicroGripper - 1.25mm to 0.3mm Lead Pitch

FEATURES


- Used with SMT packages down to 0.3mm lead pitch
- Thin clip body width allows many lead grippers to be mounted side-by-side for simultaneous testing
- Maximum frequency is 100MHz



SPECIFICATIONS

Temperature Range:	0-70°C
Conductor Resistance:	(Short) 22 mOhms
Conductor Resistance:	(Long) 55 mOhms
Contact Resistance:	10 mOhms
Tines Diameter:	0.15mm
Body Height:	14mm
Body Material:	ABS
Voltage Usage:	+/- 40V
Rating:	500 WVDC
Bandwidth:	(3db) >100MHz
Inductance:	< 1mH @ 1KHz
Capacitance:	< 2.0pF @ 1KHz
Material:	Steel wire or stainless steel, nickel-plated

DIMENSIONS

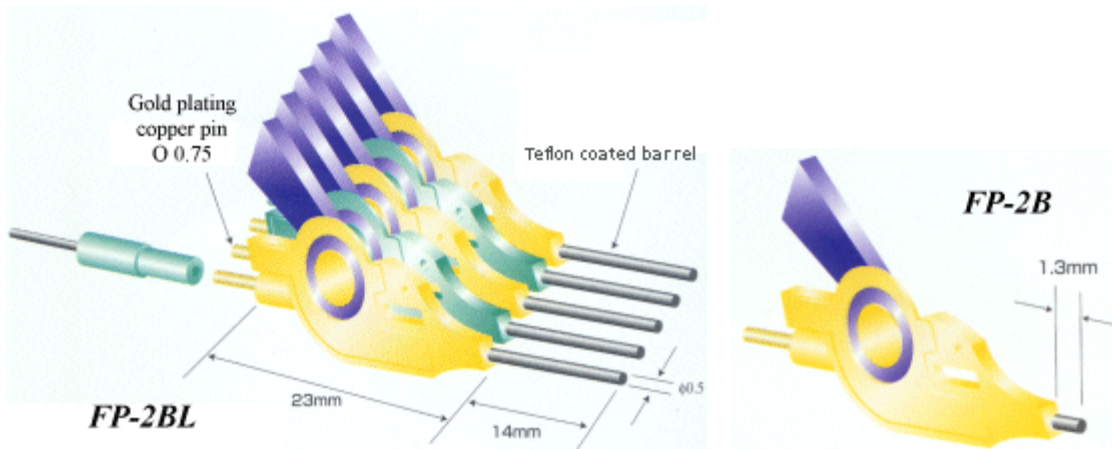

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com