


Multilayer Chip Directional Couplers For 2.4GHz W-LAN


Conformity to RoHS Directive

HHM Series HHM2919A2

SHAPES AND DIMENSIONS

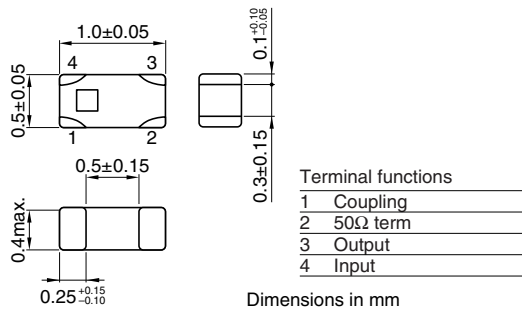

RECOMMENDED PC BOARD PATTERNS

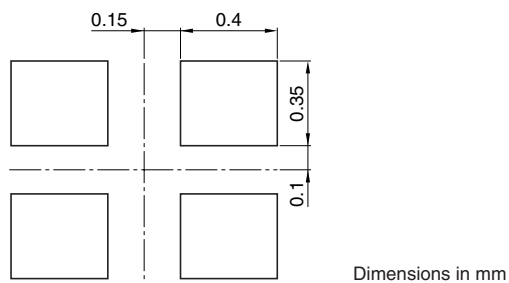

ELECTRICAL CHARACTERISTICS

Frequency range	2400 to 2500MHz	
Coupling factor	18.2±1.0dB	
Insertion loss	0.25dB max.*1	
	0.28dB max.*2	
Isolation	32dB min.	
VSWR	1.3max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C

*1 25°C


*2 Operating temperature

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


COUPLING

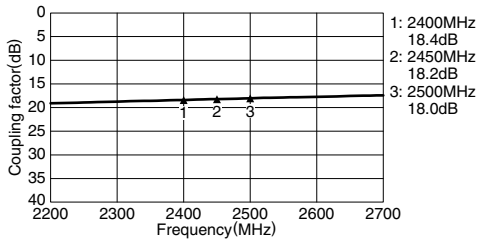


ISOLATION & DIRECTIVITY

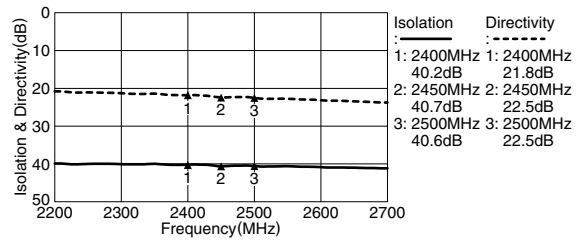

INSERTION LOSS

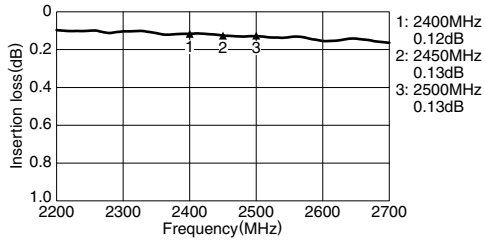

VSWR

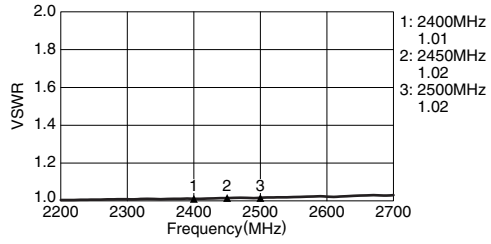

• All specifications are subject to change without notice.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com