


59050 PCB Mount Features and Benefits



Features

- 2 part magnetically operated proximity sensor
- Standard normally open and high voltage normally open contact configuration
- Moulded stand-offs to allow board washing
- Customer defined sensitivity


Benefits

- Mounts directly into printed circuit board
- No standby power requirement
- Operates through non-ferrous materials such as wood, plastic or aluminium
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination
- Simple installation and adjustment

Applications

- Position and limit sensing
- Security system switch
- Door switch

DIMENSIONS (in) mm

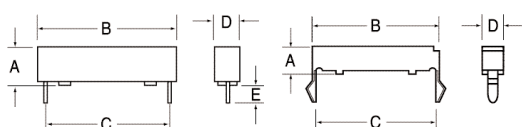

	A Max	B Max	C ± .10 (0,25)	D Max	E ± .015 (0,38)
57050	(.265) 6,73	(.900) 22,86	See Note Below	(.180) 4,57	—
59050	(.265) 6,73	(.900) 22,86	(.800) 20,32	(.170) 4,32	(.130) 3,30

Mounting: (.062) 1,57 thick board, (.125) 3,17 holes 13,72 on (.720) 18,28 nom. centres.

CUSTOMER OPTIONS - Switching Specifications

TABLE I			Normally Open	Normally Open High Voltage
Contact Type			I	2
Switch Type	Power	Watt - max.	10	10
	Switching	Vdc - max.	200	300
Voltage	Breakdown	Vdc - min.	250	450
	Switching	A - max.	0.5	0.5
Current	Carry	A - max.	1.2	1.5
	Contact, Initial	Ω - max.	0.2	0.2
Resistance	Insulation	Ω - min.	10 ¹⁰	10 ¹⁰
	Contact	pF - typ.	0.3	0.2
Capacitance	Operating	°C	-40 to +105	-20 to +105
	Storage	°C	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	1.0	1.0
	Release	ms - max.	1.0	1.0
Shock	11ms 1/2 sine	G - max.	100	100
Vibration	50-2000 Hz	G - max.	30	30

CUSTOMER OPTIONS - Sensitivity, Cable Length and Termination Specification

TABLE 2							
Sensitivity Options:- Activate Distances are approximate using Hamlin 57050 actuator as illustrated Switch AT before modification							
Select Option		S		T		U	
Switch Type		Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm	Pull In AT Range	Activate Distance d (in) mm
1	Normally Open	12-18	(.295)	17-23	(.236)	22-28	(.197)
2	High Voltage		7,5		6,0		5,0

ORDERING INFORMATION

59050	-	X	-	X	-	00	-	0
Series 59050								
Switch Type	Table I							
Sensitivity	Table 2							

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: sales.de@hamlin.com
Hamletrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com