22mm Non-Illuminated Metal Selector Switch Operators









Certified for **NEMA Type 4X** 12 environment.

Key Selector with mounting bracket





Other key combinations and colors are available on request.

All keys are "keyed alike". Different keys are available on request.

Color		Description	Key Removal	Cat No.
Black	V	Maintained	Left/Right	2AK2-01
Black	V	Maintained	Left	2AK2-02
Black	V	Maintained	Right	2AK2-03
Black	ℴℴ	Spring Return	Left	2AK2-04
Black	\checkmark	Maintained	Left/Right	2AK2-05
Black	$\mathring{\mathbb{V}}$	Maintained	All	2AK2-06
Black	$\stackrel{\circ}{\mathbb{V}}$	Maintained	Center	2AK2-07
Black	₩,	Spring Return	Center	2AK2-08
Black	₩,	Spring Return	Center	2AK2-09
Black	❖	Spring Return	Center	2AK2-10
Black	\checkmark	Maintained	Left	2AK2-11
Replace	2KY455			

Selector with mounting bracket





Other colors are available on request.

Color **Description** Cat No. Black Maintained 2AS2-1 Black Spring Return 2AS2-2 Black Maintained 2AS2-3 Black Spring Return 2AS2-4 Black Spring Return 2AS2-5 Black Spring Return 2AS2-6

Extended Selector





Other colors are available on request.

Color		Description	Cat No.
Black	~	Maintained	2AS2E-1
Black	~	Spring Return	2AS2E-2
Black	ŵ	Maintained	2AS2E-3
Black	♣	Spring Return	2AS2E-4
Black	₩	Spring Return	2AS2E-5
Black	\$	Spring Return	2AS2E-6





Markings on Request









Altech Push Buttons are available in a variety of markings, including molded arrows. Please contact Altech for further information and part numbers.

Switch Contacts (sold separately)





- Heavy-duty contact blocks with mounting screws. Blocks can be stacked 2 blocks across by 3 blocks deep for a total of 6 circuits.
- Contact blocks are available with silver contacts or gold plated contacts
- · Self-wiping contacts

Panel Mount

Normally Open Silver S1
Normally Closed Silver S2
Normally Open Gold Plated S3
Normally Closed Gold Plated S4

Base Mount*

Normally Open Silver S5
Normally Closed Silver S6
Normally Open Gold Plated S7
Normally Closed Gold Plated S8


* For use with non-illuminated operators in thermoplastic or aluminum enclosures listed on pages 30 and 36-37.

22mm Non-Illuminated Metal Selector Switch Operators


Dimensional Drawings

All dimensions shown in millimeters. To convert to inches multiply by 0.03937

Key Selector



Extended Selector




3 POSITION SELECTOR SWITCH CONTACT BLOCK GUIDE


®	①	Ø	CONTACTOR BLOCK GUIDE
×	0	0	1 NO (left)
0	×	0	2 NC in series (side × side)
0	0	×	1 NO (right)
×	×	0	1 NC (right)
0	×	×	1 NC (left)
×	0	×	2 NO in parallel (side × side)

(Left or right as seen from front of operator)

Selector



Exploded Assembly View

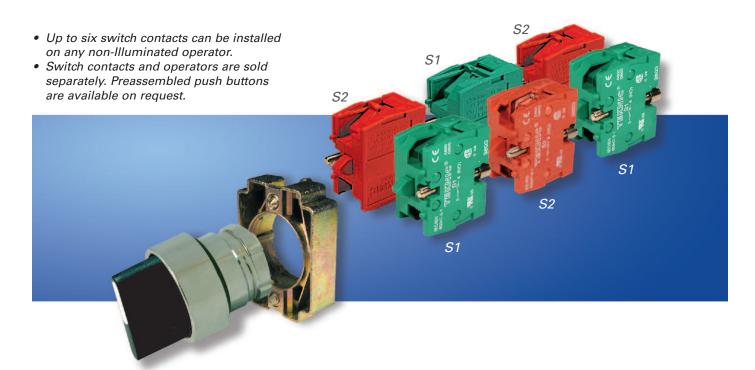

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com