

General purpose (dual digital transistors)

EMB9 / UMB9N / IMB9A

●Features

- 1) Two DTA144Ys in a EMT or UMT or SMT package.
- 2) Mounting possible with EMT3 or UMT3 or SMT3 automatic mounting machines.
- 3) Transistor elements are independent, eliminating interference.
- 4) Mounting cost and area can be cut in half.


●Structure

Epitaxial planar type

PNP silicon transistor (Built-in resistor type)

The following characteristics apply to both DTr1 and DTr2.

●Equivalent circuit

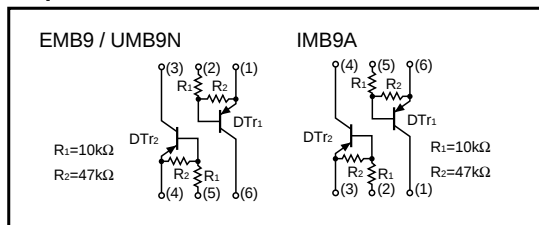

●Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Supply voltage	V_{CC}	-50	V
Input voltage	V_{IN}	-40 6	V
Output current	I_O	-70	mA
	I_C (Max.)	-100	
Power dissipation	EMB9, UMB9N	150 (TOTAL)	mW ^{*1}
	IMB9A	300 (TOTAL)	mW ^{*2}
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C

*1 120mW per element must not be exceeded.

*2 200mW per element must not be exceeded.

●External dimensions (Unit : mm)

EMB9




Each lead has same dimensions

ROHM : EMT6

Abbreviated symbol : B9

UMB9N




Each lead has same dimensions

ROHM : UMT6

EIAJ : SC-88

Abbreviated symbol : B9

IMB9A



Each lead has same dimensions

ROHM : SMT6

EIAJ : SC-74

Abbreviated symbol : B9

Transistors

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	—	—	-0.3	V	$V_{CC} = -5V, I_o = -100\mu A$
	$V_{I(on)}$	-1.4	—	—		$V_o = -0.3V, I_o = -1mA$
Output voltage	$V_{O(on)}$	—	-0.1	-0.3	V	$I_o/I_i = -5mA/-0.25mA$
Input current	I_i	—	—	-0.88	mA	$V_i = -5V$
Output current	$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = -50V, V_i = 0V$
DC current gain	G_i	68	—	—	—	$V_o = -5V, I_o = -5mA$
Transition frequency	f_r	—	250	—	MHz	$V_{CE} = -10mA, I_E = 5mA, f = 100MHz$ *
Input resistance	R_i	7	10	13	k Ω	—
Resistance ratio	R_2 / R_1	3.7	4.7	5.7	—	—

* Transition frequency of the device

●Packaging specifications

Type	Package	Taping		
	Code	T2R	TN	T148
	Basic ordering unit (pieces)	8000	3000	3000
EMB9		○	—	—
UMB9N		—	○	—
IMB9A		—	—	○

●Electrical characteristic curves




Fig.1 Input voltage vs. output current (ON characteristics)




Fig.2 Output current vs. input voltage (OFF characteristics)




Fig.3 DC current gain vs. output current




Fig.4 Output voltage vs. output current

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com