

REV. Status REVISION -2/18/99 TS


- A. Electrical Specifications (@25°C)
  - 1. Rated Voltage; 250V AC 50/60Hz
  - 2. Rated Current; 1A AC
  - 3. Common Mode Inductance (@ 1KHz); 10mH MIN
  - 4. DC Resistance; (each winding)  $0.55\Omega$  MAX
  - 6. Insulation Resistance;  $100M\Omega$  MIN at 500VDC Winding to Winding, Winding to Core
  - 7. HiPot test; AC 2.0KV 1 minute Winding to Winding, Winding to Core

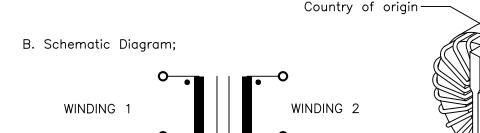

C. Mechanical Specifications;

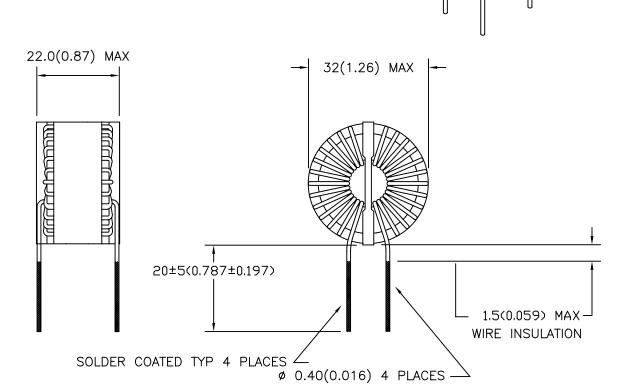

START WINDING 1 START WINDING 2



FINISH WINDING 1 FINISH WINDING 2

PREPARED BY:

D. Rund			
ENGINEER:	DWG CONTROL NO. REV	COIL	
	P-A4-12148	33.2	CMT-03110
T. Shiozawa	ACAD\MISCX\A41121481.DWG	COMMON MODE	CMI = 0.5110
QUALITY CONTROL:	ICONTENTS OF THIS DRAWING ARE	TAMURA CORPORATION OF AMERICA	MODEL SPECIFICATION
D. Kelley	PRIOR NOTICE	43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482	DIM: mm(In) SCL: 1/1 SH: 1 0F 1
APPROVED:		PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HE SEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS	
D. Kelley		THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER	

# AMEYA360 Components Supply Platform

## **Authorized Distribution Brand:**

























### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com