


size	ports		
	2	3	4
A	13.00	26.00	39.00
B	32.28 <sup>+0.25</sup> <sub>-0</sub>	45.28 <sup>+0.27</sup> <sub>-0</sub>	58.28 <sup>+0.35</sup> <sub>-0</sub>

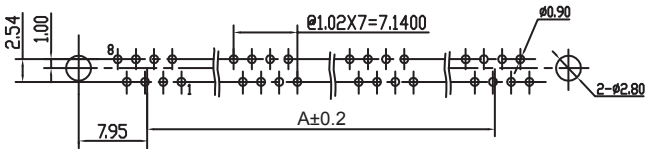

#### TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PBT  
 FLAMABILITY RATING: UL94-V0  
 COLOR: BLACK  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 METAL PIN: BRASS NI PLATED  
 QUALITY CLASS: 500 MATING CYLCES


ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40°C UP TO +85°C  
 COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL  
 CURRENT RATING: 1.5A  
 WORKING VOLTAGE: 120V AC  
 INSULATION RESISTANCE: >500 MΩ  
 WITHSTANDING VOLTAGE: 1000 VAC/min  
 CONTACT RESISTANCE: 20 mΩ max



STANDARD  
 CERTIFIED: E324776

SOLDERING  
 JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING  
 TRAY

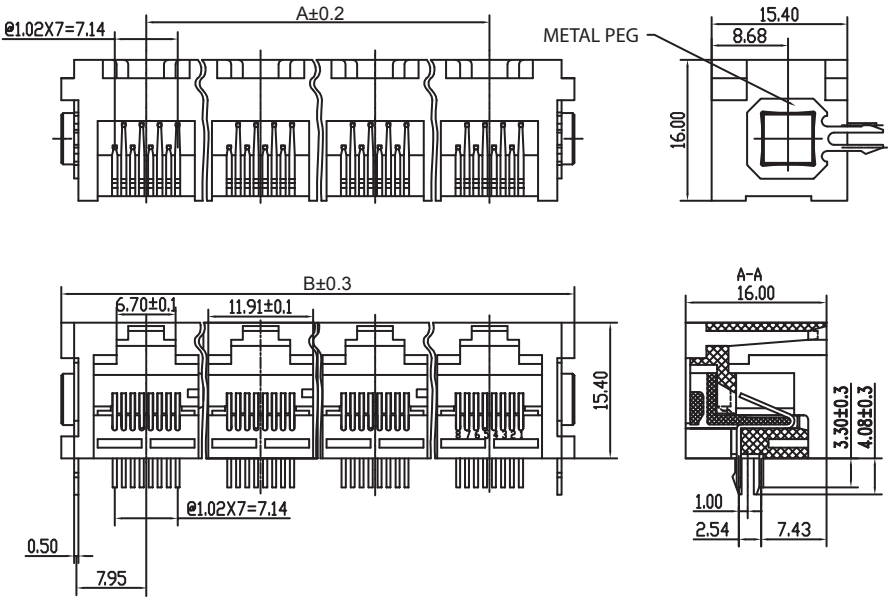

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = <math>\pm</math> 0.3</div> <div>.XX = <math>\pm</math> 0.20</div>	<div></div>		D	
G									
F									
E									
D									
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC 8P8C ASSEMBLY MODULAR JACK TAB UP	SIZE <b>A4</b>		
B					SCALE:				
A	23-JUL-14	PDF	AS		SHEET: 1/1				WERI PART NO: 615 0xx 149 521
REV	DATE	FILE	BY		DRAW: AS				

1				2				3				4				5								
<h3>Cautions and Warnings:</h3> <p>This electronic component is designed and developed with the intention for use in general electronics equipments.</p> <p>Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.</p> <p>In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.</p>																				A				
																				B				
																				C				
																				D				
RoHS Compliant								PROJECTION:				GENERAL TOLERANCE												
G								.X = +/- 0.2 .XX = +/- 0.15				UNIT: MM								DESCRIPTION: DISCLAIMER				SIZE
F												SCALE:												A4
E												SHEET: 1/1				WERI PART NO: DISCLAIMER								
D												DRAW: QL												
C				APPROVAL: JC																				
B																								
A	10-SEP-14	PDF	QL																					
REV	DATE	FILE	BY																					

1

2

3

4


5

A


B

C



D

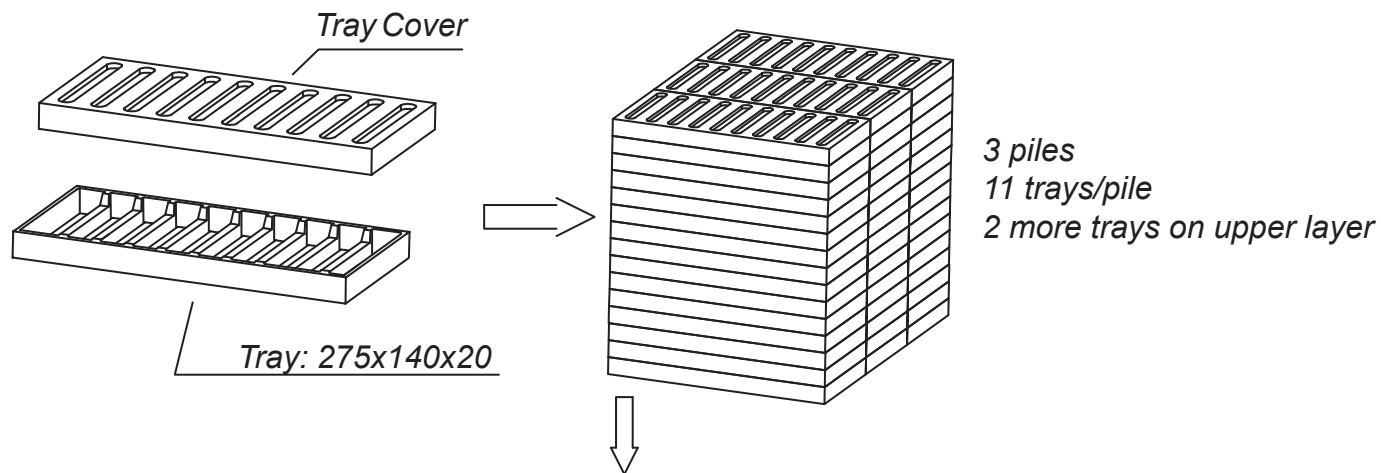

Carton size: 460x310x310  
Waterproof bag size: 450x350x570

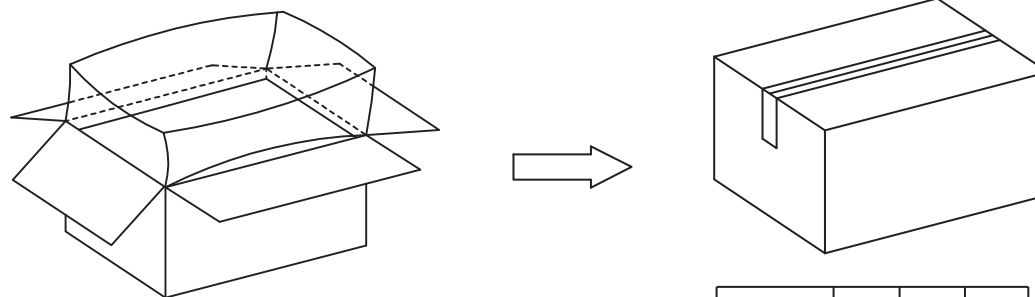

Ports	2	3	4
Pcs/Tray	40	20	20
Pcs/Carton	1400	700	700

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = <math>\pm</math> 0.2</div> <div>.XX = <math>\pm</math> 0.15</div>	<div></div> <div>WÜRTH ELEKTRONIK</div>		
G								
F								
E								
D								
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: HORIZONTAL PLASTIC 6P6C ASSEMBLY MODULAR JACK TAB UP		SIZE <div>A4</div>
B					SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 1/1	WERI PART NO: 615 0xx 149 521		
REV	DATE	FILE	BY		DRAW: AS			

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)