

SWITCHCRAFT

5555 N. Elston Ave. • Chicago, Illinois 60630
Phone: (312) 792-2700 • TWX: 910-221-5199

DW "Multi-Switch"® Switch Specifications

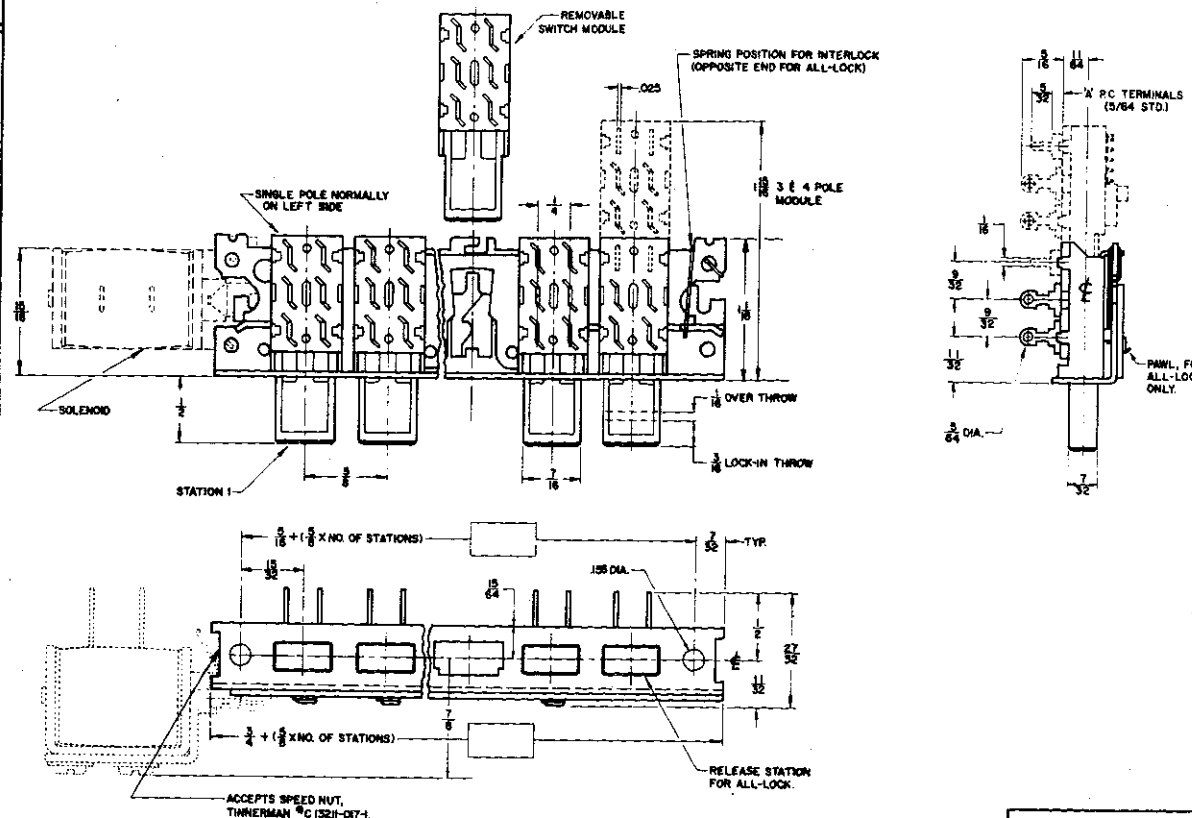
U.S. Pat. No. 3,517,140 Canadian Pat. No. 882,307

SERIES
65000THIS PRINT DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED
AND MANUFACTURED BY SWITCHCRAFT, INC., AND IS RELEASED ON A CONFIDENTIAL
BASIS FOR IDENTIFICATION PURPOSES ONLY.
WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATIONS, AND/OR PART NUMBERS
CONTAINED HEREIN WHEN CIRCUMSTANCES MAKE IT NECESSARY.

CIRCUITS	4'C	4'C																
PUSHBUTTON COLOR	Black	Black																
HOT STAMPING (Indicate Orientation)																		
FOR SWITCHCRAFT USE ONLY	REAR SECTION	A10A	A10A															
FRONT SECTION		7512	7512															
STATION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18

FOR COMPLETE DATA, REFER TO
SWITCHCRAFT DW "MULTI-SWITCH"® SWITCH CATALOG

1. NO. OF STATIONS: (Including Release Sta.) 2
2. SWITCH MOUNTING POSITION:
Horizontal ☒ Vertical ☐
3. MECHANICAL FUNCTION:
Interlock (to 12 Sta.) ☒
Non-Lock ☐
All-Lock (to 12 Sta.) ☐
Push-Lock/Push-Release ☐
Push-Lock/Push-Release (With common release) (to 12 Sta.) ☐
Special (Specify in "NOTE" Section) ☐
4. LOCK-OUT FUNCTION:
With ☒ Without ☐
5. SPECIAL FEATURES:
SOLENOID RELEASE—115 VAC, 60 Hz (Std.) ☐
Other AC Source (Specify) _____
DC Source (Specify) _____
GANGED ASSEMBLIES—No. of Rows _____
No. of Stations, each Row _____
Twin Row (2 Rows Only, Back-to-Back, Row Centers, 3/4" (Std.) ☐
Multiple Row (2 or More), Row Centers, 1 1/2" (Std.) ☐
Row Centers, Special, to 3" (Specify) _____
Banking Only (No Interaction Between Rows) ☐
Banking and Coupling (Interaction Between Rows) ☐
DW ESCUTCHEON MODULES—DW-100 ☐ DW-200 ☐
Red ☐ Black ☐ White ☐ Other (Specify) _____
6. PUSHBUTTON COLOR:
Red ☐ Black (Std.) ☒ White ☐ Other (Specify) _____
7. CIRCUIT FORMS: (Specify Above)
8. CONTACT & TERMINAL PLATING: Silver (Std.) ☒
Other ☐ (Specify) _____
9. TERMINALS: Solder Type (Std.) ☒
PC Type (Specify "A" Dim. from Catalog) ☐

"NOTES" FOR GANGED ASSEMBLY, SPECIAL SWITCH, OR OTHER SPECIAL
REQUIREMENTS, INDICATE PANEL ARRANGEMENT, ENVELOPE
SIZE, LEGEND HEIGHT, ETC., BELOW.

ASSEMBLE ITEMS 1-5 PER C-1219

GENERAL SPECIFICATIONS

FRAME, LATCH BAR, HOUSING: Steel, Iridescent, Iridite over cad. plate (MIL-P-416A).
PUSHBUTTON ACTUATOR: POLYAMIDE THERMOPLASTIC (MIL-M-20693).
INSULATION: PHENOLIC (MIL-P-3115B).
CONTACTS: BRASS, SILVER PLATED (STD).
SWITCH MODULE RATING: 3 AMP. AC, .5 AMP DC; 125V.

NOTE: RETURN THIS TRANSPARENCY OR 3 COPIES WITH INQUIRY OR ORDER.

CUSTOMER	STD.	ENG.	SS	DATE	5/26/94
CUST. NO.		SWITCH- CRAFT PART NO.	SAMPLE NO. XM-		ISSUE NO.
REF. NO.			65021K212	A	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com