

Description

- 125°C maximum total temperature operation
- Surface mount inductors designed for higher speed switch mode applications requiring lower inductance and high current
- Dual conductors allow for low inductance and high current or high inductance and lower current
- Inductance range from .047uH to 0.480uH
- Current range up to 42 Amps
- Meets UL 94V-0 flammability standard
- Ferrite core material


Applications

- Next generation microprocessors

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating ambient temperature range: -40°C to +125°C (range is application specific).
- Solder reflow temperature: +260°C max. for 10 seconds max.

RoHS

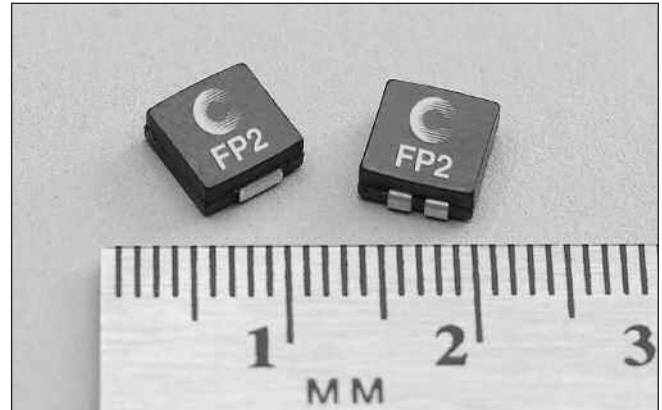

Packaging

- Supplied in tape and reel packaging, 1700 (FP2-S and FP2-D) and 950 (FP2-S200 and FP2-VXXX) per reel


Parallel Mode							
Part Number	Inductance μH (rated)	OCL ⁽¹⁾ $\mu\text{H} \pm 15\%$	I RMS ⁽²⁾ Amps	I SAT ⁽³⁾ Amps	DCR ⁽⁴⁾ Ω nom.	Height	Volt- μSec (V μS) ref. ⁽⁵⁾
Single Conductor							
FP2-S047-R	0.047	0.047	39.0	42.0	0.00024	3.00	0.75
FP2-S068-R	0.068	0.068	39.0	32.0	0.00024	3.00	0.75
FP2-S082-R	0.082	0.082	39.0	26.0	0.00024	3.00	0.75
FP2-S100-R	0.100	0.100	39.0	22.0	0.00024	3.00	0.75
FP2-S120-R	0.120	0.120	39.0	18.0	0.00024	3.00	0.75
FP2-S200-R	0.200	0.200	37.0	19.0	0.00028	5.00	0.99
FP2-V050-R	0.050	0.050	37.0	70.0	0.00028	5.00	0.99
FP2-V100-R	0.100	0.100	37.0	40.0	0.00028	5.00	0.99
FP2-V120-R	0.120	0.120	37.0	33.0	0.00028	5.00	0.99
FP2-V150-R	0.150	0.150	37.0	25.5	0.00028	5.00	0.99
Double Conductor							
FP2-D047-R	0.047	0.047	37.0	42.0	0.00026	3.00	0.75
FP2-D068-R	0.068	0.068	37.0	32.0	0.00026	3.00	0.75
FP2-D082-R	0.082	0.082	37.0	26.0	0.00026	3.00	0.75
FP2-D100-R	0.100	0.100	37.0	22.0	0.00026	3.00	0.75
FP2-D120-R	0.120	0.120	37.0	18.0	0.00026	3.00	0.75
Series Mode							
Part Number	Inductance μH ref. (rated)	OCL ⁽¹⁾ μH ref.	I RMS ⁽²⁾ Amps	I SAT ⁽³⁾ Amps	DCR ⁽⁴⁾ Ω ref.	Height	Volt- μSec (V μS) ref. ⁽⁵⁾
Double Conductor							
FP2-D047-R	0.188	0.188	16.0	21.0	0.0013	3.00	1.50
FP2-D068-R	0.272	0.272	16.0	16.0	0.0013	3.00	1.50
FP2-D082-R	0.328	0.328	16.0	13.0	0.0013	3.00	1.50
FP2-D100-R	0.400	0.400	16.0	11.0	0.0013	3.00	1.50
FP2-D120-R	0.480	0.480	16.0	9.0	0.0013	3.00	1.50

Notes: (1) Open Circuit Inductance Test Parameters: 1MHz, 0.25Vrms, 0.0Adc.
 (2) RMS current for an approximate ΔT of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.
 (3) Peak current for approximately 30% rolloff at 20°C.


(4) DCR limits 20°C.
 (5) Applied Volt-Time product (V- μS) across the inductor. This value represents the applied V- μS at 500kHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.

Mechanical Diagrams

Single Conductor

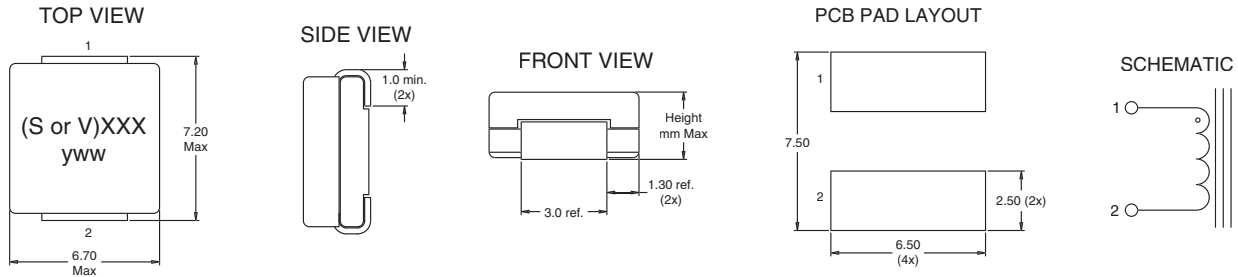


Dual Conductor

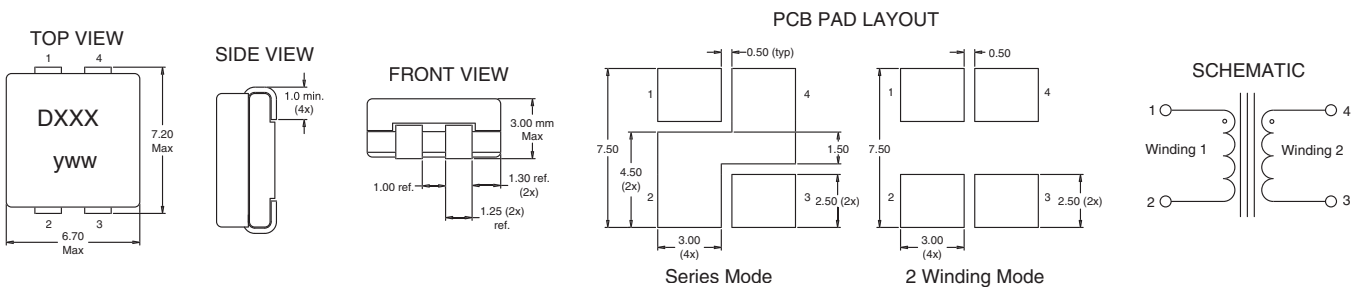





Notes: (1) Marking SXXX = S: Single Conductor Style, DXXX = D: Dual Conductor Style, XXX - last three digits of part number. Date Code: yww = y: Last Digit of year, ww: week of year.
(2) All Dimensions are in millimeters unless otherwise specified.

(3) For parallel mode operation, connect terminals 1 to 4 and 2 to 3 on PCB (use Single Conductor PCB Layout) For series mode operation, connect terminals 2 to 4 on PCB (Dual Conductor Model).

Packaging Information

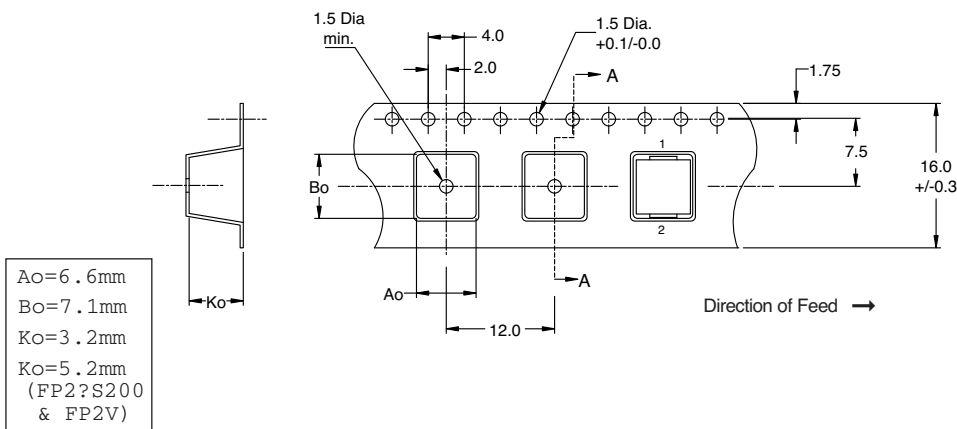


ACTUAL SIZE
FLAT-PAC'S

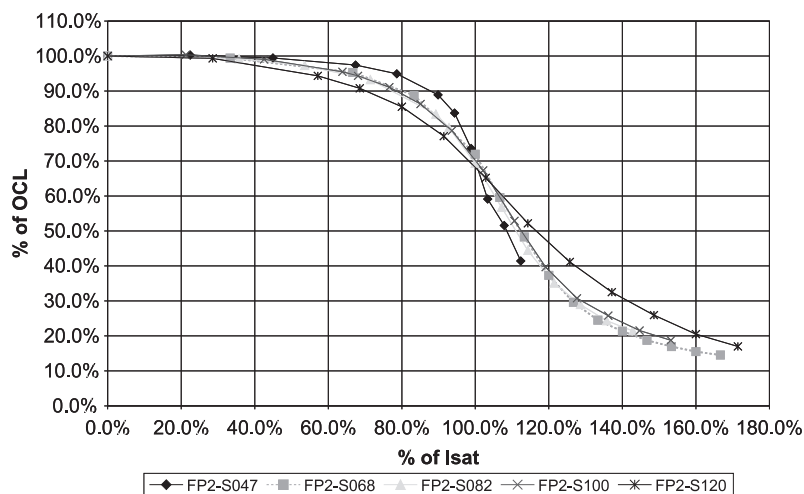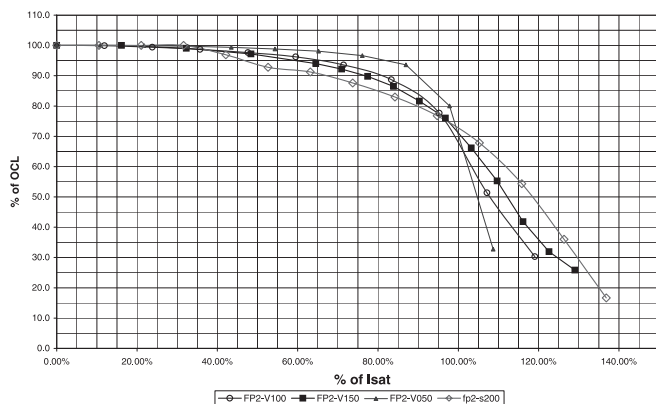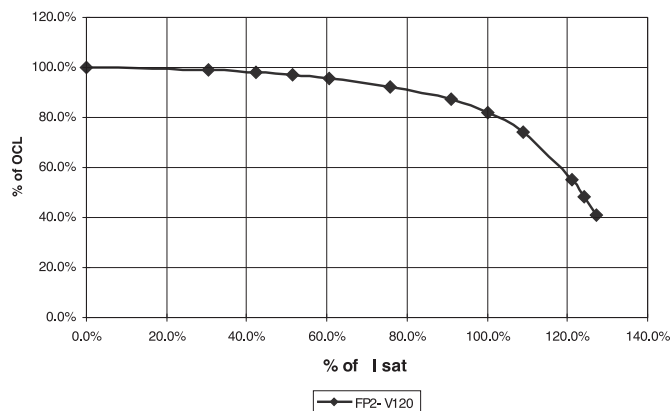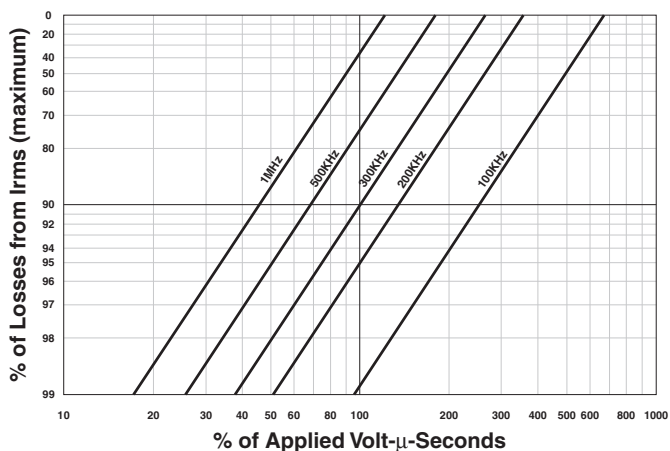**Inductance
Characteristics**
OCL vs. Isat

OCL vs. Isat

OCL vs. Isat

Core Loss
I_{RMS} DERATING WITH CORE LOSS




FLAT-PAC™
Low Profile Inductors
(Surface Mount)

PM-4110 0714

Visit us on the Web at www.eaton.com/elx

Eaton's Electrical Group

Electronics Division

1225 Broken Sound Parkway NW

Suite F

Boca Raton, FL 33487-3533

Tel: 1-561-998-4100

Fax: 1-561-241-6640

Toll Free: 1-888-414-2645

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been released, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com