


### Features and Benefits

- Thermal impedance: 0.41 °C-in<sup>2</sup>/W (@50 psi)
- Tough dielectric barrier against cut-through
- High performance film
- Designed to replace ceramic insulators

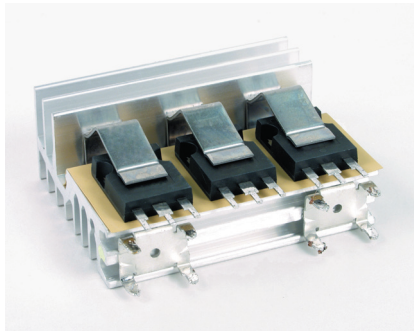

Sil-Pad K-10 is a high performance insulator. It combines special film with a filled silicone rubber. The result is a product with good cut-through properties and excellent thermal performance.

Sil-Pad K-10 is designed to replace ceramic insulators such as Beryllium Oxide, Boron Nitride and Alumina. Ceramic insulators are expensive and they break easily. Sil-Pad K-10 eliminates breakage and costs much less than ceramics.

TYPICAL PROPERTIES OF SIL-PAD K-10						
PROPERTY		IMPERIAL VALUE		METRIC VALUE		TEST METHOD
Color		Beige		Beige		Visual
Reinforcement Carrier		Polyimide		Polyimide		—
Thickness (inch) / (mm)		0.006		0.152		ASTM D374
Hardness (Shore A)		90		90		ASTM D2240
Breaking Strength (lbs/inch) / (kN/m)		30		5		ASTM D1458
Elongation (%)		40		40		ASTM D412
Tensile Strength (psi) / (MPa)		5000		34		ASTM D412
Continuous Use Temp (°F) / (°C)		-76 to 356		-60 to 180		—
ELECTRICAL						
Dielectric Breakdown Voltage (Vac)		6000		6000		ASTM D149
Dielectric Constant (1000 Hz)		3.7		3.7		ASTM D150
Volume Resistivity (Ohm-meter)		10 <sup>12</sup>		10 <sup>12</sup>		ASTM D257
Flame Rating		VTM-O		VTM-O		UL94
THERMAL						
Thermal Conductivity (W/m-K)		1.3		1.3		ASTM D5470
THERMAL PERFORMANCE vs PRESSURE						
Pressure (psi)		10	25	50	100	200
TO-220 Thermal Performance (°C/W)		2.35	2.19	2.01	1.87	1.76
Thermal Impedance (°C-in²/W) (1)		0.86	0.56	0.41	0.38	0.33
1) The ASTM D5470 test fixture was used. The recorded value includes interfacial thermal resistance. These values are provided for reference only. Actual application performance is directly related to the surface roughness, flatness and pressure applied.						


### Typical Applications Include:

- Power supplies
- Motor controls
- Power semiconductors

### Configurations Available:

- Sheet form, die-cut parts and roll form
- With or without pressure sensitive adhesive

### Building a Part Number

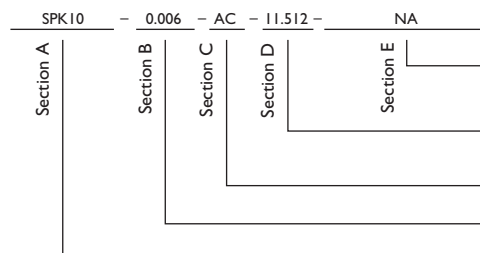

### Standard Options

◀ example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

— = Standard configuration dash number.  
11.512 = 11.5" x 12" sheets, 11.5/250 = 11.5" x 250' rolls, or 00 = custom configuration

AC = Adhesive, one side  
00 = No adhesive

Standard thicknesses available: 0.006"

SPK10 = Sil-Pad K10 Material

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).

Sil-Pad®: U.S. Patents 4,574,879; 4,602,125; 4,602,678; 4,685,987; 4,842,911 and others.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email     amall@ameya360.com  
QQ        800077892  
Skype     ameyasales1 ameyasales2

➤ Customer Service :

Email     service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email     mkt@ameya360.com