

PN2221 PN2221A
PN2222 PN2222A

NPN SILICON TRANSISTOR



TO-92 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR PN2221, PN2222 series types are silicon NPN epitaxial planar transistors designed for small signal, general purpose switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Power Dissipation
Operating and Storage Junction Temperature

SYMBOL	PN2221	PN2221A	UNITS
	PN2222	PN2222A	
V _{CBO}	60	75	V
V _{CEO}	30	40	V
V _{EBO}	5.0	6.0	V
I _C		800	mA
P _D		625	mW
T _J , T _{stg}	-65 to +150		°C

ELECTRICAL CHARACTERISTICS: (T_A=25°C)

SYMBOL	TEST CONDITIONS
I _{CBO}	V _{CB} =50V
I _{CBO}	V _{CB} =60V
I _{CEV}	V _{CE} =60V, V _{EB} =3.0V
I _{EBO}	V _{EB} =3.0V
BV _{CBO}	I _C =10μA
BV _{CEO}	I _C =10mA
BV _{EBO}	I _E =10μA
V _{CE(SAT)}	I _C =150mA, I _B =15mA
V _{CE(SAT)}	I _C =500mA, I _B =50mA
V _{BE(SAT)}	I _C =150mA, I _B =15mA
V _{BE(SAT)}	I _C =500mA, I _B =50mA

PN2221		PN2221A		UNITS
PN2222		PN2222A		
MIN	MAX	MIN	MAX	
-	10	-	-	nA
-	-	-	10	nA
-	-	-	10	nA
-	10	-	10	nA
60	-	75	-	V
30	-	40	-	V
5.0	-	6.0	-	V
-	0.4	-	0.3	V
-	1.6	-	1.0	V
-	1.3	-	1.2	V
-	2.6	-	2.0	V

h _{FE}	V _{CE} =10V, I _C =0.1mA	20	-	35	-	
h _{FE}	V _{CE} =10V, I _C =1.0mA	25	-	50	-	
h _{FE}	V _{CE} =10V, I _C =10mA	35	-	75	-	
h _{FE}	V _{CE} =10V, I _C =150mA	40	120	100	300	
h _{FE}	V _{CE} =1.0V, I _C =150mA	20	-	50	-	
h _{FE}	V _{CE} =10V, I _C =500mA (PN2221, PN2222)	20	-	30	-	
h _{FE}	V _{CE} =10V, I _C =500mA (PN2221A, PN2222A)	25	-	40	-	
f _T	V _{CE} =20V, I _C =20mA, f=100MHz (except PN2222A)	250	-	250	-	MHz
f _T	V _{CE} =20V, I _C =20mA, f=100MHz (PN2222A)	-	-	300	-	MHz
C _{ob}	V _{CB} =10V, f=100kHz	-	8.0	-	8.0	pF
t _{on}	V _{CC} =30V, I _C =150mA, I _B =15mA	-	35	-	35	ns
t _{off}	V _{CC} =30V, I _C =150mA, I _{B1} =I _{B2} =15mA	-	285	-	285	ns


R1 (30-January 2012)

PN2221 PN2221A
PN2222 PN2222A

NPN SILICON TRANSISTOR



TO-92 CASE - MECHANICAL OUTLINE

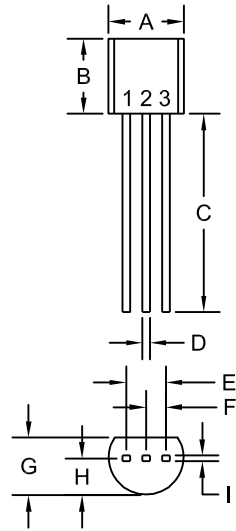

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING: FULL PART NUMBER

R1 (30-January 2012)

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com