

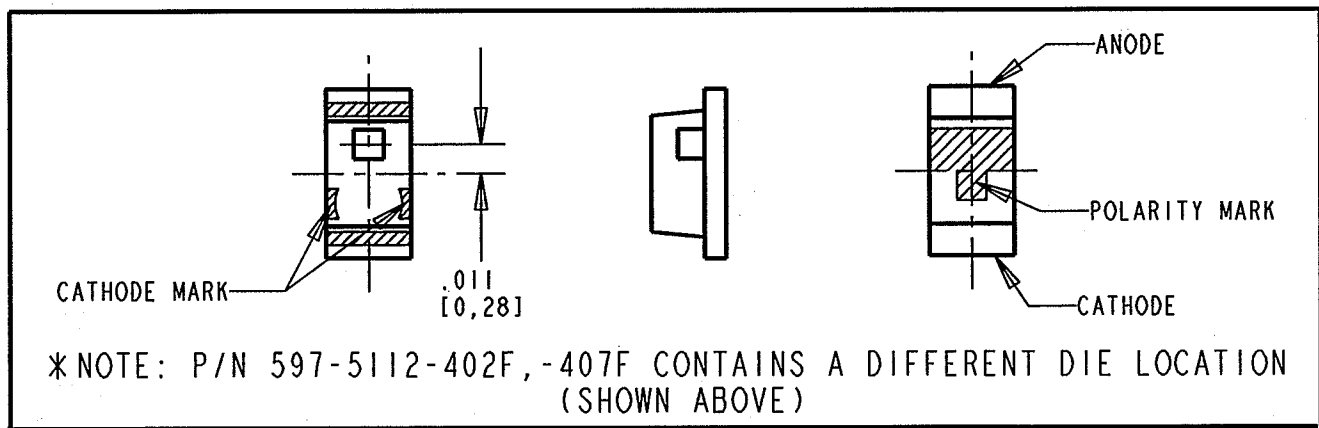
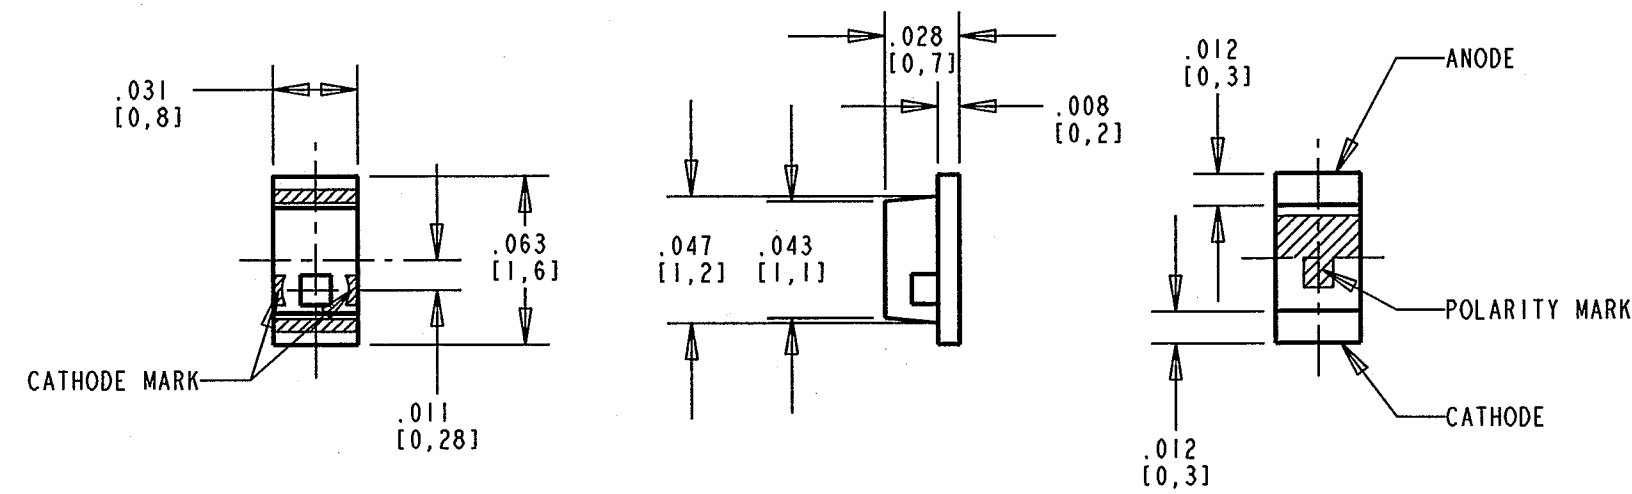
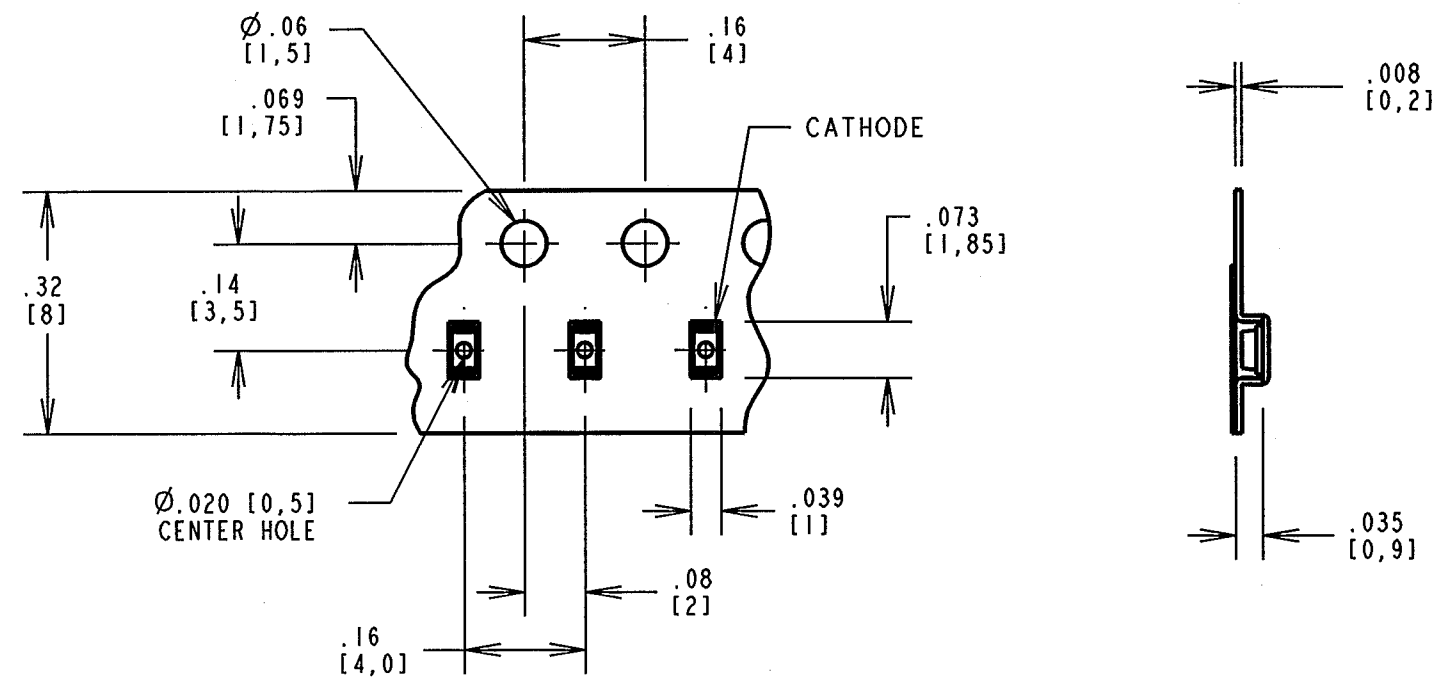




DIALIGHT PART NO.				OPERATING CHARACTERISTICS AT 25° C AMBIENT									
				I _f (mA)	FORWARD VOLTAGE (V)		LUMINOUS INTENSITY (mcd)		REVERSE CURRENT (μA)		PEAK WAVELENGTH (nm)	DOMINANT WAVELENGTH (nm)	VIEWING ANGLE (DEGREES)
					TYP	MAX	MIN	TYP	MAX	V _R =			
597-5004-407F, -402F	BRIGHT RED	AlInGaP	WHITE DIFFUSED	20	1.9	2.4	25	50	100	5 V	635	626	152
597-5112-407F, -402F	RED	AlGaAs		20	1.7	2.3	7.0	11.7	100	4 V	660	647	152
597-5203-407F, -402F	ORANGE	GaAsP		20	2.2	2.8	2.0	3.4	100	4 V	605	606	152
597-5213-407F, -402F	BRIGHT ORANGE	AlInGaP		20	1.9	2.4	25	65	100	5 V	609	605	152
597-5223-407F, -402F	BRIGHT YELLOW	AlInGaP		20	1.9	2.4	25	65	100	5 V	592	590	152
597-5312-407F, -402F	GREEN	GaP		20	2.1	2.8	3.8	6.4	100	4 V	560	567	152
597-5412-407F, -402F	YELLOW-GREEN	GaP		20	2.1	2.8	7.0	11.7	100	4 V	570	572	152

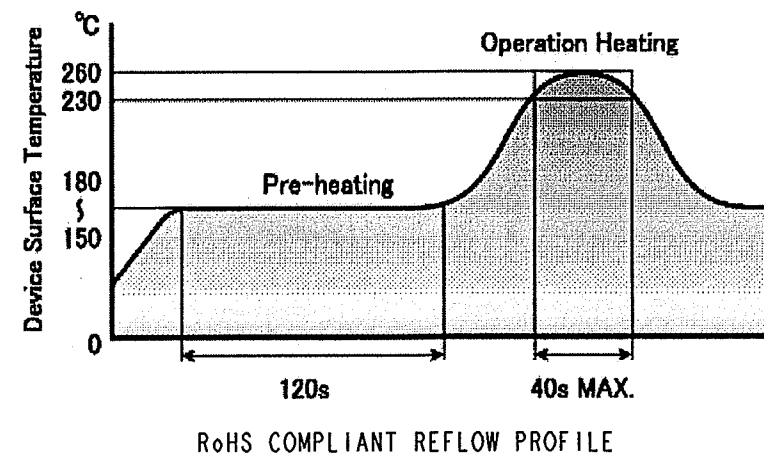

ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

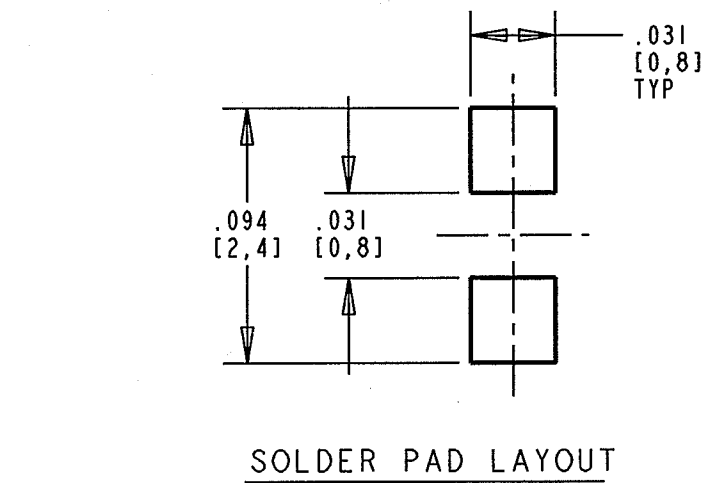

TAPE & REEL SPECIFICATION
NO SCALE

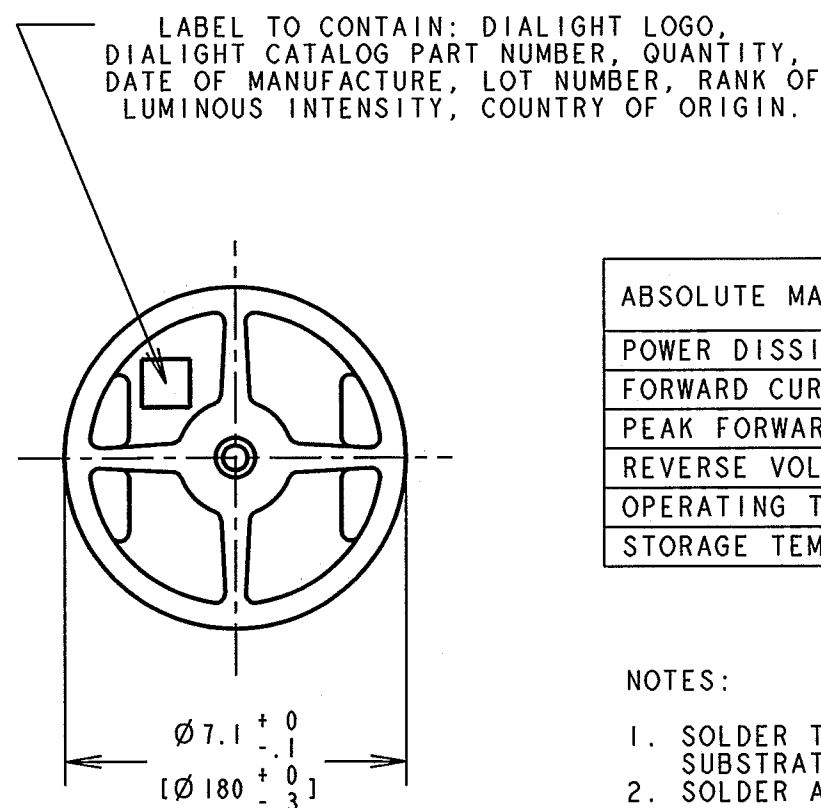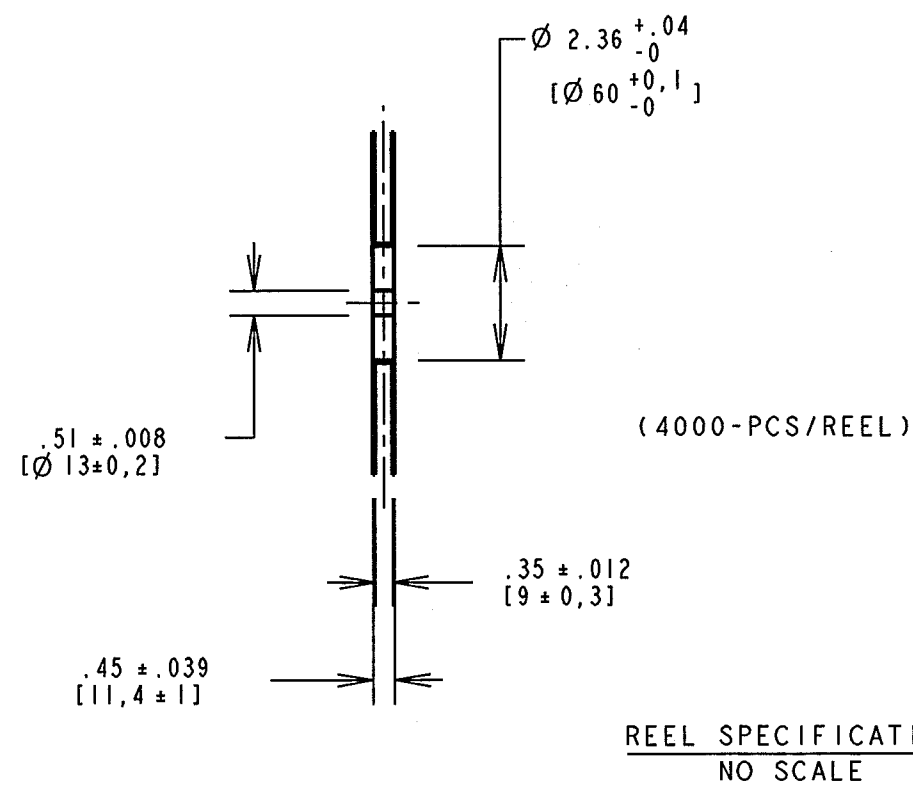

ABSOLUTE MAXIMUM RATINGS AT 25° C AMBIENT	BRIGHT RED	BRIGHT ORANGE	BRIGHT YELLOW	RED	ORANGE	GREEN	YELLOW-GREEN	UNITS
POWER DISSIPATION	81	57.5	70	70	70	70	70	mW
FORWARD CURRENT	30	25	25	25	25	25	25	mA
PEAK FORWARD CURRENT (≤ 1/20 DUTY CYCLE T _w ≤ 1 msec)	100	60	60	60	60	60	60	mA
REVERSE VOLTAGE	5	4	4	4	4	4	4	V
OPERATING TEMPERATURE	-40 TO +85	-30 TO +85	-30 TO +85	-30 TO +85	-30 TO +85	-30 TO +85	-30 TO +85	°C
STORAGE TEMPERATURE	-40 TO +100	-40 TO +100	-40 TO +100	-40 TO +100	-40 TO +100	-40 TO +100	-40 TO +100	°C

NOTES:

- SOLDER TERMINALS: GOLD (Au) PLATED, OVER NICKEL (Ni), COPPER (Cu) SUBSTRATE ON FR-4 LAMINATE
- SOLDER ADHERANCE: EACH PAD PER MIL-STD-202E, METHOD 208C.
- TAPE AND REEL AS PER EIA STANDARD 481-1, WITH CATHODE TOWARD SPROCKET.
- PARTS PACKAGED ON 180 mm DIA REEL, 8 mm TAPE, 4000/REEL (SEE SKETCH).
- TAPE AND REEL LEDS MAY REQUIRE RE-TAPING AFTER TWELVE MONTHS.
- DIALIGHT PART NUMBER: 597-5XXX-407F AND 597-XXXX-402F
- THIS PRODUCT IS Pb FREE. IT IS IN COMPLIANCE WITH THE EUROPEAN UNION'S ROHS DIRECTIVE. EACH BAG AND REEL IS MARKED WITH THE ROHS COMPLIANT LABEL P/N 9100-117-0852-99 OR EQUIVALENT
- THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: DRAWING SCALE	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-16413	G
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	SMT LED
FRACTIONS: ±1/64	RoHS COMPLIANT	
DECIMALS (.XX): ±.01	MATERIAL	
DECIMALS (.XXX): ±.005		
DECIMALS (.XXXX): ±.0005		
ANGLES: ±1°		
FINISH:		
FSCM 83330		
SHEET 1 OF 1	FAMILY TABLE:	

Dialight 1501 ROUTE 34 SOUTH
FARMINGDALE, NJ 07727

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com