

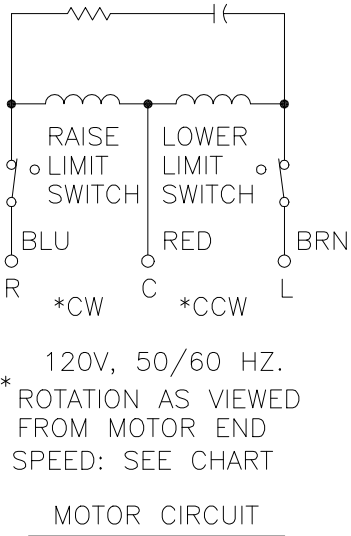


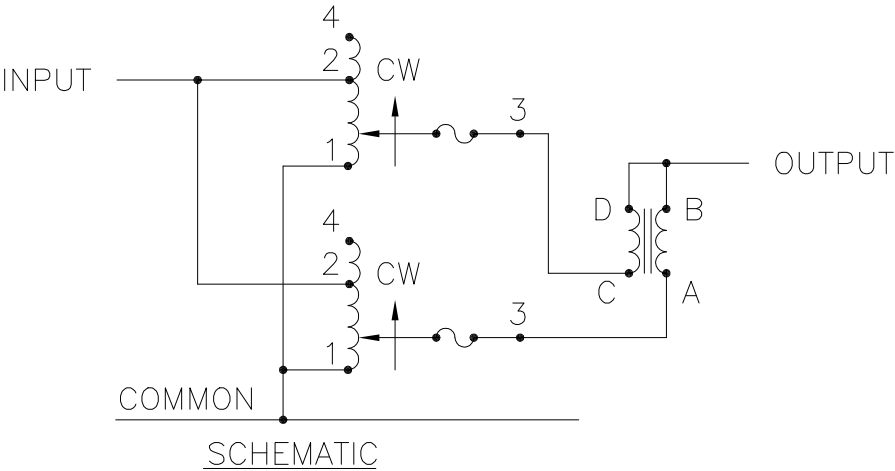

SPEED (SECONDS)	MODEL NUMBER
5	5M6011CT-2P
15	15M6011CT-2P
30	30M6011CT-2P
60	60M6011CT-2P

SPECIFICATIONS														
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS							
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END							
							INPUT		OUTPUT					
SINGLE PHASE PARALLEL	120	50/60	0-120	120	14.4	CW	1-4		1-B					
			0-140	120	16.8	CW	1-2		1-B					
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX ±.01 HOLES .12 ANGLES 1° DRAFT 1-1/2°			UNITS IN [mm]		TITLE: SPEC. CONTROL DRAWING VARIABLE MOTORIZED XFMR. TYPE: M6011CT-2P									
MATERIAL:			ALL DIMENSIONS APPLY AFTER PLATING											
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			DRAWN BY RAU		DATE 2/10/00		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE	
			CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO. 83008		DWG. SIZE		DWG. NO.	
			ENGINEER		DATE		SCALE .5=1		SHEET 1 OF 1		D		032-6224	

Authorized Distribution Brand :

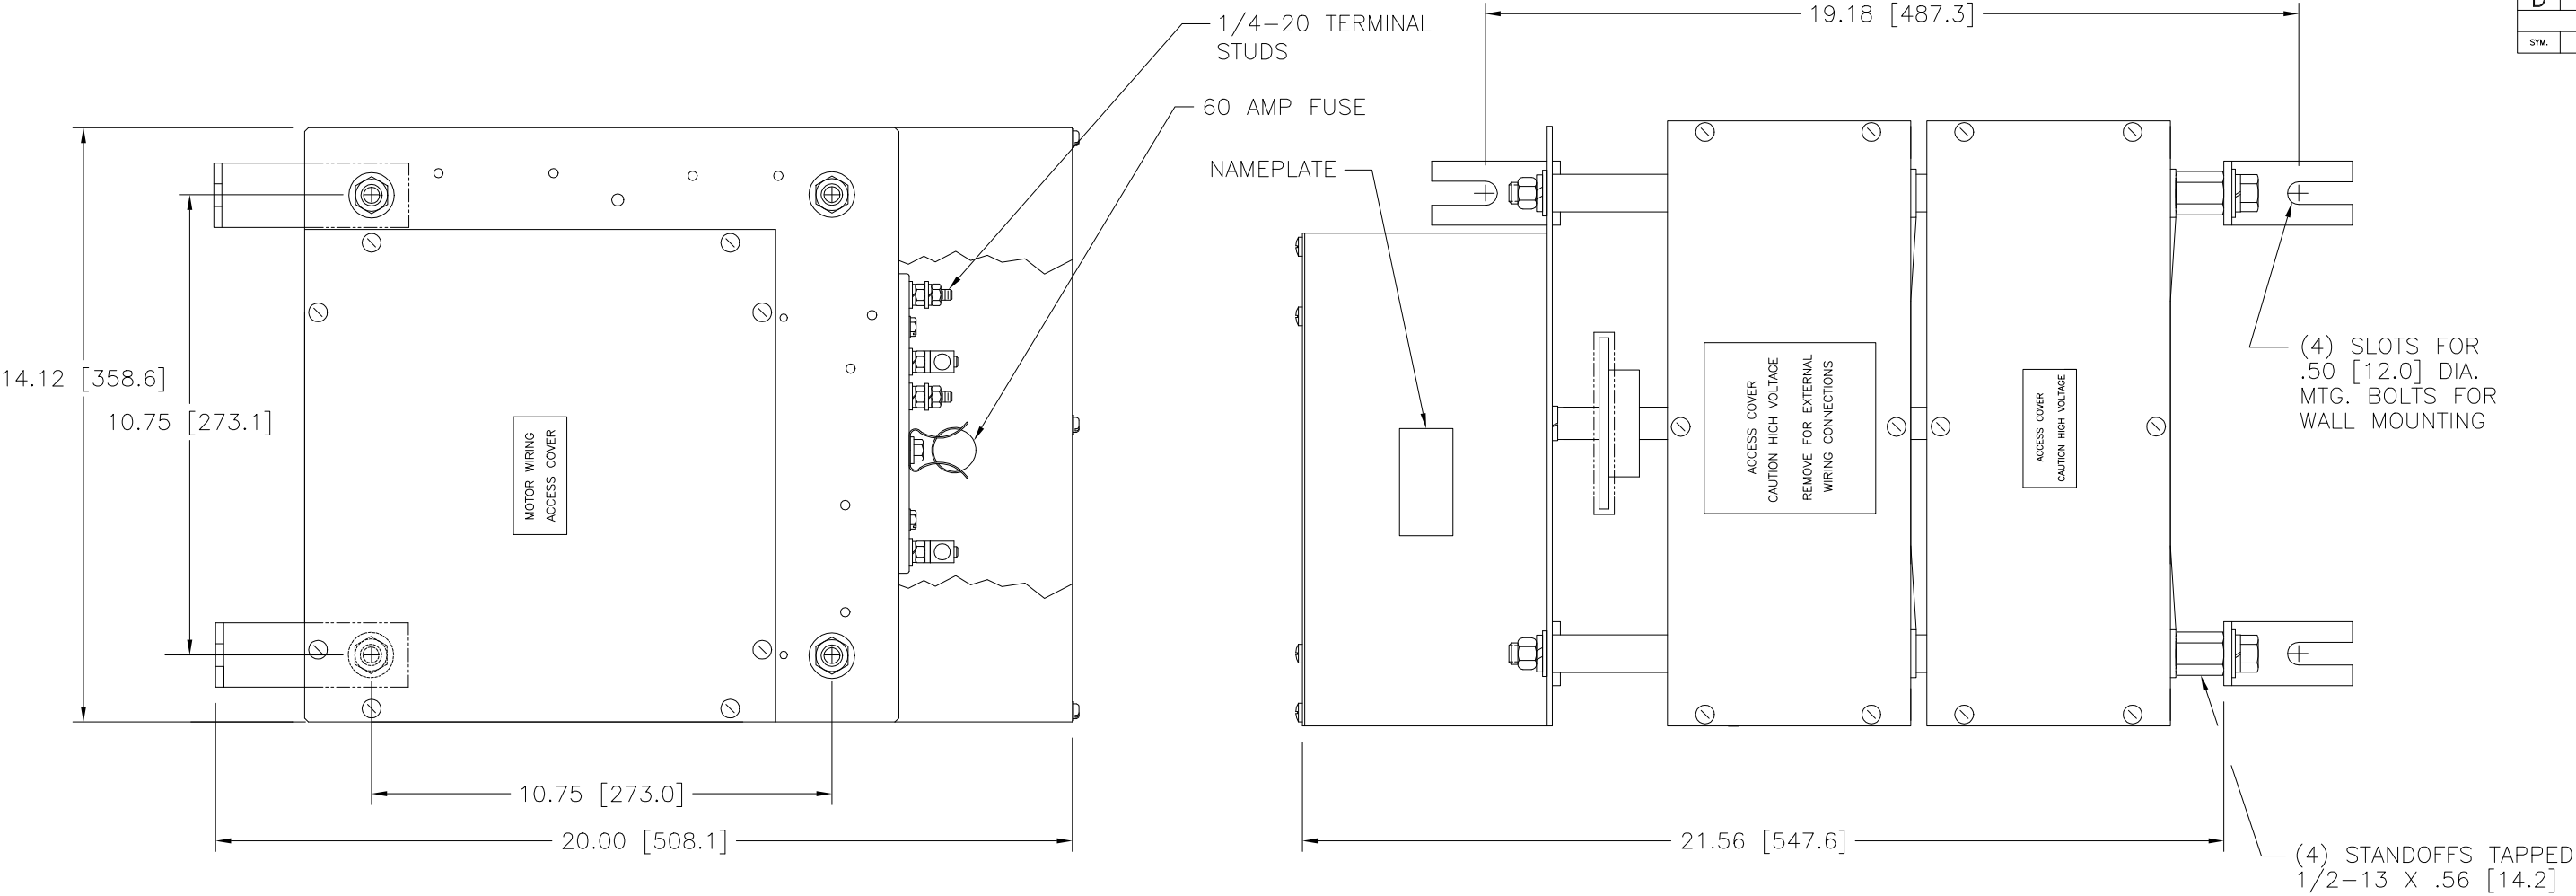

Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com