
High Temperature Ceramic EuroBlocks™




Suitable for use in high temperature applications up to 600°C (1112°F). Applications include hot melt glue guns, furnaces, heaters, process equipment and machinery. Terminal blocks are offered with mounting holes for panel mounting or free floating applications.



- Compact, space saving
- Tubular screw clamp
- Free float or panel mount
- Temperature range: -40°C (-40°F) to 600°C (1112°F)
- Standard color: white
- Material
  Housing: Steatite
  Clamp: Brass
  Screws: Zinc plated steel

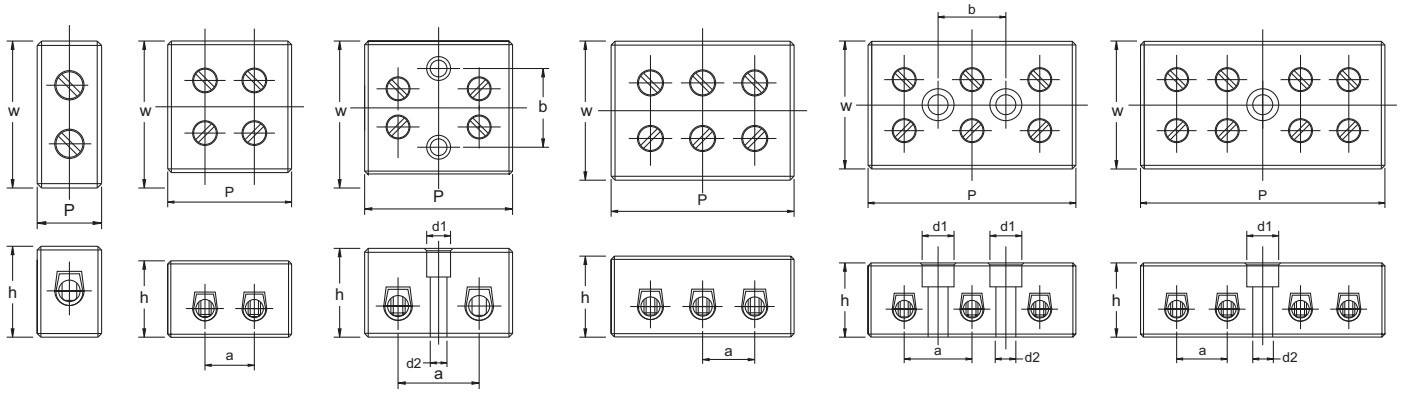
New CB6/4H*



	CB4	CB6	CB16
			
	Available in 1-3 poles.	*Available in 1-4 poles.*	*Available in 2-3 poles.*
Insulation Material	Ceramic	Ceramic	Ceramic
Approvals	c SP us · IEC 60947-7-1 · c UL us E220514	c SP us · IEC 60947-7-1 · c UL * us E220514	c SP us · IEC 60947-7-1 · c UL us E220514
Wire Range	24-12 AWG · .5-2.5mm² · 24-12 AWG	22-10 AWG · .5-4mm² · 22-10 AWG	20-6 AWG · .5-2.5mm² · 18-6 AWG
Voltage Rating	300V · 800 V · 300V	300V · 800 V · 300V	300V · 800 V · 300V
Current Rating	30 A · 24 A · 20 A	40 A · 32 A · 30 A	76 A · 57 A · 65 A
Torque	6 lb-in. · 0.4 Nm · 6 lb-in.	6 lb-in. · 0.5 Nm · 6 lb-in.	12 lb-in. · 1.2 Nm · 12 lb-in.

No. of Poles	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
1 (free floating)	CB4/1	50	CB6/1	50		
2 (free floating)	CB4/2	50				
2 (with mounting holes)	CB4/2H	50	CB6/2H	50	CB16/2H	50
3 (free floating)	CB4/3	50				
3 (with mounting holes)	CB4/3H	50	CB6/3H	50	CB16/3H	50
4 (with mounting hole)	–	–	CB6/4H*	50	–	–

Design A **Design B** **Design C** **Design D** **Design E** **Design F**



Type Cat. No.	Design Type	No. of Poles	Stripping Length	P	a	b	w	h	d1	d2	Recommended Mounting Screw
CB4/1	A	1	6	11	-	-	23	18.5	-	-	-
CB4/2	B	2	6	18	7.3	-	23	18.5	-	-	-
CB4/2H	C	2	6	24	13	14.6	23	18.5	6	3.5	M3 x 16
CB4/3	D	3	6	25	7.3	-	23	18.5	-	-	-
CB4/3H	E	3	6	36	13	13	23	18.5	6	3.5	M3 x 16
CB6/1	A	1	6	12	-	-	25.5	19.5	-	-	-
CB6/2H	C	2	6	26	15	12.6	25.5	19.5	6	3.5	M3 x 16
CB6/3H	E	3	6	41	15	15	25.5	19.5	6	3.5	M3 x 16
CB16/2H	C	2	8.5	31	17	16.5	28	23.2	6	3.5	M3 x 20
CB16/3H	E	3	8.5	48	17	17	28	23.2	6	3.5	M3 x 20
CB6/4H	F	4	6	39	8	–	20	16	6	3.5	M3 x 16

*UL Recognition in progress for CB6/4H

Note: All dimensions are shown in mm, to convert to inches please divide by 25.4.

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

AMEYA360
Components Supply Platform

Authorized Distribution Brand :

Website :

Welcome to visit www.ameya360.com

Contact Us :

- ### Address :

  401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
  Minhang District, Shanghai , China

- ### Sales :

  Direct +86 (21) 6401-6692

  Email amall@ameya360.com

  QQ 800077892

  Skype ameyasales1 ameyasales2

- ### Customer Service :

  Email service@ameya360.com

- ### Partnership :

  Tel +86 (21) 64016692-8333

  Email mkt@ameya360.com