



USB 3.0 type A


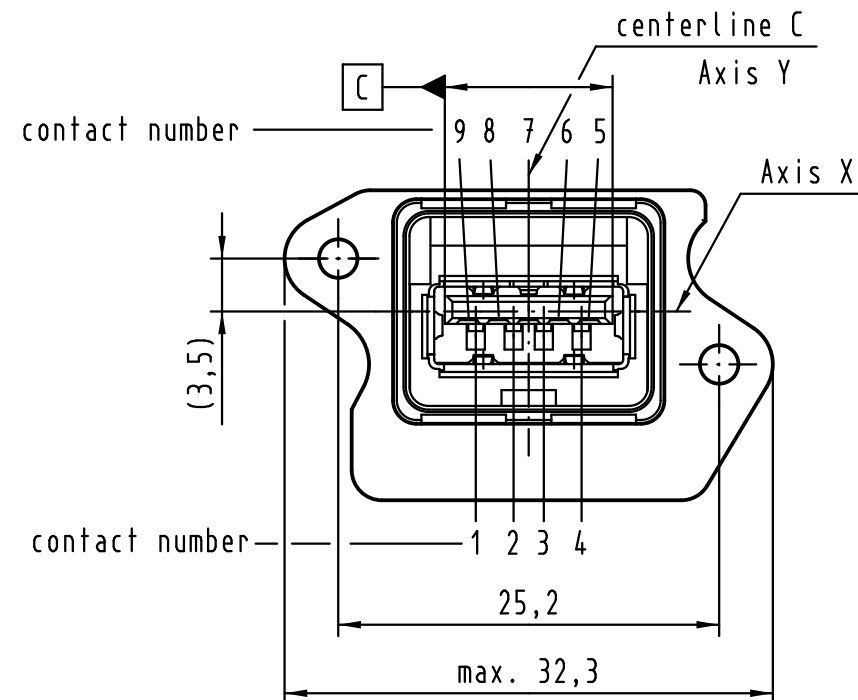


Panel Cutting


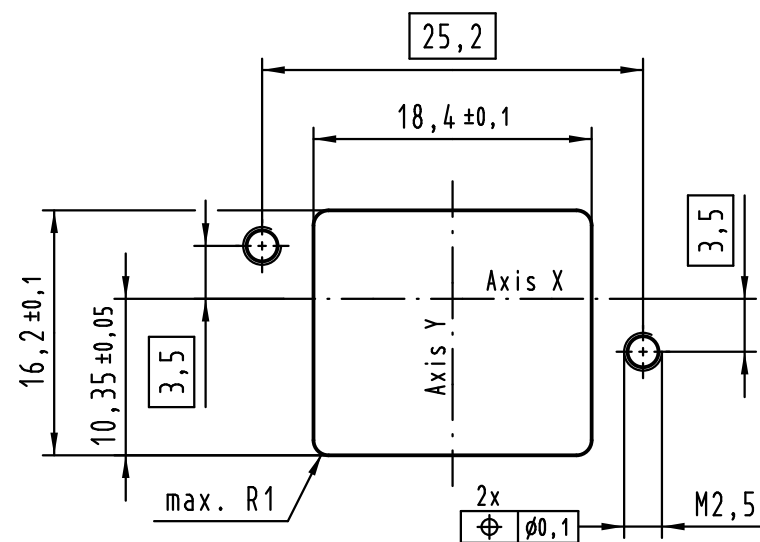


Connector pitch on panel:
Axis X = 27mm and Axis Y = 21mm

A-A

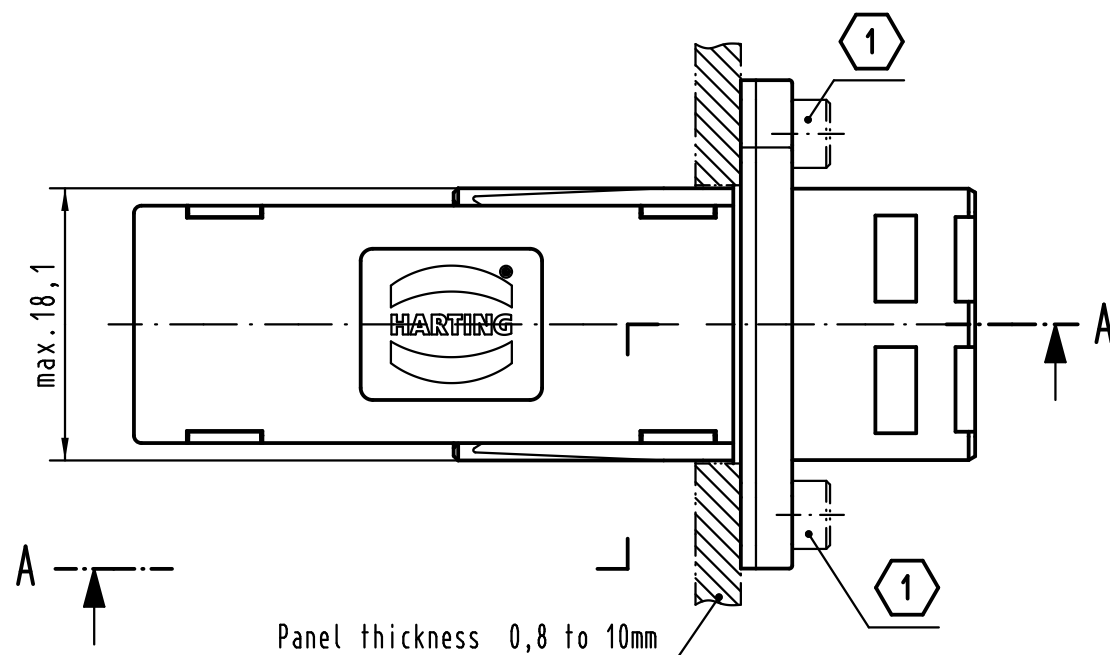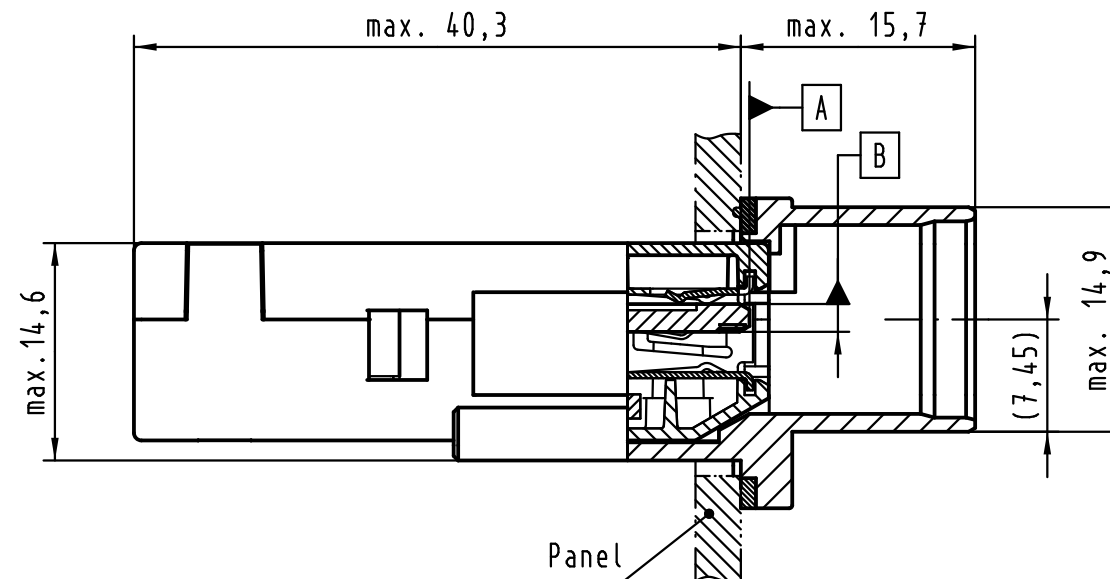

USB 3.0 type A

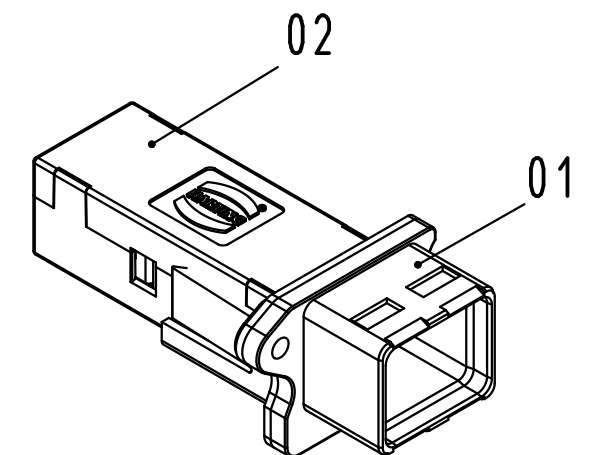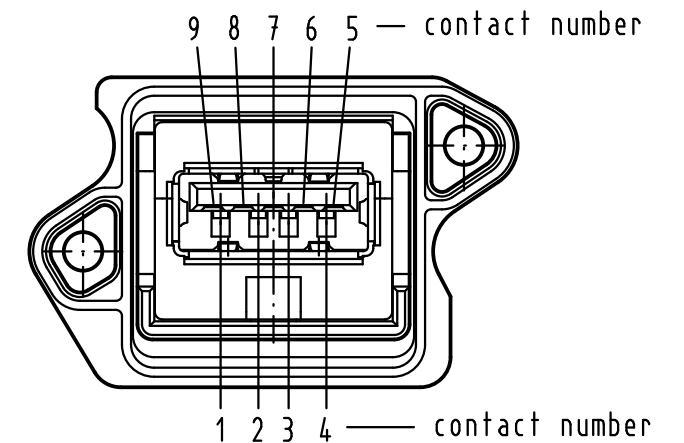

further information see: DS 09 45 623 02 02

loading-plan

V Bus	1	1
D-	2	2
D+	3	3
GND	4	4
StdA_SSRX-	5	5
StdA_SSRX+	6	6
GND_DRAIN	7	7
StdA_SSTX-	8	8
StdA_SSTX+	9	9
Shield	Shell	Shell

1 Screwing 2x M2,5 screws between 0,3 - 0,5Nm, screw acc. to ISO 4762
order please separately

References A, B and C acc. to USB specification 2.0, www.usb.org

02	1	USB 3.0 HIFF Bulkhead coupler type A-A	09 45 545 1902
01	1	HPP housing compact	09 45 545 0028
pos.	number	description	part-number
		All Dimensions in mm Original Size DIN A 3	Techn. Character.
			Detail.
			Insp.
			Stand.
			Maßstab/Scale
			2:1
		HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP	HARTING PushPull Compact panel feed through USB 3.0 Type A
		36124 Mod.	TB 09 45 245 1904 Sub.
		Dat.	Name
			Blatt/ page

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com