


Fast Recovery Epitaxial Diode (FRED)

ECO-PAC 2

Preliminary Data Sheet

V_{RSM} V	V_{RRM} V	Typ
1200	1200	DSEI 2x161-12P



Symbol	Conditions	Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$	270	A
I_{FAVM}^*	$T_C = 70^\circ\text{C}$; rectangular; $d = 0.5$	128	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	1200	A
	$t = 8.3\text{ ms}$ (60 Hz), sine	1320	A
	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	1080	A
	$t = 8.3\text{ ms}$ (60 Hz), sine	1170	A
I^2dt	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	7200	A ² s
	$t = 8.3\text{ ms}$ (60 Hz), sine	7100	A ² s
	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	5800	A ² s
	$t = 8.3\text{ ms}$ (60 Hz), sine	5700	A ² s
T_{VJ}		-40 ... +150	°C
T_{VJM}		150	°C
T_{stg}		-40 ... +125	°C
V_{ISOL}	50/60 Hz, RMS	$t = 1\text{ min}$	2500 V ~
	$I_{ISOL} \leq 1\text{ mA}$	$t = 1\text{ s}$	3600 V ~
M_d	Mounting torque (M4)	1.5-2.0	Nm
		14-18	lb.in.
Weight	typ.	20	g

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
I_R	$T_{VJ} = 25^\circ\text{C}$; $V_R = V_{RRM}$			12 mA
	$T_{VJ} = 25^\circ\text{C}$; $V_R = 0.8 \cdot V_{RRM}$			3 mA
	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0.8 \cdot V_{RRM}$			60 mA
V_F	$I_T = 200\text{ A}$; $T_{VJ} = 25^\circ\text{C}$			1.9 V
V_{TO}	For power-loss calculations only			1.16 V
r_T				3 mΩ
R_{thJC}	per Diode			0.29 K/W
R_{thCH}	per Diode		0.2	K/W
I_{RM}	$I_F = 100\text{ A}$; $-di_F/d_t = 200\text{ A}/\mu\text{s}$; $V_R = 100\text{ V}$		48	A
	$L \leq 0.05\text{ mH}$; $T_{VJ} = 100^\circ\text{C}$			
t_{rr}	$I_F = 1\text{ A}$; $-di_F/d_t = 400\text{ A}/\mu\text{s}$; $V_R = 30\text{ V}$; $T_{VJ} = 25^\circ\text{C}$		40	ns
d_S	Creeping distance on surface	11.2		mm
d_A	Creeping distance in air	11.2		mm
a	Max. allowable acceleration			50 m/s ²

* I_{FAVM} rating includes reverse blocking losses at T_{VJM} ; $V_R = 0.8 V_{RRM}$; $d = 0.5$

IXYS reserves the right to change limits, test conditions and dimensions.

$$I_{FAVM} = 2 \times 128\text{ A}$$

$$V_{RRM} = 1200\text{ V}$$

$$t_{rr} = 40\text{ ns}$$

Features

- 2 independent FRED in 1 package
- Isolation voltage 3600 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- Very short recovery time
- Soft recovery behaviour


Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling
- Low noise switching
- Small and light weight

Dimensions in mm (1 mm = 0,0394")

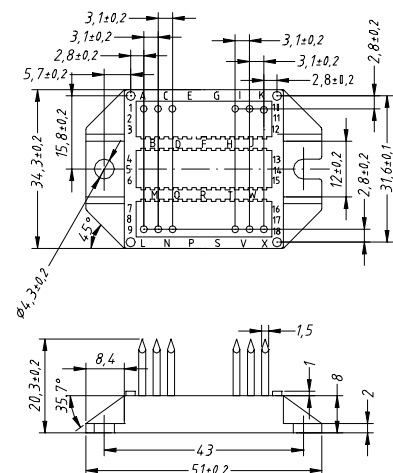

135

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com