



### DIMENSIONS (mm)

Unspecified Tolerances +/- 0.25mm


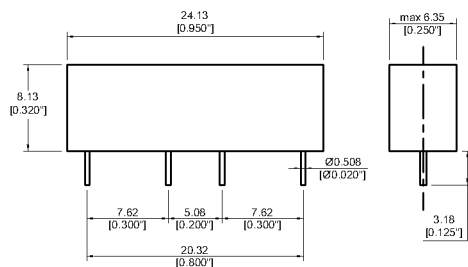


### LAYOUT 76L

Top View / Grid: 2.54mm (0.100")



### MARKING



| Coil Data at 20 °C | Conditions | Min | Typ | Max | Unit |
|--------------------|------------|-----|-----|-----|------|
| Coil resistance    |            | 200 | 220 | 240 | Ohm  |
| Coil voltage       |            |     | 5   |     | VDC  |
| Rated power        |            |     | 114 |     | mW   |
| Pull-In voltage    |            |     |     | 2   | VDC  |
| Drop-Out voltage   |            | 0,5 |     |     | VDC  |

| Contact Data 85              | Conditions                                                        | Min | Typ | Max   | Unit  |
|------------------------------|-------------------------------------------------------------------|-----|-----|-------|-------|
| Contact rating               | Any DC combination of V & A not to exceed their individual max.'s |     |     | 100   | W     |
| Switching voltage            | DC or Peak AC                                                     |     |     | 1.000 | V     |
| Switching current            | DC or Peak AC                                                     |     |     | 1     | A     |
| Pulsed carry current         | DC or Peak AC<br>5ms after coil excitation for 50ms max.          |     |     | 3     | A     |
| Carry current                | DC or Peak AC<br>100% Duty Cycle                                  |     |     | 2,5   | A     |
| Contact resistance static    | Measured with 40% overdrive                                       |     |     | 150   | mOhm  |
| Insulation resistance        | RH <45 %, 100 V test voltage                                      | 10  |     |       | GOhm  |
| Breakdown voltage (40-50 AT) | according to IEC 255-5                                            | 2   |     |       | kV DC |
| Operate time incl. bounce    | measured with 40% overdrive                                       |     |     | 1,1   | ms    |
| Release time                 | measured with no coil excitation                                  |     |     | 0,1   | ms    |
| Capacitance                  | @ 10 kHz across open switch                                       |     | 0,2 |       | pF    |

| Special Product Data             | Conditions             | Min | Typ                     | Max | Unit  |
|----------------------------------|------------------------|-----|-------------------------|-----|-------|
| Dielectric Strength Coil/Contact | according to IEC 255-5 | 2   |                         |     | kV DC |
| Case color                       |                        |     | black                   |     |       |
| Housing material                 |                        |     | Nylon 6/6               |     |       |
| Sealing compound                 |                        |     | Polyurethan             |     |       |
| Connection pins                  |                        |     | Copper alloy tin plated |     |       |

| Environmental data    | Conditions                  | Min | Typ          | Max | Unit |
|-----------------------|-----------------------------|-----|--------------|-----|------|
| Shock                 | 1/2 sine wave duration 11ms |     |              | 50  | g    |
| Vibration             | from 10 - 2000 Hz           |     |              | 20  | g    |
| Operating temperature |                             | -20 |              | 70  | °C   |
| Storage temperature   |                             | -20 |              | 90  | °C   |
| Soldering temperature | wave soldering max. 5 sec.  |     |              | 260 | °C   |
| Washability           |                             |     | fully sealed |     |      |

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)