


2mm SINGLE LED TOP VIEW CIRCUIT BOARD INDICATOR
(SUBMINATURE SOLID STATE LAMPS)

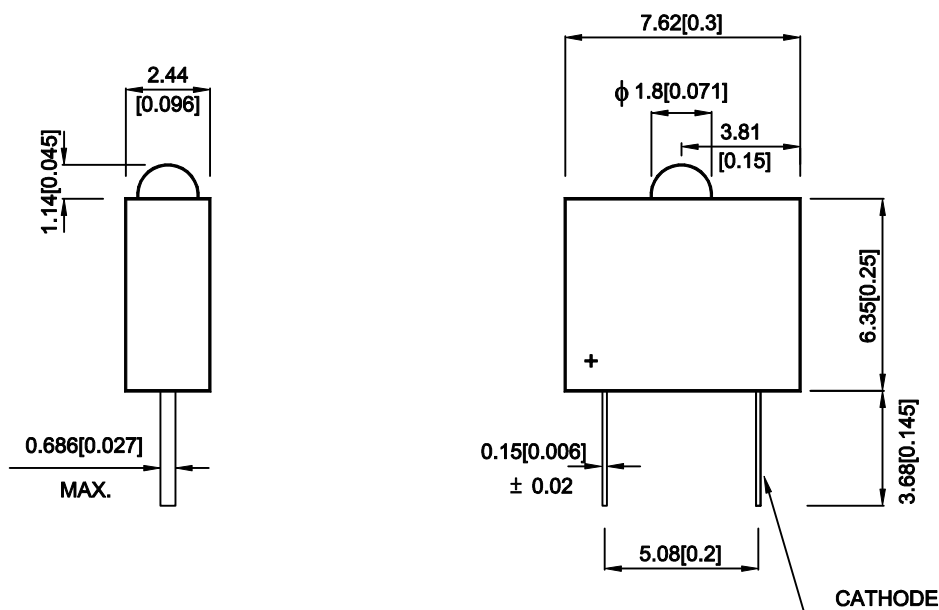

UNIT : MM[INCH]

TOLERANCE : $\pm 0.25[\pm 0.01]$ UNLESS OTHERWISE NOTED.

Dice	Condition	Peak Emission Wavelength			UNIT
		Min.	Typ.	Max.	
HIGH EFFICIENCY RED (GaAsP/GaP)	$I_F = 20\text{mA}$	-	625	-	nm

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=14V		Viewing Angle
			Min.	Typ.	2 θ 1/2
AM2520EJ/ID14V	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	6	10	60°

APPROVED:

J.Lu

CHECKED:

J. Chao

DRAWN :

L.N. Sheu

SCALE :

3 : 1

DATA NO. : F6756

V.1

DATE : JUN/28/2000

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com