

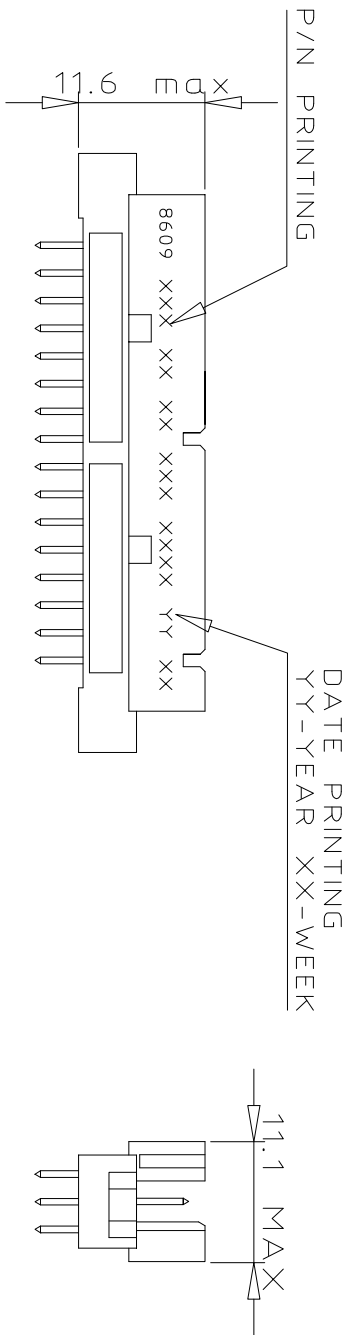


DIMENSIONS

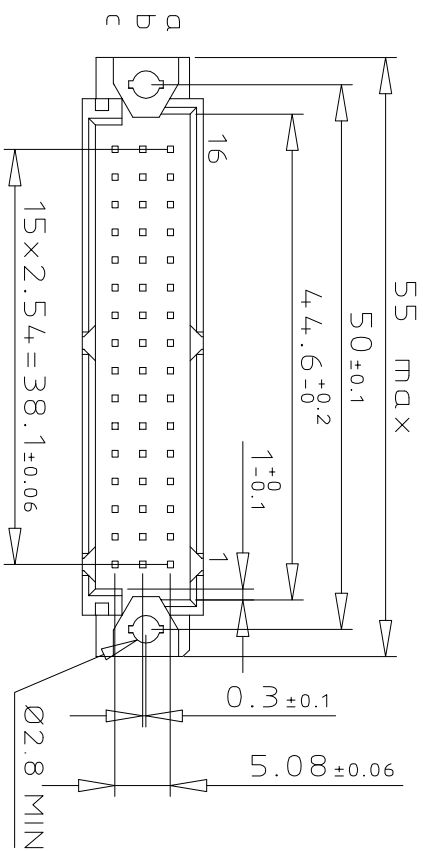


TERMINATION

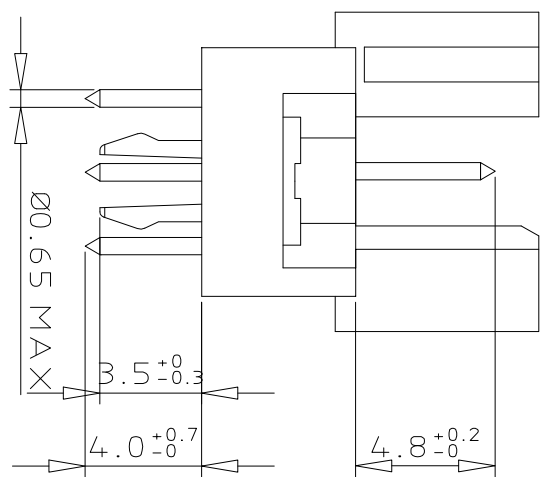

ORDERING INFORMATION

SERIES	8609	3	4	8	7	6	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS											
ROW a	b	c									
ROW a - c											
NO. OF CONTACTS											
TYPE OF INSULATOR											
3 ROW MALE INSULATOR											
METHOD OF MOUNTING											
REVERSE MOUNTING - STYLE R/2											
TERMINATION											
STRAIGHT SPILL											
OPTIONS											
NO OPTION											
WITH HARPOONS											
PERFORMANCE CLASS											
DIN 41612 CLASS 3											
DIN 41612 CLASS 2											
DIN 41612 CLASS 1											
AS PER MIL C 55302 / JSS 50808											
PITCH PER ROW											
2.54 mm											
LEAD FREE VERSION											

PCB LAYOUT

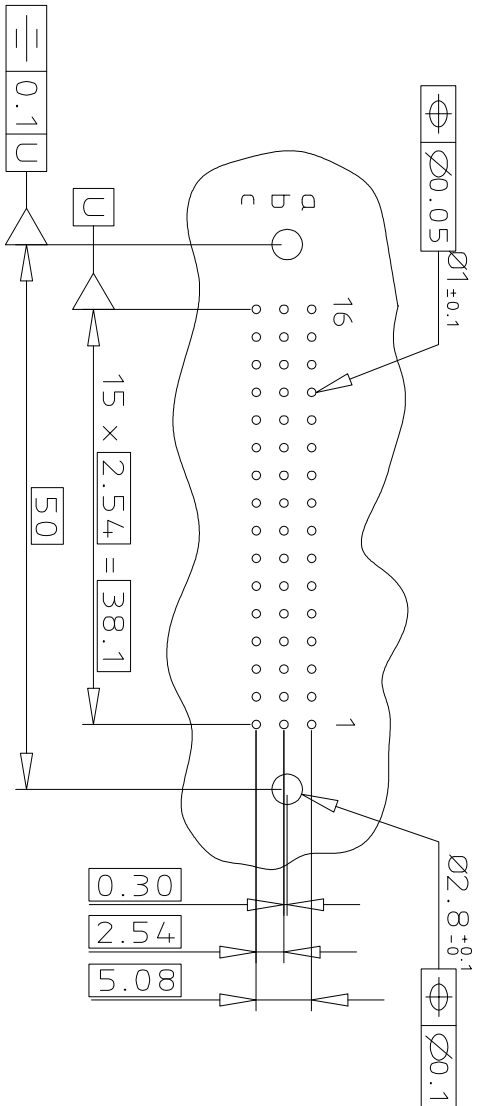

Copyright FCI

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 8609			
l'tr	ec'n	no	dr	date		tolerances unless otherwise specified				title			
A	104-.0063	MINI	2004-.09-.17	angles		linear		0.X	±0.1	DIN REVERSE HEADER			
B	105-.0042	MINI	2005-.05-.19					0.XX	±0.1	DIN 41612 STYLE R/2			
C	106-.0061	MINI	2006-.05-.31	0°±2°		0.XXX		±0.1	scale 3:2		dwg no		
D	108-.0146	KR	2008-10-21	dr		MINI K V		2004-.09-.17			sheet 1 of 1		
						eng'r RAKHEE G		2004-.09-.17			size		
						chr KESAVAN R		2008-10-21			A3		
						qppd KESAVAN R		2008-10-21			type		
sheet index	revision	sheet	1							Product Customer Drawing			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com