

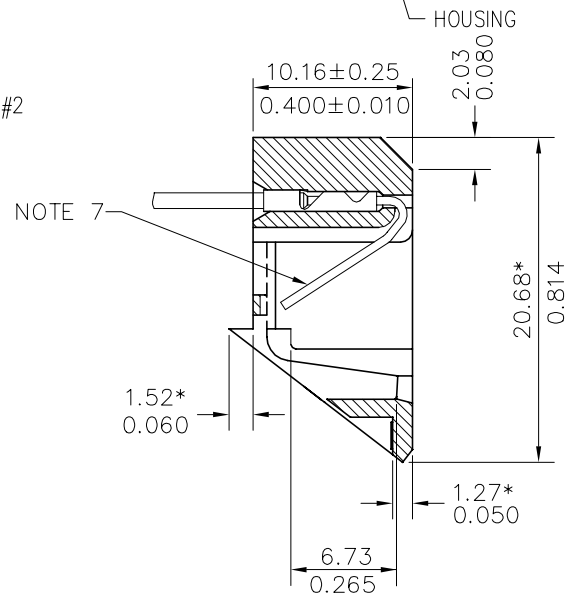
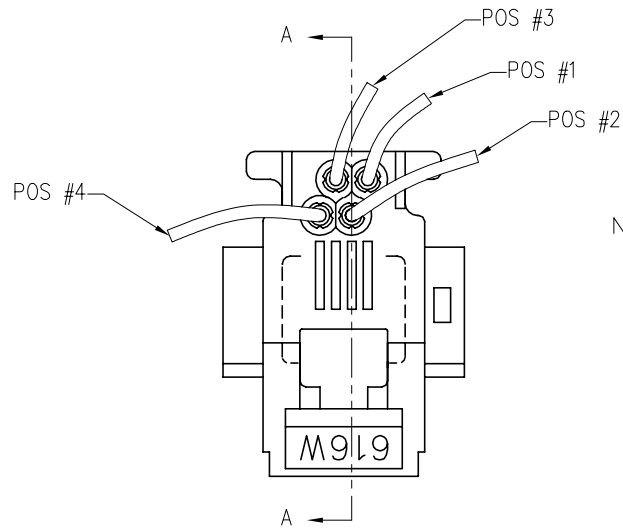
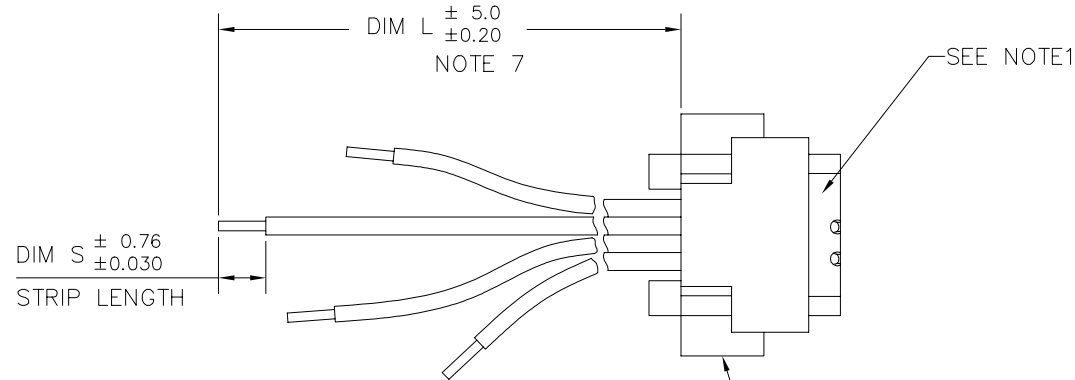


PRODUCT NO.
SEE TABLE OF SHEET 2

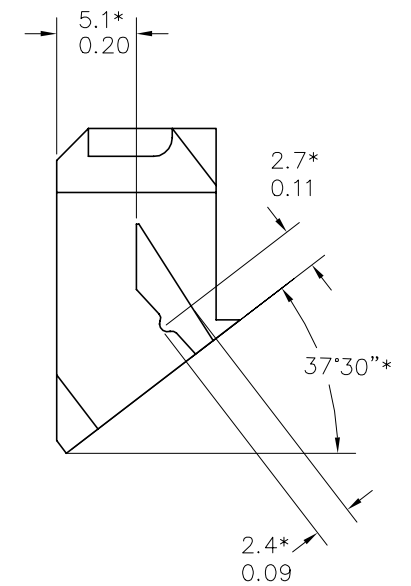

SECTION A-A

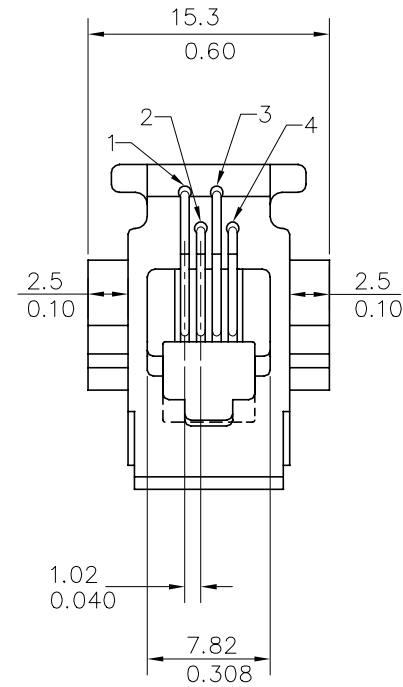

mat'l. code				surface ☒ ISO1302 ☒ tolerance ISO1101 ISO406			product family MOD JACK						
ltn		ecn nodr		date			tolerances unless otherwise specified		title				
V	T90289	TC	08/04/99	angle		0.X±0.3			616W MOD JACK ASSY WITH STRIPPED ENDS				
W	T90356	TC	08/04/99			0.XX±0.15							
X	N05-0064	YS	03/04/05			0°±2'					scale 2.0		
Y	N08-0097	SH MM	09/25/08	dr	T.CHIEN	09/07/93			dwg no		sheet 1 of 2	size	
AA	ELX-N-010663	SH MM	3/14/12	engr	T.CHIEN	09/07/93			76361		A4		
				chr	J.TSAO	09/08/93							
				appd	J.TSAO	09/08/93							
sheet		revision		AA	AA								
index		sheet		1	2								

PRODUCT NO.	POS. NO.	WIRE COLOR	DIM L	WIRE STYLE	HOUSING MATERIAL	STRIP LENGTH DIM S	SPLICE FINISH	GOLDED WIRE	REMARK
76361-010 76361-010LF	1 2 3 4	RED WHITE GREEN BLACK	78.00/3.071 190.00/7.480 190.00/7.480 78.00/3.071	E	ABS UL94V-0	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	FOR 76361-010LF STRIPPED END MUST BE SOLDER DIPPED WITH PURE TIN
76361-014 76361-014LF	1 2 3 4	RED WHITE GREEN BLACK	45.00/1.771 180.00/7.087 180.00/7.087 45.00/1.771	B	ABS UL94V-0 GRAY	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	
76361-015 76361-015LF	1 2 3 4	RED WHITE GREEN BLACK	40.00/1.575 180.00/7.087 180.00/7.087 40.00/1.575	B	ABS UL94V-0 GRAY	3.00/0.118	UNPLATED	5u" Au + high performance lubricant ⑩	
76361-031 76361-031LF	1 2 3 4	RED WHITE GREEN BLACK	64.00/2.520 218.00/8.590 218.00/8.590 64.00/2.520	B	ABS UL94V-0 GRAY	4.00/0.157	UNPLATED	5u" Au + high performance lubricant ⑩	

NOTES:

- MAT'L HOUSING: SEE TABLE.
- MAT'L GOLD WIRE: PHOSPHOR BRONZE ALLOY UNS C51000.

3. INSULATED WIRE:

STYLE A: 27 AWG. 7 STRANDS OF TINNED COPPER WIRE, PVC INSULATION.

STYLE B: 27 AWG. 7 STRANDS OF TINNED COPPER WIRE, TOP COATED WITH TIN PVC INSULATION.

STYLE C: 26 AWG. 7 STRANDS OF TINNED COPPER WIRE, TOP COATED WITH TIN PVC INSULATION.

STYLE D: 26 AWG. 7 STRANDS OF TINNED COPPER WIRE, PVC INSULATION.

STYLE E: FLEXIBLE WIRE. 0.08mm DIA. X 19 CONDUCTOR BARE COPPER WIRE. UNPLATED IN SOLD STRAND. PVC INSULATION.

- FOR FUNCTIONAL MECHANICAL AND VISUAL REQUIREMENTS. SEE PRODUCT SPECIFICATION BUS-12-003
- TERMINAL MAT'L: BRASS ALLOY, PLAIN.
- ALL DIM MARKED WITH ASTERISKS ARE REF. FOR MOUNTING.
- WHEN A 4-POSITION PLUG IS INSERTED INTO THE HSG. THE CONTACT WIRE MAY NOT PROTRUDE OUT OF THE REAR WALL OF HSG.

8. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

9. IF LF P/N THE PACKAGING MEETS GS-14-920 SPECIFICATION.

⑩ EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

mat'l. code				surface  tolerance		projection 		product family			
				ISO1302		ISO1101 ISO406		MOD JACK			
ltr		ecn		nodr		date		tolerances unless otherwise specified		title	
V		T90289		TC		08/04/99		angle 		0.X±0.3	
W		T90356		TC		08/04/99		mm 		616W MOD JACK ASSY	
X		N05-0064		YS		03/04/05		0'±2"		WITH STRIPPED ENDS	
Y		N08-0097		SH MM		09/25/08		dr		T.CHIEN 09/07/93	
AA		ELX-N-010663		SH MM		3/14/12		enr		T.CHIEN 09/07/93	
								chr		J.TSAO 09/08/93	
								appd		J.TSAO 09/08/93	
sheet		revision									
index		sheet									

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com