

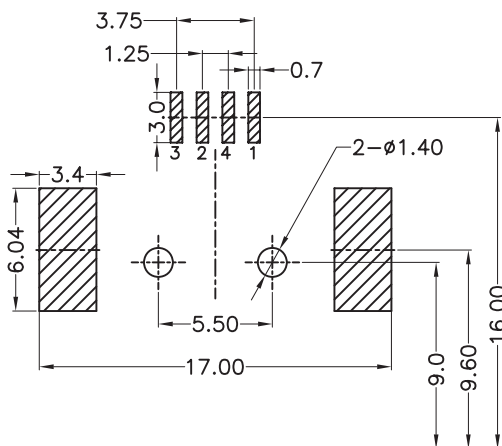
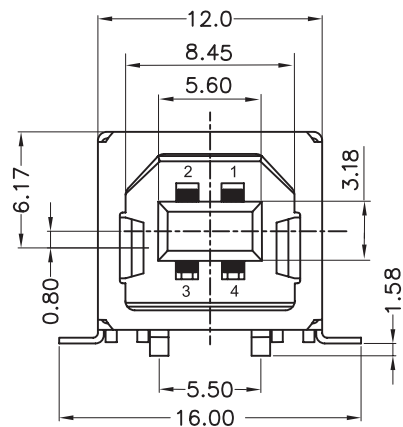


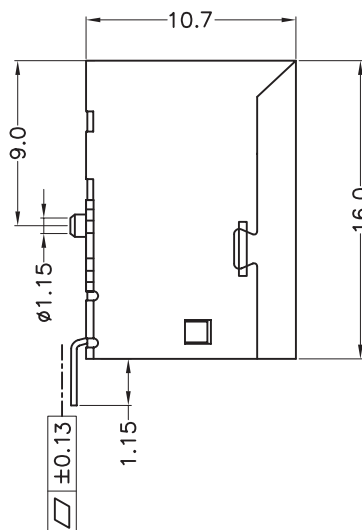

PCB LAYOUT - COMPONENT VIEW

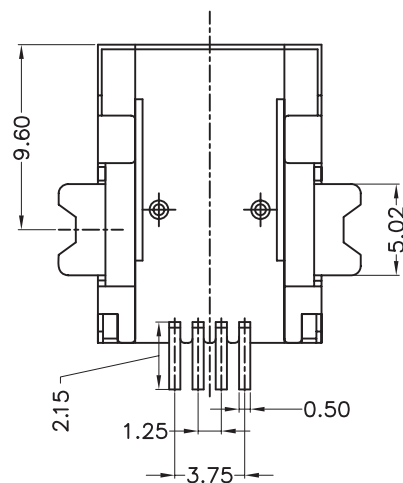

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: NYLON 6T
 FLAMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOYS
 CONTACT TYPE: STAMPED
 CONTACT PLATING: SELECTIVE GOLD
 SHIELDING: BRASS NI PLATED
 QUALITY CLASS: 1500 MATING CYCLE

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.5A Max
 WORKING VOLTAGE: 30V
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 750V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX


STANDARD
 CERTIFIED: E323964 / MODEL NUMBER 614/629-B

SOLDERING
 REFLOW PROCESS ONLY

PACKAGING
 TAPE & REEL

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/2





DRAW: MIKE

DESCRIPTION: USB 2.0 BFEMALE RIGHT ANGLE SMD TYPE

WERI PART NO: 629 104 161 21

SIZE

A4

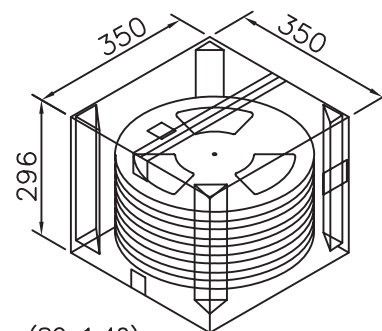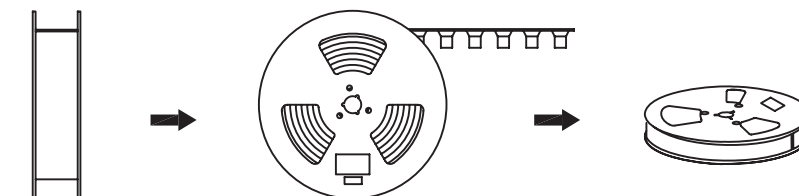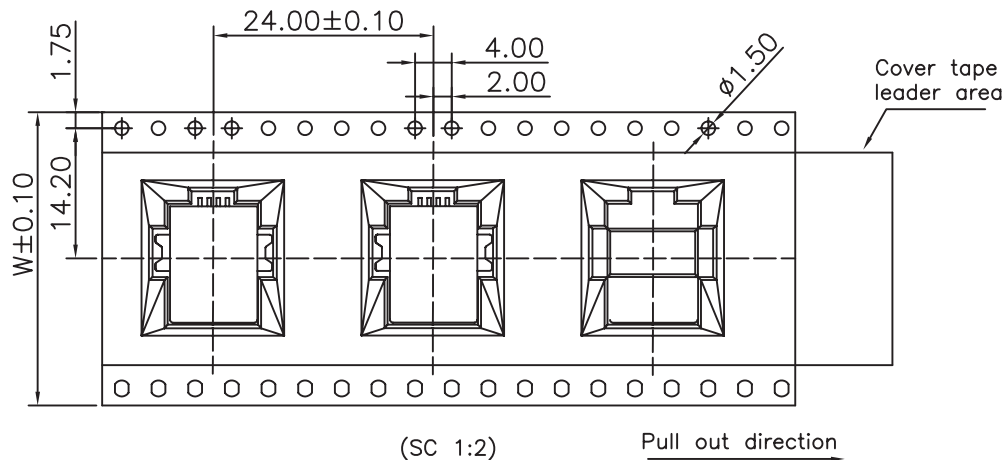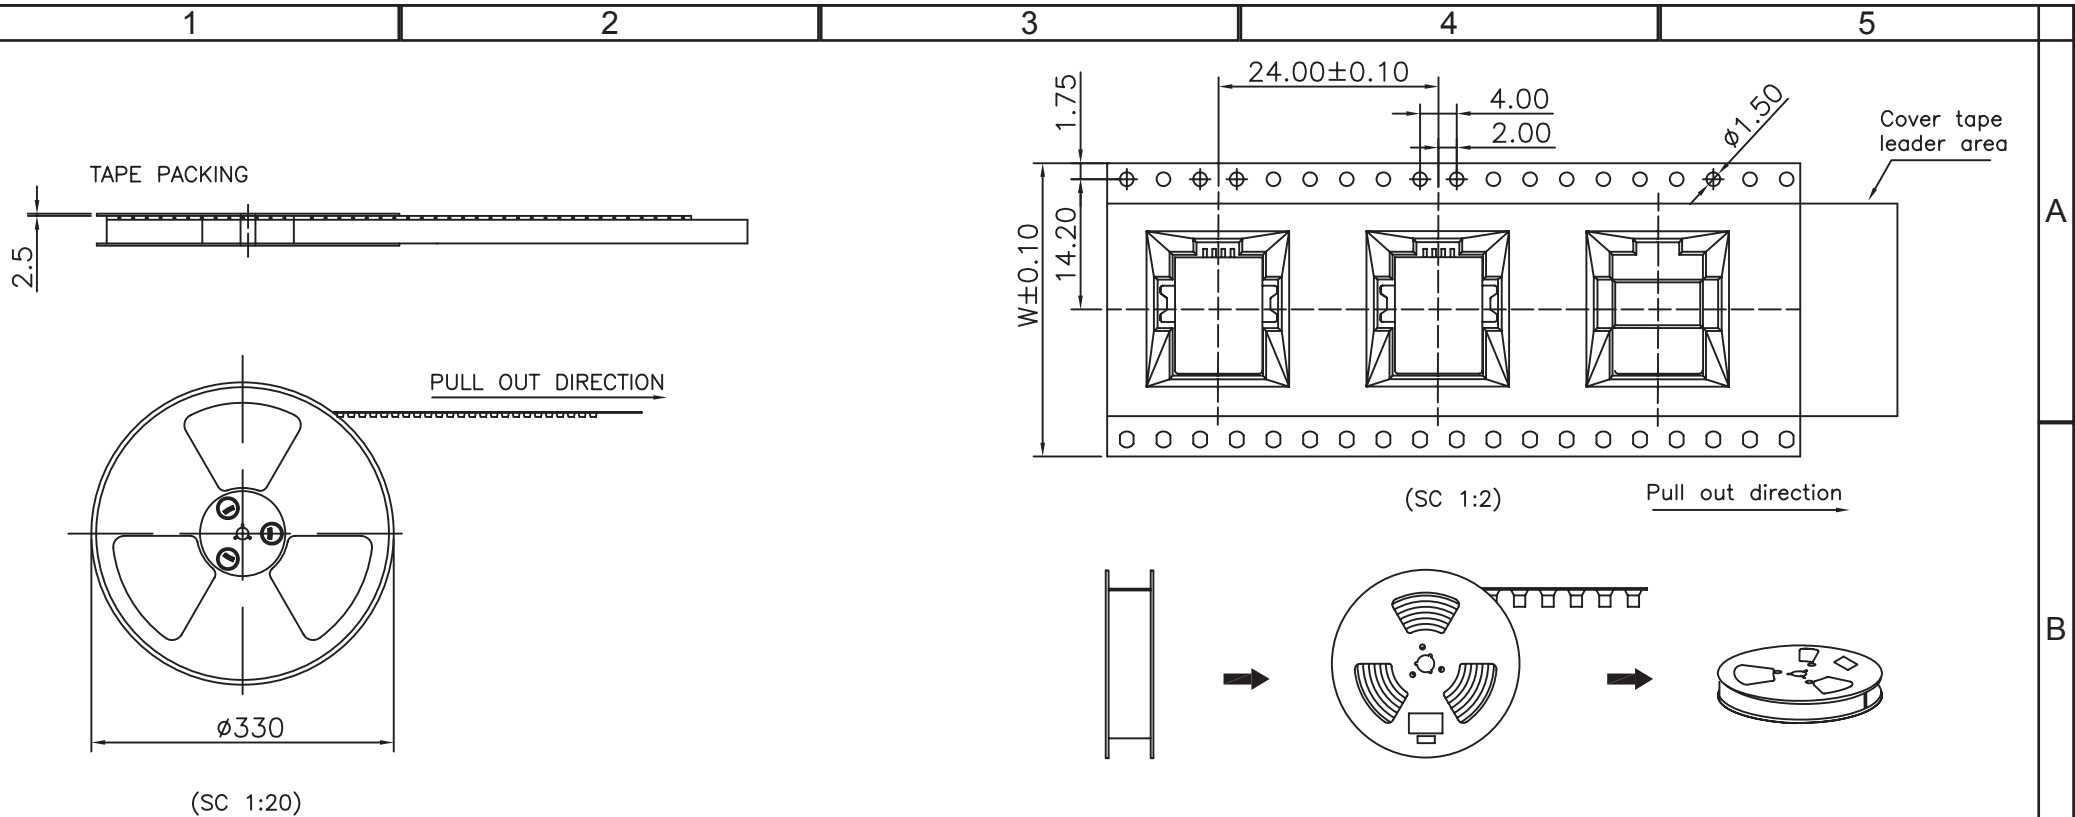

Carton (SC 1:40)

- Note:
- 1.Material : Black BK
 - 2.Thickness : 0.50±0.05mm
 - 3.Component load per 13" reel :150 pcs.
 - 4.Carton Size:350*350*296(mm)

Pin.	W	Pcs/R	R/Carton	Pcs/Carton
04	32	150	7	1050

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15			
						DESCRIPTION: USB BFEMALE RIGHT ANGLE SMD TYPE	SIZE	
							A4	
				APPROVAL: RJ	UNIT: MM	WERI PART NO: 629 104 161 21		
					SCALE:			
					SHEET: 2/2			
REV	DATE	FILE	BY		DRAW: MIKE			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com