


CONFIGURATION		PART NUMBER
Male Receptacle, 4 Pin, 16Awg & 2.5mm , Shell 14		RT00142PNH
DIMENSIONS		
 The technical drawings include: Side View: Shows the O-Ring Insert, Shell, and Seal Gasket. Dimensions include a height of 20.70, a shell diameter of 22.20, a mounting hole diameter of 13/16-20 UNEF, a shell thickness of 11.30, a gasket thickness of 1.80, and a maximum length of 32.5. Front View: Shows the MASTER KEYWAY and 4 mounting holes with a diameter of 3.20. Dimensions include a total width of 28.6, a keyway width of 23.00, and a shell diameter of 23.00. Panel Cut Out Reference: Shows the mounting hole pattern with a 23.00 diameter, 4 mounting holes of 3.20 diameter, and two larger diameters for front panel mounting (21.50) and rear panel mounting (25.00).		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	350V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:		
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	2-16Awg at 13A and 2-2.5mm at 23A	
CONTACT SIZE:	16Awg & 2.5mm	
APPROVALS:	UL ECBT2	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :

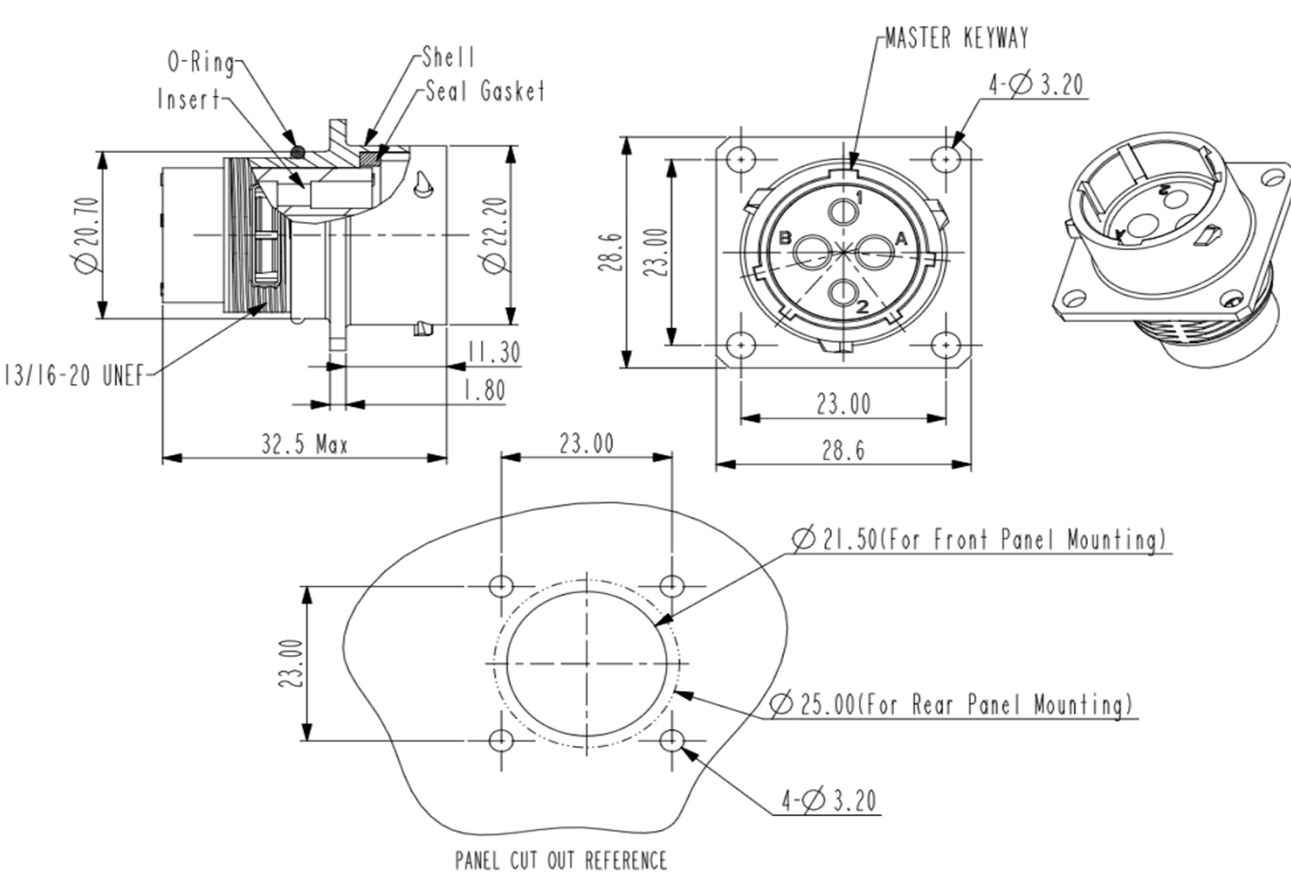

Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com